

FY2010

PICATINNY ARSENAL

Army Defense Environmental Restoration Program

Installation Action Plan

Printed 14 October 2010

(this page intentionally left blank)

Table of Contents

Statement Of Purpose.....	1
Approval.....	2
Acronyms.....	3
Installation Information.....	7
5-Year / Periodic Review Summary.....	9
Land Use Control (LUC) Summary.....	10
Cleanup Program Summary.....	16
Installation Restoration Program.....	17
IRP Summary.....	18
IRP Contamination Assessment.....	21
IRP Previous Studies.....	24
IRP Installation Map(s).....	44
Installation Restoration Program Site Descriptions.....	45
PBC Picatinny PBC.....	46
PICA-001 INACTIVE TETRYL WASTE PITS (SITES 17/18).....	47
PICA-002 LOWER BURNING GROUND (SITE 34).....	50
PICA-006 GUNCOTTON LINE (SITE 16).....	52
PICA-008 INACT. ROCKET FUEL TEST Areas.....	54
PICA-011 BLDG 60 SATELITE WSTE ACCOM AREA(SITE122.....	57
PICA-013 OPTS PROTO PROC FAC SITE BLDG 91(SITE78).....	59
PICA-015 LAKE DENMARK (SITE 54).....	61
PICA-020 PYROTECHNIC DEMO AREA (SITE 19).....	63
PICA-022 POWER PLNT/HAZ WST TNKS/PROPELL PRD.....	64
PICA-050 FORMER REACT MTRS/RCKT FUEL TST A 1500.....	67
PICA-057 PICATINNY LAKE (SITE 53).....	69
PICA-058 600 HILL GROUNDWATER PLUME.....	72
PICA-065 POST FARM LANDFILL (SITE 23).....	75
PICA-066 SANITARY LANDFILL(NEAR SITE 20)SITE 24.....	77
PICA-067 SANITIARY LANDFILL(NEAR SITE 26)SITE 25.....	79
PICA-071 DRUM STRG AREA(B31 YARD) SITE 29.....	80
PICA-072 FORMER GAS STATION/ DRMO(SITE 31).....	82
PICA-075 EQPMT & WASTE STORAGE IN 3000-AREA.....	84
PICA-076 FORM METL PLATG WSTWTR FAC/LAGOONS B-24	86

Table of Contents

PICA-077 Area E Groundwater (Site 38).....	89
PICA-079 ORDNANCE/EXPLOSIVE BLDGS 800 AREA.....	91
PICA-085 BLDGS IN 500-AREA.....	94
PICA-091 BLDGS IN 200-AREA.....	96
PICA-093 WASTE BURIAL AREA NEAR SITES 19&34(180).....	99
PICA-096 BLDG 22,PRECISION MACHINE SHOP(SITE 117).....	100
PICA-097 BLD 41,PESTICIDE STR & FORM OIL/W SEP.....	101
PICA-102 FORMER WASTE DUMP/CHEMICAL LAB.....	103
PICA-108 BLDGS in 400/300 AREA.....	104
PICA-111 FORMER BLDG 435,PROPELLANT SOLV MIXING	107
PICA-122 PROPELLANT TESTING (BLDG 197) SITE 126.....	110
PICA-134 R&D LAB/Chem Storage 3000-Area.....	112
PICA-135 BLDGS IN THE 900-AREA.....	113
PICA-136 HIGH PRESSURE BOILER (BLDG 3013) SITE 79.....	115
PICA-143 ORDNANCE FAC (BLDGS 717,722,732)SITE 108.....	116
PICA-155 TECUP BUILDINGS SITE 178.....	117
PICA-162 SHELL BURIAL AREAS NEAR SITE 5.....	118
PICA-163 Propellant/Rcket Prod 1300/1400 Area.....	120
PICA-171 ORDNANCE BLDG/EXPLOSIVES PROD.....	123
PICA-175 ORDNANCE BLDGS in 600-AREA.....	125
PICA-184 BUILDINGS(1600,1601,1609,1610) SITE 94.....	128
PICA-192 APPLE TREES RECREATIONAL AREA	129
PICA-193 GREEN POND AND BEAR SWAMP BROOK SITE 190.....	131
PICA-195 BLDGS IN 1400/1300/3100/1000 AREAS.....	133
PICA-199 FORMER PISTOL RANGE DUMP&NAVY MANURE PIT.....	135
PICA-200 AREA (L) OTHER BUILDINGS.....	136
PICA-204 MID-VALLEY GROUNDWATER.....	138
PICA-205 AREA B GROUNDWATER	139
PICA-206 AREA C GROUNDWATER.....	141
PICA-209 BUILDING 167, LOCOMOTIVE AREA, BLDG. 430.....	142
Installation Restoration Program Site Closeout (No Further Action) Sites Summary.....	144
IRP Schedule.....	151
Installation Restoration Program Milestones.....	151
IRP Schedule Chart.....	158
IRP Costs.....	162
IRP Prior Funding/Current Requirements.....	162
IRP Required Cost-to-Complete Chart.....	165

Table of Contents

IRP Programmed Cost-to-Complete Chart.....	170
Military Munitions Response Program.....	175
MMRP Summary.....	176
MMRP Contamination Assessment.....	177
MMRP Previous Studies.....	178
MMRP Installation Map(s).....	179
Military Munitions Response Program Site Descriptions.....	180
PBA@MR PICA PBA for MR sites at Picatinny.....	181
PICA-001-R-01 FormerMunitions&PropellantTest Area.....	182
PICA-003-R-01 1926 Explosion Radius.....	183
PICA-004-R-01 1926 EXPLOSION SITE-TD.....	185
PICA-005-R-01 Green Pond.....	187
PICA-006-R-01 Former Operational Areas.....	188
PICA-008-R-01 Lakes.....	190
PICA-010-R-01 Shell Burial Grounds.....	192
PICA-012-R-01 Lake Denmark - Off-Post.....	194
PICA-013-R-01 Inactive Munitions Waste Pit.....	195
PICA-014-R-01 Inactive Munitions Waste Pit - TD.....	196
Military Munitions Response Program Site Closeout (No Further Action) Sites Summary.....	197
Military Munitions Response Program Schedule.....	198
Military Munitions Response Program Milestones.....	198
MMRP Schedule Chart.....	199
Military Munitions Response Program Costs.....	201
MMRP Prior Funding/Current Requirements.....	201
MMRP Required Cost-to-Complete Chart.....	203
MMRP Programmed Cost-to-Complete Chart.....	205
Compliance Restoration.....	207
CR Summary.....	208
CR Contamination Assessment.....	209
CR Previous Studies.....	211
Compliance Restoration Site Descriptions.....	212
CC-055 MTBE Contaminated GW in 600 Area.....	213

Table of Contents

CC-057 Former Skeet Range.....	214
Compliance Restoration Site Closeout (No Further Action) Sites Summary.....	215
Compliance Restoration Schedule.....	216
Compliance Restoration Milestones.....	216
CR Schedule Chart.....	217
CR Costs.....	218
CR Prior Funding/Current Requirements.....	218
CR Required Cost-to-Complete Chart.....	219
CR Programmed Cost-to-Complete Chart.....	220
Combined Requirements Spreadsheet.....	221
Costs - Combined Requirements Spreadsheet.....	221
Combined Programmed Spreadsheet.....	227
Costs - Combined Programmed Spreadsheet.....	227
Community Involvement.....	233

Statement of Purpose

The purpose of the Installation Action Plan (IAP) is to outline the total multiyear cleanup program for an installation. The plan identifies environmental cleanup requirements at each site or area of concern (AOC), and proposes a comprehensive, installation-wide approach, along with the costs and schedules associated with conducting investigations and taking the necessary remedial actions (RAs).

In an effort to coordinate planning information between the restoration manager, the US Army Environmental Command (USAEC), Picatinny Arsenal (PTA), the executing agencies, the regulatory agencies, and the public, an IAP was completed. The IAP is used to track requirements, schedules, and tentative budgets for all major Army installation cleanup programs.



All site-specific funding and schedule information has been prepared according to projected overall Army funding levels and is, therefore, subject to change.

The following persons contributed to the formulation and completion of this Installation Action Plan for PICATINNY ARSENAL:

Coulters, Francis
Gabel, Ted
Jordan, Brian
Young, Layne

USAEC
Picatinny Arsenal
Malcolm Pirnie, Inc. for USAEC
Malcolm Pirnie, Inc. for USAEC

PICATINNY ARSENAL
Installation Action Plan Approval Signatures

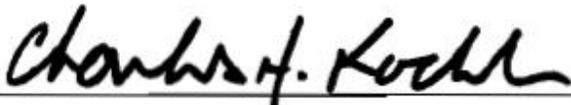	
CHARLES H. KOEHLER Lieutenant Colonel, US Army Garrison Commander	Date

Acronyms

AEDB-R	Army Environmental Database - Restoration
ANL	Argonne National Laboratory
AOC	Area of Concern
AP	Armor Piercing
ARAR	Applicable or Relevant and Appropriate Requirement
ARDEC	Armament Research, Development and Engineering Center
AST	Aboveground Storage Tank
AWDF	Advanced Warhead Development Facility
BERA	Baseline Ecological Risk Assessment
bgs	below ground surface
BNA	Base Neutral Acid
BRAC	Base Realignment and Closure
BSB	Bear Swamp Brook
BTEX	Benzene, Toluene, Ethylbenzene, Xylene
CA	Contamination Assessment
CC	Compliance-related Cleanup
CDC	Childcare Development Center
CEI	Compliance Evaluation Inspection
CERCLA	Comprehensive Environmental Response, Compensation and Liability Act of 1980
COC	Chemical of Concern
COPC	Contaminants of Potential Concern
COPEC	Contaminants of Potential Ecological Concern
CR	Compliance Restoration
CSM	Conceptual Site Model
CTC	Cost-to-Complete
cy	cubic yards
DBA	Drum Burial Area
DDD	Dichlorodiphenyldichloroethane
DDE	Dichlorodiphenyldichloroethene
DDT	Dichloro-diphenyl-trichloroethane
DEH	Directorate of Engineering and Housing
DMM	Discarded Military Munitions
DNT	Dinitrotoluene
DoD	Department of Defense
DRMO	Defense Reutilization and Marketing Office
DSERTS	Defense Site Environmental Restoration Tracking System
DSMOA	Defense and State Memorandum of Agreement
DU	Depleted Uranium
EE/CA	Engineering Evaluation/Cost Analysis
EEQ	Environmental Effects Quotient
EOD	Explosive Ordnance Disposal
ER	Emergency Removal
ER,A	Environmental Restoration, Army
ERA	Ecological Risk Assessment
ERF	Electromagnetic Research Facility

Acronyms

FS	Feasibility Study
FY	Fiscal Year
GCL	Guncotton Line
GIS	Geographic Information System
GPB	Green Pond Brook
GW	Groundwater
HE	High Explosives
HHRA	Human Health Risk Assessment
HI	Hazard Index
HQ	Hazard Quotient
HRC	Hydrogen Releasing Compound
HRR	Historical Records Review
IAP	Installation Action Plan
IC	Institutional Controls
ICM	Improved Conventional Munitions
IMCOM	Installation Management Command
IR	Installation Restoration
IRA	Interim Removal Action
IRP	Installation Restoration Program
K	thousand
kg	kilogram
LF	Landfill
LOC	Level of Concern
LTM	Long-Term Management
LUC	Land Use Control
LUCIP	Land Use Control Implementation Plan
MC	Munitions Constituents
MCL	Maximum Contaminant Level
MEC	Munitions and Explosives of Concern
mg	milligram
mg/kg	milligram per kilogram
mm	millimeter
MMRP	Military Munitions Response Program
MNA	Monitored Natural Attenuation
MR	Munitions Response
MRS	Munitions Response Site
MRSPP	Munitions Response Site Prioritization Protocol
MTBE	Methyl Tert butyl Ether
N/A	Not Applicable
NARTS	Naval Air Rockets Test Station
NC	Nitrocellulose
NCP	National Oil and Hazardous Substance Pollution Contingency Plan
NFA	No Further Action
NG	Nitroglycerine
NJ	New Jersey

Acronyms

NJDEP	New Jersey Department of Environmental Protection
NJPDES	New Jersey Pollutant Discharge Elimination System
NPL	National Priorities List
OE	Ordnance/Explosive
P&T	Pump-and-Treat
PA	Preliminary Assessment
PAH	Polycyclic Aromatic Hydrocarbon
PBC	Performance-Based Contract
PCB	Polychlorinated Biphenyl
PCE	Tetrachloroethylene
PHS&T	Packaging, Handling, Storage, and Transportation Center
PICA	AEDB-R abbreviation for Picatinny Arsenal site
POL	Petroleum, Oil and Lubricants
PP	Proposed Plan
ppb	parts per billion
ppm	parts per million
PRB	Permeable Reactive Barrier
PTA	Picatinny Arsenal
R&D	Research and Development
RA	Remedial Action
RA(C)	Remedial Action (Construction)
RA(O)	Remedial Action (Operation)
RAB	Restoration Advisory Board
RACER	Remedial Action Cost Engineering and Requirements
RAR	Remedial Action Report
RC	Response Complete
RCI	Residential Community Initiative
RCRA	Resource Conservation and Recovery Act
RD	Remedial Design
RDX	Cyclotrimethylenetrinitramine
RFA	RCRA Facility Assessment
RG	Remediation Goal
RI	Remedial Investigation
RIP	Remedy-in-Place
RMD	Reaction Motors Division
ROD	Record of Decision
RRSE	Relative Risk Site Evaluation
RSA	Rodent Sperm Analysis
RTI	Radiation Technologies, Inc.
SC&RA	Site Characterization and Removal Assessment
SDZ	Surface Danger Zone
SI	Site Inspection
SLERA	Screening Level Ecological Risk Assessment
SVE	Soil Vapor Extraction
SVOC	Semi-Volatile Organic Compound

Acronyms

SWMU	Solid Waste Management Unit
TAL	Target Analyte List
TAPP	Technical Assistance for Public Participation
TCE	Trichloroethylene
TCLP	Toxicity Characteristic Leaching Procedure
TCRA	Time-Critical Removal Action
TECUP	Toxic and Energetics Cleanup Program
TERC	Total Environmental Restoration Contract
Tetryl	2,4,6-Trinitrophenylmethylnitramine
TNT	Trinitrotoluene
TPH	Total Petroleum Hydrocarbons
TRC	Technical Review Committee
ug/L	micrograms per liter
USACHPPM	US Army Center for Health Promotion and Preventive Medicine
USAEC	United States Army Environmental Command
USAEHA	United States Army Environmental Hygiene Agency
USATHAMA	United States Army Toxic and Hazardous Materials Agency
USEPA	United States Environmental Protection Agency
USGS	United States Geological Survey
UST	Underground Storage Tank
UXO	Unexploded Ordnance
VOC	Volatile Organic Compound
WWI	World War I
WWII	World War II

Installation Information

Installation Locale

Installation Size (Acreage): 6491

City: Dover

County: Morris

State: New Jersey (NJ)

Other Locale Information

Picatinny Arsenal is a 6,491 acre government-operated munitions research and development (R&D) facility located in Morris County, New Jersey (NJ), approximately 40 miles west of New York City and four miles northeast of Dover, NJ. The arsenal sits in the Highlands of NJ; however, the arsenal is exempt from the Highlands regulation.

Installation Mission

Picatinny Arsenal was established in 1880 by the US War Department as a storage and powder depot. Later it was expanded to assemble powder charges for cannons and to fill projectiles with maximite (a propellant). During World War I (WWI), PTA produced all sizes of projectiles. In the years following WWI, PTA began projectile melt-loading operations and began to manufacture pyrotechnic signals and flares on a production basis. During World War II (WWII), PTA produced artillery ammunition, bombs, high explosives (HEs), pyrotechnics, and other ordnance. After WWII, PTA's primary role became the research and engineering of new ordnance; however, during the Korean and Vietnam conflicts, PTA resumed the production and development of explosives, ammunition and mine systems.

In recent years, PTA's mission has shifted to conducting and managing research development, life cycle engineering, and support of other military weapons and weapon systems. The facility has responsibility for the R&D of armament items. Picatinny Arsenal has also entered into an enhanced usage leasing program for certain acreage at the southern part of the arsenal as well as the leasing of buildings to third parties in the 350 area of Picatinny. Congress has agreed with the Department of Defense (DoD) through the Base Realignment and Closure (BRAC) process that Picatinny not be closed, but remain open and take in more missions. Seven other DoD sites are now being realigned at Picatinny including parts of Adelphi Laboratory Center and laboratories associated with the Naval Surface Warfare Center Division Crane.

Lead Organization

IMCOM - Northeast

Lead Executing Agencies for Installation

USAEC for the performance-based contract (PBC) with ARCADIS Inc.

PTA with Baltimore Corps of Engineers for the Military Munitions Response Program (MMRP) sites

PTA with Baltimore Corps on other non-PBC sites with ARCADIS

Regulator Participation

Federal US Environmental Protection Agency (USEPA) Region II, Federal Facilities Section

State New Jersey Department of Environmental Protection (NJDEP)

National Priorities List (NPL) Status

A score of 43.1 was recorded on 01-FEB-90.

Date for RA(C) Completion: 201609

Date for NPL Deletion: TBD

Installation Information

Installation Restoration Advisory Board (RAB)/Technical Review Committee (TRC)/Technical Assistance for Public Participation (TAPP) Status

RAB established 199512

Installation Program Summaries

IRP

Primary Contaminants of Concern: Dioxins/Dibenzofurans, Explosives, Metals, Munitions and explosives of concern (MEC), Perchlorate, Pesticides, Petroleum, Oil and Lubricants (POL), Polychlorinated Biphenyls (PCB), Polycyclic Aromatic Hydrocarbons (PAH), Radionuclides, Semi-volatiles (SVOC), Volatiles (VOC)

Affected Media of Concern: Groundwater, Sediment, Soil, Surface Water

Estimated Date for Remedy-In-Place (RIP)/Response Complete (RC): 201409/202709

Prior Funding: \$114,753.0 K

Current Requirements: \$.0 K

Future Requirements: \$9,607.0 K

MMRP

Primary Contaminants of Concern: Munitions and explosives of concern (MEC), Munitions constituents (MC)

Affected Media of Concern: Groundwater, Sediment, Soil, Surface Water

Estimated Date for Remedy-In-Place (RIP)/Response Complete (RC): 201609/201609

Prior Funding: \$13,183.0 K

Current Requirements: \$.0 K

Future Requirements: \$68,923.0 K

CR

Primary Contaminants of Concern: Metals, Semi-volatiles (SVOC), Volatiles (VOC)

Affected Media of Concern: Groundwater, Sediment, Soil

Estimated Date for Remedy-In-Place (RIP)/Response Complete (RC): 201212/201212

Prior Funding: \$.0 K

Current Requirements: \$.0 K

Future Requirements: \$1,955.0 K

5-Year / Periodic Review Summary

5-Year / Periodic Review Summary

Status	Start Date	End Date	End FY
Complete	200602	200610	2007
Planned	201011	201106	2011

Last Completed 5-Year / Periodic Review Details

Associated ROD/DD Name	Sites
Burning Ground Cap (Matcon)	PICA-002
EE/CA for removal action	PICA-011
LUC for Soils at Sites 19, 28, 44, etc	PICA-020, PICA-036, PICA-070, PICA-083, PICA-088, PICA-092, PICA-095, PICA-099, PICA-100, PICA-105, PICA-110, PICA-112, PICA-118
Post Farm Landfill	PICA-065
ROD for Green Pond/Bear Swamp Brooks	PICA-193
ROD for PICA 066- Site 20/24	PICA-066
ROD for PICA 076- Area D Groundwater	PICA-076
Removal Action D.D. of PCB impacted soil	PICA-011

Results The 5 Year review was completed and EPA agreed with the results which basically required that Army completed actions in Proposed Plan and FS stage

Actions Army will and have taken actions to complete documents and do action

Plans Ongoing.

Recommendations and Implementation Plans:

Land Use Control (LUC) Summary

LUC Title: LUC at PICA-065

Site(s): PICA-065

ROD/DD Title: Post Farm Landfill

Location of LUC

Post Farm

Land Use Restriction: Landfill restriction - Prohibit activities that would impact the LF cap (or cover system) and drainage system, Landfill restriction - Prohibit excavation on LF cap or cover system, Landfill restriction - Restrict access to the site, Media specific restriction - Prohibit, or otherwise manage excavation below a specified depth, Media specific restriction - prohibit use of groundwater for consumption or domestic purposes, Media specific restriction - restrict drinking water well installation, Media specific restriction - restrict withdrawal or use of groundwater for agricultural/irrigation purposes, Media specific restriction - restrict withdrawal or use of groundwater w/out treatment, Restrict land use - No daycare/hospital/school use, Restrict land use - No residential use

Types of Engineering Controls: Fences, Signs

Types of Institutional Controls: Dig Permits, Education programs, Notations in Master Plan, Notices (in the grantor/grantee index, newspapers, etc.), Restrictions on land use

Date in Place: 200709

Modification Date: N/A

Date Terminated: N/A

Inspecting Organization: Installation

Record of LUC: Master Plan or Equivalent

Documentation Date: 200706

LUC Enforcement: Annual Inspections, 5 Year Reviews, Markers, Other

Contaminants: METALS, PAH, PCBs, VOC

Additional Information

This groundwater is part of the sitewide Classified Exemption Area per NJDEP Regulations

LUC Title: LUC at PICA-067

Site(s): PICA-067

ROD/DD Title: ROD for Sanitary Landfill & Dredge Pile

Location of LUC

Sanitary Landfill and Dredge Pile

Land Use Restriction: Media specific restriction - Prohibit, or otherwise manage excavation, Media specific restriction - Prohibit, or otherwise manage excavation below a specified depth, Restrict land use - No daycare/hospital/school use, Restrict land use - No residential use

Types of Engineering Controls: Signs

Types of Institutional Controls: Dig Permits, Education programs, Notations in Master Plan, Notices (in the grantor/grantee index, newspapers, etc.), Restrictions on land use

Date in Place: 200809

Modification Date: N/A

Date Terminated: N/A

Inspecting Organization: Installation

Record of LUC: Master Plan or Equivalent

Documentation Date: 200809

LUC Enforcement: Annual Inspections, 5 Year Reviews, Other

Land Use Control (LUC) Summary

Contaminants: METALS, PAH, PCBs

Additional Information

N/A

LUC Title: LUC at PICA-077

Site(s): PICA-077

ROD/DD Title: ROD for Area E Groundwater

Location of LUC

Area E

Land Use Restriction: Media specific restriction - Prohibit groundwater extraction that interferes with Remedial Action system, Media specific restriction - prohibit use of groundwater for consumption or domestic purposes, Media specific restriction - restrict drinking water well installation, Media specific restriction - restrict withdrawal or use of groundwater for agricultural/irrigation purposes, Media specific restriction - restrict withdrawal or use of groundwater w/out treatment

Types of Engineering Controls: None

Types of Institutional Controls: Education programs, Notations in Master Plan, Notices (in the grantor/grantee index, newspapers, etc.), Restrictions on land use

Date in Place: 200709

Modification Date: N/A

Date Terminated: N/A

Inspecting Organization: Installation

Record of LUC: Master Plan or Equivalent

Documentation Date: 200709

LUC Enforcement: Annual Inspections, 5 Year Reviews, Other

Contaminants: VOC

Additional Information

This groundwater is part of the sitewide Classified Exemption Area per NJDEP Regulations

LUC Title: LUC at PICA-193

Site(s): PICA-193

ROD/DD Title: ROD for Green Pond/Bear Swamp Brooks

Location of LUC

Green Pond & Bear Swamp Brooks

Land Use Restriction: Media specific restriction - Prohibit fishing except for recreational purposes (catch and release), Restrict land use - No daycare/hospital/school use, Restrict land use - No residential use

Types of Engineering Controls: Signs

Types of Institutional Controls: Dig Permits, Education programs, Notations in Master Plan, Restrictions on land use

Date in Place: 200709

Modification Date: N/A

Date Terminated: N/A

Inspecting Organization: Installation

Record of LUC: Master Plan or Equivalent

Documentation Date: 200709

Land Use Control (LUC) Summary

LUC Enforcement: Annual Inspections, 5 Year Reviews, Other

Contaminants: METALS, PAH, PCBs, PESTICIDES

Additional Information

N/A

LUC Title: LUC for Area B Groundwater

Site(s): PICA-205

ROD/DD Title: ROD for Area B Groundwater

Location of LUC

Southern Part of Picatinny at Site 20/24

Land Use Restriction: Landfill restriction - Prohibit activities that would impact the LF cap (or cover system) and drainage system, Landfill restriction - Prohibit excavation on LF cap or cover system, Media specific restriction - prohibit use of groundwater for consumption or domestic purposes, Media specific restriction - restrict drinking water well installation, Media specific restriction - restrict withdrawal or use of groundwater w/out treatment, Restrict land use - Mitigation area(s) protection, Restrict land use - No residential use

Types of Engineering Controls: Guards, Markers, Signs

Types of Institutional Controls: Construction Permit, Dig Permits, Notations in Master Plan, Restrictions on land use

Date in Place: 200905

Modification Date: N/A

Date Terminated: N/A

Inspecting Organization: EPA

Record of LUC: Master Plan or Equivalent

Documentation Date: N/A

LUC Enforcement: Annual Inspections, 5 Year Reviews, Markers

Contaminants: VOC

Additional Information

This groundwater is part of the sitewide Classified Exemption Area per NJDEP Regulations

LUC Title: LUC for PICA 72/Site 31

Site(s): PICA-072

ROD/DD Title: ROD for Site 31/101 (PICA 072) Soil

Location of LUC

Area is defined in the remedial design and contains two sites (RI Site 31 and 101)

Land Use Restriction: Landfill restriction - Prohibit excavation on LF cap or cover system, Landfill restriction - Prohibit installation of utility system lines through the site, Media specific restriction - Prohibit, or otherwise manage excavation, Restrict land use - Mitigation area(s) protection, Restrict land use - No daycare/hospital/school use, Restrict land use - No residential use

Types of Engineering Controls: Fences, Markers, Signs

Types of Institutional Controls: Construction Permit, Dig Permits, Education programs, Notations in Master Plan, Restrictions on land use

Date in Place: 200906

Modification Date: N/A

Date Terminated: N/A

Inspecting Organization: EPA

Land Use Control (LUC) Summary

Record of LUC: Master Plan or Equivalent

Documentation Date: N/A

LUC Enforcement: Annual Inspections, 5 Year Reviews, Markers

Contaminants: INORGANICS, PCBs, Unexploded Ordnance(UXO)

Additional Information

N/A

LUC Title: LUC for PICA-066, 20/24

Site(s): PICA-066

ROD/DD Title: ROD for PICA 066- Site 20/24

Location of LUC

Site 20/24, Area B

Land Use Restriction: Landfill restriction - Prohibit activities that would impact the LF cap (or cover system) and drainage system, Landfill restriction - Prohibit excavation on LF cap or cover system, Landfill restriction - Restrict access to the site, Media specific restriction - Prohibit, or otherwise manage excavation below a specified depth, Restrict land use - No daycare/hospital/school use, Restrict land use - No residential use

Types of Engineering Controls: Signs

Types of Institutional Controls: Dig Permits, Education programs, Notations in Master Plan, Notices (in the grantor/grantee index, newspapers, etc.), Restrictions on land use

Date in Place: 200309

Modification Date: N/A

Date Terminated: N/A

Inspecting Organization: Installation

Record of LUC: Master Plan or Equivalent

Documentation Date: 200309

LUC Enforcement: Annual Inspections, 5 Year Reviews

Contaminants: METALS, PCBs, PESTICIDES

Additional Information

N/A

LUC Title: LUC for PICA-076

Site(s): PICA-076

ROD/DD Title: ROD for PICA 076- Area D Groundwater

Location of LUC

Area D, Downtown Picatinny Groundwater

Land Use Restriction: Media specific restriction - prohibit use of groundwater for consumption or domestic purposes, Media specific restriction - restrict drinking water well installation, Media specific restriction - restrict withdrawal or use of groundwater for agricultural/irrigation purposes, Media specific restriction - restrict withdrawal or use of groundwater w/out treatment

Types of Engineering Controls: None

Types of Institutional Controls: Dig Permits, Notations in Master Plan, Restrictions on Groundwater Withdrawal, Restrictions on land use

Date in Place: 200708

Land Use Control (LUC) Summary

Modification Date: N/A
Date Terminated: N/A
Inspecting Organization: Installation
Record of LUC: Master Plan or Equivalent
Documentation Date: 200708
LUC Enforcement: Annual Inspections, 5 Year Reviews
Contaminants: VOC
Additional Information
This groundwater is part of the sitewide Classified Exemption Area per NJDEP Regulations

LUC Title: LUC for PICA-093
Site(s): PICA-093
ROD/DD Title: ROD for Waste Burial Area, PICA-093
Location of LUC
Waste Burial Area
Land Use Restriction: Media specific restriction - Prohibit, or otherwise manage excavation, Media specific restriction - Prohibit, or otherwise manage excavation below a specified depth
Types of Engineering Controls: Signs
Types of Institutional Controls: Education programs, Notations in Master Plan, Notices (in the grantor/grantee index, newspapers, etc.), Restrictions on land use
Date in Place: 200709
Modification Date: N/A
Date Terminated: N/A
Inspecting Organization: Installation
Record of LUC: Master Plan or Equivalent
Documentation Date: 200709
LUC Enforcement: Annual Inspections, 5 Year Reviews
Contaminants: DIOXINS/DIBENZOFURANS, METALS, PCBs
Additional Information
N/A

LUC Title: LUCs for AREA C
Site(s): PICA-206
ROD/DD Title: Area C GW ROD
Location of LUC
Area C (Southern Picatinny)
Land Use Restriction: Media specific restriction - Prohibit groundwater extraction that interferes with Remedial Action system, Media specific restriction - prohibit use of groundwater for consumption or domestic purposes, Restrict land use - No residential use
Types of Engineering Controls: Signs
Types of Institutional Controls: Dig Permits, Education programs, Notations in Master Plan, Restrictions on Groundwater Withdrawal, Restrictions on land use
Date in Place: 200910

Land Use Control (LUC) Summary

Modification Date: N/A
Date Terminated: N/A
Inspecting Organization: EPA
Record of LUC: Master Plan or Equivalent
Documentation Date: 200910
LUC Enforcement: Annual Inspections, 5 Year Reviews, Markers
Contaminants: INORGANICS, ORGANICS
Additional Information
N/A

LUC Title: LUCs for Group 3

Site(s): PICA-008

ROD/DD Title: Record of Decision for Group 3 Gw and Sw

Location of LUC

Group 3 near the 3500 area of Picatinny

Land Use Restriction: Media specific restriction - restrict drinking water well installation, Restrict land use - No daycare/hospital/school use, Restrict land use - No residential use

Types of Engineering Controls: Markers

Types of Institutional Controls: Dig Permits, Restrictions on Groundwater Withdrawal, Restrictions on land use

Date in Place: 201009

Modification Date: N/A

Date Terminated: N/A

Inspecting Organization: EPA

Record of LUC: Master Plan or Equivalent

Documentation Date: 200709

LUC Enforcement: Annual Inspections, 5 Year Reviews, Markers

Contaminants: VOC

Additional Information

N/A

Cleanup Program Summary

Installation Historic Activity

Picatinny Arsenal was established in 1880 by the US War Department as a storage and powder depot. Later it was expanded to assemble powder charges for cannons and to fill projectiles with maximate (a propellant). During WWI, PTA produced all sizes of projectiles. In the years following WWI, PTA began projectile melt-loading operations and began to manufacture pyrotechnic signals and flares on a production basis. During WWII, PTA produced artillery ammunition, bombs, HEs, pyrotechnics, and other ordnance. After WWII, PTA's primary role became the research and engineering of new ordnance; however, during the Korean and Vietnam conflicts, PTA resumed the production and development of explosives, ammunition, and mine systems.

In recent years, PTA's mission has shifted to conducting and managing research development, life cycle engineering, and support of other military weapons and weapon systems. The facility has responsibility for the R&D of armament items.

Installation Program Cleanup Progress

IRP

Prior Year Progress: The records of decision (RODs) were signed or are anticipated to be signed by end of fiscal year (FY) for PICA-079, PICA-008, and PICA-013.

The remedies-in-place (RIPs) were completed for PICA-079, PICA-008, and PICA-013.

A contract was awarded for the long-term management (LTM) at PICA-206.

Future Plan of Action: The PBC contract requires that cleanup at various sites will be completed. A PBC award for the implementation of the RODs at PICA 58 and PICA-111 is anticipated.

MMRP

Prior Year Progress: Munitions and explosives of concern (MEC) construction support under the interim remedial action (IRA) phase is underway for sites PICA-003-R-01, PICA-006R-01, and PICA-008-R-01. An action memorandum was signed for Tilcon 3 RA. The plan was implemented but stopped since debris was thrown from disposal area to Picatinny residential area. The engineering evaluation/cost analysis (EE/CA) for the residential community initiative (RCI) was approved by regulators. A public notice is expected shortly.

Future Plan of Action: A remedial investigation/feasibility study (RI/FS) is anticipated to start in FY10.

Continued construction support.

CR

Prior Year Progress: CC-055 and CC-057 were added to the compliance restoration (CR) program and are included in the FY10 IAP.

Sampling was completed for two additional wells at CC-055 and for the soil at CC-057. A contract was awarded to conduct additional work at the sites.

Future Plan of Action: Depending on the sampling results at CC-055, either an FS and a proposed plan (PP) will be completed or the site will be no further action (NFA).

Depending on the sampling results at CC-057, either an FS and a PP will be completed or a removal action will be conducted.

PICATINNY ARSENAL
Army Defense Environmental Restoration Program
Installation Restoration Program

IRP Summary

Installation Total Army Environmental Database-Restoration (AEDB-R) Sites/Closeout Sites Count: 176/126

Installation Site Types with Future and/or Underway Phases

1	Above Ground Storage Tank (PICA-022)
2	Building Demolition/Debris Removal (PICA-008, PICA-155)
1	Burn Area (PICA-002)
11	Contaminated Buildings (PICA-096, PICA-111, PICA-122, PICA-134, PICA-135, PICA-143, PICA-184, PICA-199, PICA-200, PICA-205, PICA-209)
1	Contaminated Fill (PICA-192)
6	Contaminated Ground Water (PBC Picatinny, PICA-013, PICA-058, PICA-079, PICA-204, PICA-206)
3	Contaminated Sediments (PICA-015, PICA-057, PICA-193)
1	Disposal Pit/Dry Well (PICA-001)
1	Explosive Ordnance Disposal Area (PICA-162)
4	Landfill (PICA-065, PICA-066, PICA-067, PICA-093)
1	Oil Water Separator (PICA-097)
5	Spill Site Area (PICA-020, PICA-050, PICA-091, PICA-108, PICA-136)
8	Storage Area (PICA-011, PICA-071, PICA-072, PICA-075, PICA-085, PICA-171, PICA-175, PICA-195)
2	Surface Disposal Area (PICA-102, PICA-163)
1	Waste Lines (PICA-006)
2	Waste Treatment Plant (PICA-076, PICA-077)

Most Widespread Contaminants of Concern

Dioxins/Dibenzofurans, Explosives, Metals, Munitions and explosives of concern (MEC), Perchlorate, Pesticides, Petroleum, Oil and Lubricants (POL), Polychlorinated Biphenyls (PCB), Polycyclic Aromatic Hydrocarbons (PAH), Radionuclides, Semi-volatiles (SVOC), Volatiles (VOC)

Media of Concern

Groundwater, Sediment, Soil, Surface Water

Completed Remedial Actions (Interim Remedial Actions/ Final Remedial Actions (IRA/FRA))

Site ID	Site Name	Action	Remedy	FY	Cost
PICA-089	PETROLEUM LEAK AREA(BLDG 305)SITE 52	IRA	WASTE REMOVAL - SOILS	1986	TBD
PICA-073	BLDG 553 STORAGE TANKS(SITE 32)	IRA	WASTE REMOVAL - DRUMS, TANKS, BULK CONTAINERS	1991	\$1.2 K
PICA-074	BLDG 527A STORAGE TANKS (SITE 33)	IRA	WASTE REMOVAL - DRUMS, TANKS, BULK CONTAINERS	1991	TBD
PICA-083	Golf Course Maintenance(BLDG 39)SITE 44	IRA	WASTE REMOVAL - SOILS	1991	TBD

IRP Summary

Completed Remedial Actions (Interim Remedial Actions/ Final Remedial Actions (IRA/FRA))

Site ID	Site Name	Action	Remedy	FY	Cost
PICA-123	FORMER HAZ WASTE STOR/FUSE ASS(BLDG 210)	IRA	WASTE REMOVAL - DRUMS, TANKS, BULK CONTAINERS	1991	TBD
PICA-136	HIGH PRESSURE BOILER (BLDG 3013) SITE 79	IRA	WASTE REMOVAL - SOILS	1992	\$1.9 K
PICA-065	POST FARM LANDFILL (SITE 23)	FRA	WASTE REMOVAL - DRUMS, TANKS, BULK CONTAINERS	1993	TBD
PICA-072	FORMER GAS STATION/ DRMO(SITE 31)	IRA	FENCE OR OTHER SITE ACCESS CONTROL MEASURES	1993	\$738.9 K
PICA-011	BLDG 60 SATELITE WSTE ACCOM AREA(SITE122	IRA	REMOVAL	2000	\$47.7 K
PICA-050	FORMER REACT MTRS/RCKT FUEL TST A 1500	IRA	WASTE REMOVAL - DRUMS, TANKS, BULK CONTAINERS	2002	\$70.0 K
PICA-001	INACTIVE TETRYL WASTE PITS (SITES 17/18)	IRA	REMOVAL	2005	\$185.0 K
PICA-111	FORMER BLDG 435,PROPELLANT SOLV MIXING	IRA	WASTE REMOVAL - SOILS	2005	TBD
PICA-193	GREEN POND AND BEAR SWAMP BROOK SITE 190	IRA	WASTE REMOVAL - SOILS	2005	TBD
PICA-209	BUILDING 167, LOCOMOTIVE AREA, BLDG. 430	IRA	WASTE REMOVAL - SOILS	2005	TBD
PICA-076	FORM METL PLATG WSTWTR FAC/LAGOONS B- 24	IRA	GROUND WATER TREATMENT	2006	\$20.0 K
PICA-065	POST FARM LANDFILL (SITE 23)	FRA	INSTITUTIONAL CONTROLS	2007	\$60.0 K
PICA-067	SANITARY LANDFILL(NEAR SITE 26)SITE 25	FRA	CAPPING	2007	\$222.0 K
PICA-076	FORM METL PLATG WSTWTR FAC/LAGOONS B- 24	FRA	SLURRY WALLS/UNDERGROUND BARRIERS	2007	\$754.0 K
PICA-077	Area E Groundwater (Site 38)	FRA	NATURAL ATTENUATION	2007	\$50.0 K
PICA-093	WASTE BURIAL AREA NEAR SITES 19&34(180)	FRA	FENCE OR OTHER SITE ACCESS CONTROL MEASURES	2007	\$400.0 K
PICA-193	GREEN POND AND BEAR SWAMP BROOK SITE 190	FRA	REMOVAL	2007	\$140.0 K
PICA-102	FORMER WASTE DUMP/CHEMICAL LAB	FRA	REMOVAL	2008	TBD
PICA-205	AREA B GROUNDWATER	FRA	BIOREMEDIATION - IN SITU GROUNDWATER	2008	TBD
PICA-205	AREA B GROUNDWATER	FRA	NATURAL ATTENUATION	2008	TBD
PBC	PBC	FRA	OTHER	2009	TBD
Picatiny PICA-072	FORMER GAS STATION/ DRMO(SITE 31)	FRA	REMOVAL	2009	TBD
PICA-008	INACT. ROCKET FUEL TEST Areas	FRA	CHEMICAL REDUCTION/OXIDATION	2010	TBD
PICA-072	FORMER GAS STATION/ DRMO(SITE 31)	FRA	CAPPING	2010	TBD
PICA-079	ORDNANCE/EXPLOSIVE BLDGS 800 AREA	FRA	REMOVAL	2010	TBD
PICA-079	ORDNANCE/EXPLOSIVE BLDGS 800 AREA	FRA	NATURAL ATTENUATION	2010	TBD

IRP Summary

Total Environmental Restoration, Army (ER,A) Funding

Prior Funding: \$114,753.0 K

Current Requirements: \$0 K

Future Requirements: \$9,607.0 K

Duration of IRP

Date of IRP Inception: 197607

Estimated Date for Remedy-In-Place (RIP)/Response Complete (RC): 201409/202709

Date of IRP completion including Long Term Management (LTM): 202709

IRP Contamination Assessment

Contamination Assessment Overview

The USAEC, formerly the US Army Toxic and Hazardous Materials Agency (USATHAMA), Environmental Branch, conducted a record search of PTA in July 1976. This report recommended that groundwater (GW) quality data should be collected by PTA at the locations where the groundwater leaves the arsenal.

The US Army Environmental Hygiene Agency (USAEHA) performed a geohydrologic study of PTA in May 1979 and found no gross contamination of existing drinking water wells. The study identified several AOCs and recommended that an additional 19 wells be installed to monitor sites of concern and the arsenal boundary.

The state of New Jersey performed a New Jersey pollutant discharge elimination system (NJPDDES) compliance inspection in July 1980 and found organic solvents being discharged from Buildings 24 and 95 [remedial investigation (RI) Concept No. 21/PICA-120, RI Concept No. 37/PICA-76, and RI Concept No. 22/PICA-10]; Building 24 contained a metal plating operation and Building 95 contained a circuit board etching operation.

In October 1980, USAEC performed a reassessment of PTA and found significant contamination associated with Resource Conservation and Recovery Act (RCRA) Site Building 24 and RCRA Site Building 95. The US Army recommended that a RCRA groundwater assessment be completed. During the period from January 1981 through August 1983, USAEHA conducted a detailed groundwater assessment. The investigation demonstrated that there were several monitoring wells in the vicinity of Buildings 24 and 95 which were highly contaminated with organic solvents, primarily trichloroethylene (TCE). The USAEHA prepared a groundwater quality assessment report documenting the investigation in February 1984. Picatinny Arsenal employed the US Geological Survey (USGS) to perform the additional groundwater investigation.

In February 1989, the NJDEP completed a RCRA facility assessment (RFA). A total of 55 solid waste management units (SWMUs) were identified. Many of these sites were previously identified in other studies.

During a RCRA compliance evaluation inspection (CEI) by the USEPA in 1986 and 1987, at least 30 additional sites were found where waste was handled and/or stored. Many of these sites were previously identified. In June 1988, PTA began fieldwork on a confirmation study. This study included groundwater and/or soil sampling at 35 known or potentially contaminated areas. This study was completed and is considered to be a site inspection (SI) by the regulators.

In April 1988, Argonne National Laboratory (ANL) was tasked to prepare a comprehensive RI concept plan to identify, prioritize and develop a plan of action for each site for the accomplishment of an overall RI. The RI concept plan addressed over 157 sites. The final version of the RI concept plan was published in March 1991 and approved by the USEPA in October 1991.

The investigative approach suggested by the RI concept plan, initiated by the Army and approved by the regulatory agencies in 1990, was to break the defined RI concept plan sites into areas (Areas A - P). These 16 RI concept-defined areas were prioritized and divided into three phases of investigation called phase I, II, and III; however, the investigation of the Burning Ground (PICA 002/RI-Concept Site 34 or Area A) was initiated before the approval and normalization of this approach.

This original approach was modified by the implementation of the DoD relative risk funding policy. The goal of the relative risk policy is to attempt to address the worst sites first from a national or DoD perspective. According to the guidance, the investigations and RAs for sites with the highest relative risk will be funded first with few exceptions.

To determine relative risk for each site, specific steps are required by the guidance. (Each step is applicable, when data exists, for the four different environmental media.) The media include groundwater, soil, sediment, and surface water. The process includes the following steps:

1. Comparing individual chemical results on a site basis to contaminant hazard factors which are supplied by the guidance;
2. Determining whether a migration pathway factor (significant, moderate or minimal) exists based on DoD guidance; and
3. Determining whether a migration pathway factor (evident, potential or confined) exists based on DoD guidance.

The resultant calculation is then designated high ("1"), medium ("2") or low ("3") relative risk. The site will take the highest relative risk score of any one medium. The relative risk score for each site also includes a factor as to whether there exists a regulatory agreement with schedules ("A" designation) or a regulatory agreement does not exist (a "B" designation). All the sites at Picatinny are under such a regulatory agreement with schedules and thus all ratings are designated as "A." Relative risk is not an absolute expression of risk and is not a substitute for a baseline health risk assessment.

IRP Contamination Assessment

Contamination Assessment Overview

The Army Environmental Database - Restoration (AEDB-R), formerly the Defense Site Environmental Restoration Tracking System (DSERTS), presently includes 175 sites for PTA. The numbers are not consecutive and go from PICA-1 through PICA-210. These sites include the original sites listed in the RI concept plan, plus additional sites identified after the RI concept plan was approved.

One hundred and fifty-four of the sites were originally identified by the RI concept plan. Another 21 sites were subsequently added. Those additional 21 sites were identified with AEDB-R numbers higher than PICA 187. The additional 21 sites include 14 sites relating to "Other Buildings" for RI Concept Areas B-P. These sites were identified because of the potential that the contractor, ANL, who developed the RI concept plan, did not assess or review all the available information on all the buildings at the arsenal. However, after an evaluation, some of these "Other Buildings" sites were renamed as area-wide groundwater or specific sites. Additional new AEDB-R sites also included specific locations such as Bear Swamp and Green Pond Brooks (GPB) and the firehouse. The 175 sites are regularly updated in AEDB-R.

At the August 2000, April 2001 and 2002 IAP meetings, it was agreed that sites be considered response complete (RC) based on the following:

- Active range, not Environmental Restoration, Army (ER,A) eligible previously identified in AEDB-R.
- Active range, not ER,A eligible, not previously identified in AEDB-R.
- Previously identified as RC based on fact assumed to be NFA now identified in institutional control (IC) PP.
- Combined with other sites such as PICA-120 now tied to PICA-076 and agreed to at meeting.
- PICA 78 will be considered RC and any action will be incorporated into the other two sites in the Building 31/Building 33 grouping. The RC is being done for administrative purposes.
- Site investigation identified no AOCs as discussed in the 1998 IAP and beyond.
- PICA 63 (Site 20) was combined with PICA 66 (Site 24) for administrative purposes.

In 2003, as a consequence of the agreements made at a series of meeting that occurred, Picatinny RI concept sites were consolidated into PICA sites. The consolidation was agreed to by the regulators and USAEC AEDB-R program managers. The consolidation was based on geographic attributes, similar schedules, and similar remedies. A major portion of the sites are expected to have only ICs as a remedy.

At the May 2005 IAP meeting, an agreement was made to keep open one site - PICA 096 (Site 117) Building 22, Precision Machine Shop for all sites in the 25 sites IC feasibility study (FS), PP and later ROD. Certain sites have been already consolidated and one site [PICA 20 (Site 19)] was reopened to incorporate the costs associated with the 13 site IC ROD sites.

The issue involving the enforceability of land use controls (LUCs) that was noted in the October 2002 IAP was resolved in 2003. The issue was between the USEPA and DoD. Picatinny and USEPA Region II agreed to follow the Navy approach to the LUC issue. Any ROD will only mention and not detail specific LUCs. The details will be specified in the remedial design (RD) phase document.

Although the enforceability of LUCs was resolved in 2003, as noted above, the USEPA and Army still wrestled with the terminology and text regarding acceptable risk and existing LUCs. As of June 2006, the issue was resolved, but had held up planned ROD and PPs for a number of months.

The USEPA is determining in 2010 the status of the promulgated NJ soil cleanup standards as applicable or relevant and appropriate requirements (ARARs) for technical and legal reasons. The delay of this determination has delayed FS work at sites with soil contamination issues.

The USEPA and Army have agreed to text for legal documents when it is in regard to groundwater cleanup, the role of ARARs, and similar subjects. This is generally known as the Mid-Valley Agreements.

The USEPA has determined in writing that that the NJDEP soil cleanup criteria will be considered ARARs except for those which are based on inhalation. This determination was finalized in May 2010 but has held up a number of LUC FSs and PPs. Hence soils were taken out of sites to move forward on the groundwater issues. This included PICA 13 and PICA 08.

Cleanup Exit Strategy

The time to complete the RI process, including the FS and the document review process, can be improved significantly in

IRP Contamination Assessment

meeting our goals. The cleanup exit strategy includes the following array of tools and options:

- Use the PBC to speed the process from draft to final documentation and enhance the negotiating strength of the Army.
- Continue partnering to arrive at approved documentation for actions, mini workplans, use of emails rather than letters and use of the worldwide web as a platform for review.
- Combine sites into documents to reduce the total time lag natural with the process. This may take the shape of including all soil sites into one ROD or all sites with removal action and those with ICs only into separate RODs.
- The Army team has determined that PPs do not require a legal review prior to being submitted to regulators.

IRP Previous Studies

Year	Title	Author	Date
1976	The History of Picatinny Arsenal 1880 - 1931, Vol 1 War Plans Division, Plant Engineering Department, PTA March 31, 1931, Reissued		DEC-1976
1979	Geohydrologic Consultation No. 31-24-0191-79	US Army Environmental Hygiene Agency	JUN-1979
1981	Phase 1, Ground Water Quality Assessment No. 38- 260153-82, Picatinny Arsenal, Dover NJ	US Army Environmental Hygiene Agency	JUL-1981
1982	Darcon Historic Building Inventory HABS/HABER Report (condensed version), Technical Background and Terminology, HAER No. NJ- 36	Picatinny Arsenal	AUG-1982
	Summary of Building History Area H, Area I	Picatinny Arsenal	SEP-1982
	Picatinny Arsenal Preliminary Field Investigation Findings/Recommendations Area H	Picatinny Area	SEP-1982
	HABRS/HAER Inventory Report (full report) DARCOM - Historic Building Inventory HABS/HAER Report	Picatinny Arsenal	SEP-1982
1983	Reassessment of Picatinny Arsenal	Chemical Systems Laboratory	MAY-1983
1984	Final Report, Ground-Water Quality Assessment No. 38-26-0153-84, ARRACDEN Picatinny Arsenal Support Activity, Dover, NJ	US Army Environmental Agency	JAN-1984
1985	Historic Properties Report, Picatinny Arsenal, Dover, New Jersey	Picatinny Arsenal	MAR-1985
1986	Ground Water Quality Data for Picatinny Arsenal, NJ, 1958-85	US Geological Survey	JAN-1986
	Description and Results of Test Drilling Program at Picatinny Arsenal	US Geological Survey	APR-1986
	Determination of Geohydrologic Framework and Extent of Ground-Water Contamination Using Surface Geophysical Techniques at Picatinny Arsenal, NJ; Water Resources Investigation Report 86-4051	US Geological Survey	APR-1986
1988	Resource Conservation and Recovery Act (RCRA Buildings to be Exempted and Closed, Part I, II and III, plus Appendices	Picatinny Arsenal	AUG-1988
1989	Installation Assessment Picatinny Arsenal, Morris County, NJ Volume 1 text, Volume 2 maps	USEPA	MAR-1989
	Cost Estimate Report for Interim Groundwater Remediation at Picatinny Arsenal, Building 24 Study Area, Dover, New Jersey	ERC Environmental and Energy Services, Co., Inc	MAR-1989
	Engineering Feasibility Study for Interim Groundwater Remediation at Picatinny Arsenal Building 24 Study Area Dover, New Jersey	ERC Environmental and Energy Services, Co., Inc	APR-1989

IRP Previous Studies

1989	Title	Author	Date
	Develop Documentation/Prepare Remedial Action Concept Plan for Building 24, Contamination Plume at Picatinny Arsenal	Engineering Technologies Associates, Inc.	APR-1989
	Record of Decision and Environmental Assessment Report for Interim Groundwater Remediation at Picatinny Arsenal, Building 24 Study Area Dover, NJ	ERC, Environmental and Energy Services Co., Inc	MAY-1989
	Record of Decision and Environmental Assessment Report for Interim Groundwater Remediation at Picatinny Arsenal, Building 24 Study Area Dover, NJ	ERC, Environmental and Energy Services Co., Inc	MAY-1989
	Record of Decision for Interim Groundwater Remediation Plan, Picatinny Arsenal, New Jersey	ERC Environmental and Energy Services, Co., Inc	MAY-1989
	Site Investigation of Picatinny Arsenal, Volumes 1 and 2	Dames & Moore	JUL-1989
	Final Report, Well Drilling/Installation and Sampling Analysis, Southwest Boundary Well Clusters, Picatinny Arsenal, NJ	Dames and Moore	JUL-1989
	USATHAMA Public Involvement and Response Plan for Picatinny Arsenal,	Environmental Science and Engineering	SEP-1989
	Data Review, Post Farm landfill, Site 23, Picatinny Arsenal, New Jersey	US Army Toxic and Hazardous Materials Agency (USATHAMA)	SEP-1989
1990	Contamination of Shallow Groundwater in the Area of Building 95, Picatinny Arsenal, NJ, 1985-90, Water Resources Investigation Report No.: 92-4122 U.S. Geological Survey data for study was completed i	USACE	JAN-1990
	Final, Verification of Design Parameters, Picatinny Arsenal, Interim Groundwater Treatment System	Metcalf & Eddy, Inc	JAN-1990
	Final, Waste Management Plan for Interim Remedial Design, Picatinny Arsenal, New Jersey	Metcalf & Eddy, Inc	JAN-1990
	Site Specific Quality Management Plan, Interim Groundwater Remediation Plan, Picatinny Arsenal, NJ	Metcalf & Eddy, Inc	JAN-1990
	Assessment of Contamination of Groundwater and Surface Water in the Area of Building 24, Picatinny Arsenal, NJ 1986-87, Water-Resources Investigations Report 90-4057	US Geological Survey	JAN-1990
	Geophysical Surveys to Locate Buried Drums at Post Farm Site, Picatinny Arsenal	US Geological Survey, Pierre J. Lacombe	JUL-1990
	Environmental Remedial Actions at Picatinny Arsenal	Weston	DEC-1990
	Streamed-Material Characterizations and Surface Water Quality, Green Pond Brook and Tributaries, Picatinny Arsenal, NJ 1983-90, U.S. Geological Survey, Water Resources Investigation Report 95-4246	US Geological Survey	DEC-1990
1991	Air Permit Log No. 01-90-2140 (Permit to Construct, Install or Alter Control Apparatus or Equipment), New Jersey (Revised)	Department of Environmental Protection	JAN-1991
	Sampling and Analysis and Quality Assurance/Quality Control Plan, Interim Groundwater Remediation, Picatinny Arsenal, NJ		FEB-1991
	Remedial Investigation Concept Plan for Picatinny Arsenal Volumes 1 and 2	Argonne National Laboratories	MAR-1991
	Health Risk Assessment Study No. 39-26-L172-91, ARDEC, Picatinny Arsenal, NJ	AEHA	APR-1991

IRP Previous Studies

1991	Title	Author	Date
	Picatinny Arsenal Open Burn Area, Air Toxic Monitoring, 14-15 November 1990	Foster-Wheeler Enviresponse Inc	MAY-1991
	Health Risk Assessment Study No. 39-26-L172-91, ARDEC, Picatinny Arsenal, NJ	AEHA	JUL-1991
	Federal Facility Agreement, Administrative Docket Number: II-CERCLA-FFA-001-04	USEPA and US Army Armament Research Development and Engineering Center	AUG-1991
	Environmental Remedial Actions at Picatinny Arsenal Volumes I, II and III	Weston Services, Inc	OCT-1991
	Removal Site Investigation of Post Farm Landfill, Drum Burial Area at Picatinny Arsenal, Volume 1	Roy F. Weston, Inc	OCT-1991
1992			
	Health Risk Assessment Study No. 39-26-L172-92, ARDEC, Picatinny Arsenal, NJ	AEHA	APR-1992
	Decision Document, Picatinny Arsenal Off-Post Alternate Water Su		SEP-1992
	Removal Site Investigation of Post Farm Landfill, Drum Burial Area at Picatinny Arsenal, Phase II and Phase III Technical Report	Roy F. Weston, Inc	SEP-1992
	Appendix B: U.S.G.S. Well Logs and Downhole Geophysical Logs	Dames and Moore	OCT-1992
	Removal Engineering Evaluation/Cost Analysis (EE/CA) - Final Post Farm Landfill - Site 23 (Drum Burial Area Only) Picatinny Arsenal	Roy F. Weston, Inc	OCT-1992
	Remedial Investigation/ Feasibility Study (RI/FS) of the Burning Ground at Picatinny Arsenal	Dames and Moore	NOV-1992
	Part B, Field Sampling Plan (FSP)	Dames and Moore	NOV-1992
	Part C, Quality Assurance Project Plan	Dames and Moore	NOV-1992
	Environmental Baseline Study for Picatinny Arsenal, Volume II	US Army Armament Munitions & Chemical Command Armament RDE Center	DEC-1992
	Part A, RI/FS Work Plan	Dames and Moore	DEC-1992
	Part D, Health and Safety Plan	Dames and Moore	DEC-1992
1993			
	Validated Sampling Data	Veritech Environmental	JUN-1993
	Removal Action Report, Post Farm Landfill -Drum Burial Area, Picatinny Arsenal, Rockaway Township, New Jersey	Roy F. Weston, Inc	JUN-1993
	Part B, Field Sampling Plan	Dames and Moore	JUL-1993
	Part A, Work Plan	Dames and Moore	JUL-1993
	Phase I Remedial Investigation/Feasibility Study (RI/FS) Picatinny Arsenal, New Jersey	Dames and Moore	AUG-1993
	Part A, Work Plan	Dames and Moore	AUG-1993
	Part C, Quality Assurance Project Plan	Dames and Moore	AUG-1993
	Part D, Health and Safety Plan	Dames and Moore	AUG-1993

IRP Previous Studies

1993	Title	Author	Date
	Phase I Remedial Investigation/Feasibility Study (RI/FS) Picatinny Arsenal, New Jersey	Dames and Moore	AUG-1993
	Part B, Field Sampling Plan	Dames and Moore	AUG-1993
	Part C, Quality Assurance Project Plan	Dames and Moore	AUG-1993
	Part D, Health and Safety Plan	Dames and Moore	AUG-1993
	Environmental Remedial Actions, Building 519, at Picatinny Arsenal, Final Closure Plan	Roy F. Weston	SEP-1993
	Environmental Remedial Actions Post Farm Landfill, Borrow Area at Picatinny Arsenal, Final Work Plan	Roy F. Weston, Inc	OCT-1993
	Non-Time Critical Removal Action Preliminary Assessment for Unexploded Ordnance Area of the DRMO Yard (Site 31),	Roy F. Weston	NOV-1993
1994	RCRA Groundwater Monitoring Plan Building 95 Surface Impoundments	Carpenter Environmental Associates Inc	JAN-1994
	Hydrology of and Water Quality In The Open Burning Area and Vicinity, Picatinny Arsenal, NJ, 1989-90, Water Resources Investigation Report 92-4134	US Geological Survey	JAN-1994
	Environmental Remedial Actions Post Farm Landfill, Borrow Area at Picatinny Arsenal, Preliminary Subsurface Investigation	Roy F. Weston, Inc	FEB-1994
	Water Allocation Permit Equivalency No. 2450E (formerly 2403P), New Jersey	Department of Environmental Protection	FEB-1994
	Non-Time Critical Removal Action Site Investigation Report of the DRMO (RI-Concept Site No. 31	Roy F. Weston	JUL-1994
	NJ Pollutant Discharge Elimination System/Discharge to Groundwater (NJPDES/DGW) Permit Equivalency (PEQ) for Surfactant Injection Study	Jersey Department of Environmental Protection	OCT-1994
	Burning Ground Remedial Investigation Report (RI Concept Plan Site No.34 and Area A), Volumes I and II)	Dames and Moore	DEC-1994
	Picatinny Arsenal, Phase II Remedial Investigation/ Feasibility Study Work Plan, Final Report	USAEC	DEC-1994
	Picatinny Arsenal, Phase II Sampling and Analysis Plan and Quality Assurance Project Plan, Volume 1 and Volume II, Final Report	USAEC	DEC-1994
	Picatinny Arsenal, Phase II RI/FS, Final Health and Safety Plan	USAEC	DEC-1994
	Evaluation of the Effect of Extraction Well Withdrawals on a Trichloroethylene Plume in Ground Water Near Building 24, Picatinny Arsenal	US Geological Surve	DEC-1994
1995	Particle-Tracking Analyses to Determine locations for a New Extraction Well in the Trichloroethylene Plume in Ground Water Near Building 24, Picatinny Arsenal, NJ	US Geological Survey	JAN-1995
	Final Report and Appendices CERCLA Site Clearances, Pistol Range	Carpenter Environmental Assoc	FEB-1995
	RCRA Building 95 Impoundments Groundwater Monitoring Results Sampling of June 25, 1993	Northeastern Analytical Corporation	APR-1995
	Evaluation of the Effect of Extraction Well Withdrawals on a Trichloroethylene Plume in Ground Water Near Building 24, Picatinny Arsenal	U.S. Geological Survey	APR-1995
	Final Report and CERCLA Site Clearances for Building	Carpenter Environmental	JUN-1995

IRP Previous Studies

1995	Title	Author	Date
	537	Associates, Inc	
	Final Report and Appendices for CERCLA Site Clearances for Building 537	Carpenter Environmental Associates, Inc	JUN-1995
	Final Report and Appendix A, Volume I, CERCLA Site Clearances for Building 537	Carpenter Environmental Associates, Inc	JUN-1995
	Picatinny Arsenal, Appendix A, Volume II, CERCLA Site Clearances for Building 537	Carpenter Environmental Associates, Inc.	JUN-1995
	Non-Time Critical Removal Action Site Investigation Report and Engineering Evaluation/Cost Analysis at Building 1363A and 1373, RI Concept Area L, Picatinny Arsenal, New Jersey	Carpenter Environmental Associates, Inc.	JUN-1995
	Final Engineering Evaluation/Cost Analysis Report for Buildings 1363A and 1373	Carpenter Environmental Associates, Inc	JUN-1995
	Appendix A, Volume II, SI (Site Investigation) Report and EE/CA (Engineering Evaluation/Cost Analysis) at Buildings 1363A and 1373	Carpenter Environmental Associates, Inc	JUN-1995
	Appendix B and C, Volume I, SI Report and EE/CA at Buildings 1363A and 1373,	Carpenter Environmental Associates, Inc	JUN-1995
	Appendix C, Volume II and EE/CA at Buildings 1363A and 1373	Carpenter Environmental Associates, Inc	JUN-1995
	Appendix D, Volume II and EE/CA at Buildings 1363A and 1373	Carpenter Environmental Associates, Inc	JUN-1995
	Engineering Evaluation/Cost Analysis for a Non-Time Critical Removal Action for Radium, Strontium and Depleted Uranium Contaminated Soils at Picatinny Arsenal Health Physics Office and the Installation	Army Materiel Command, Rock Island, IL with Allied Technology Group	JUN-1995
	Final Summary Removal Report for Non-Time Critical Removal Actions at Buildings 1363A and 1373, RI Concept Area L, Picatinny Arsenal, NJ	Carpenter Environmental Associates, Inc	SEP-1995
	Quality Assurance Project Plan, Interim Groundwater Treatment System	Dow Environmental Inc.	NOV-1995
1996	Hydrogeology of and Simulation of Ground-Water Flow at Picatinny Arsenal Water Resources Investigation, 96-4061	U.S. Geological Survey	JAN-1996
	Picatinny Arsenal Restoration Advisory Board (PAERAB) Charter	PAERAB	AUG-1996
	Evaluation of Structures Built Prior to 1946 at Picatinny Arsenal	WCH Industries	OCT-1996
1997	Analysis of Ground-Water Flowpaths Near Water Supply Wells, Picatinny Arsenal, NJ	US Geological Survey Water-Resources Investigations Report 96-4228	JAN-1997
	Picatinny Arsenal Area D Groundwater Feasibility Study, Volume 1A - Data Gap Work, Volume 1B Data Gap Workplan	ICF Kaiser Engineers	OCT-1997
	Picatinny Arsenal Area D Groundwater Feasibility Study Data Gap Work Plan, Delivery Order 007, Volume 1B Data gap Workplan Sections 4, 5, 6 and 7	ICF Kaiser Engineers	OCT-1997
	Picatinny Arsenal Area D Groundwater Feasibility Study, Volume 1A Data Gap Work, Volume 1B Data Gap Workplan	ICF Kaiser Engineers	OCT-1997

IRP Previous Studies

1997	Title	Author	Date
	Phase 1 Remedial Investigation Report Volume 6A, Section 15, Conclusions and Recommendations	Dames and Moore	NOV-1997
	Site 23 - Post Farm Landfill Additional Investigation Data Report -Volume 1- DATA and Volume II Appendicies	ICF Kaiser Engineers	NOV-1997
	Relative Risak Site Evaluation No. 38-EH-5690-97, Picatinny Arsenal, NJ	USACHPPM	DEC-1997
	Ecological Field Sampling Work Plan Phase II Remedial Investigation/Feasibility Study, Picatinny Arsenal, New Jersey	ICF Kaiser Engineers	DEC-1997
1998			
	Preliminary Assessment/Site Inspection Report for Non-Evaluated Phase III RI Concept Plan Sites and Additional Sites within RI concept Plan Area L, Volume 1, Sites with Recommendations For No Further	ICF Kaiser Engineers	JAN-1998
	Picatinny Arsenal Facility-Wide Health and Safety Plan, Volumes 1 and 2	ICF Kaiser Engineers	FEB-1998
	Work Plan for Additional RI Investigation at Phase II, Group 1, Sites 40, 93, 156 & 157	ICF Kaiser Engineers	FEB-1998
	Work Plan for Additional RI Investigation at Phase II, Group 3, Sites 1, 2, 4D & 4E	ICF Kaiser Engineers	FEB-1998
	Phase 1, Site 20/24 Data Report and Additional Investigation Work Plan - Picatinny Arsenal, Phase I	ICF Kaiser Engineers	MAR-1998
	Field Inspection of 53 Areas Sensitive for Cultural Resources and Phase IB Archaeological Surveys of Eight Sensitive Areas at Picatinny Arsenal, Morris County, NJ	Panamerican Consultants, Inc	APR-1998
	Community Involvement Response Plan Picatinny Arsenal		APR-1998
	Response to NJ Historic Preservation Office Review of Architectural Assessment of Historic Structures at Picatinny Arsenal, Morris County, NJ and Definition of Historic Districts for Picatinny Arsenal	Panamerican Consultants, Inc	AUG-1998
	Site 23 -Post Farm Landfill Fracture Trace Analysis Report	ICF Kaiser Engineers	AUG-1998
	Picatinny Arsenal Facility-Wide Field Sampling Plan	ICF Kaiser Engineers	SEP-1998
	Workplan Summary Investigation Tables for Phase III 1A Study Sites, Delivery Order 0017	ICF Kaiser Engineers	SEP-1998
	Trenching and Sampling Work Plan Site 180 -Waste Burial Area, Task Order 19	ICF Kaiser Engineers	SEP-1998
	Work Plan for Areas F and G Groundwater Remedial Investigation, Task Order 0017	ICF Kaiser Engineers	DEC-1998
1999			
	Final Remedial Investigation Workplan Buildings 31 and 33 Picatinny Arsenal, New Jersey Contract Number DAAE30-96-D-1026, Delivery Order Three	Environmental Compliance, Inc	FEB-1999
	Phase II Remedial Investigation Report, Round 1, Volume 1	ICF Kaiser Engineers	MAR-1999
	Phase I, Remedial Investigation Report, Volume 14, Appendix D Data Validation Appendix E Physical Properties of Contaminants of Concern	Dames & Moore	APR-1999
	Appendix E Physical Properties of Contaminants of Concern	Dames & Moore	APR-1999

IRP Previous Studies

1999

Title	Author	Date
Phase 1 Remedial Investigation Report, Volume 1, Introduction and Area B	Dames and Moore	APR-1999
Phase 1 Remedial Investigation Report, Volume 7, Ecological Assessment	ICF Kaiser Engineers	APR-1999
Phase 1 Remedial Investigation Report, Volume 1, Introduction and Area B	Dames and Moore	APR-1999
Area B Data Report, Groundwater Feasibility Study Data Gap Investigation, Volume 2, Appendices A-R	ICF Kaiser Engineers	APR-1999
Phase 1 Remedial Investigation Report, Volume 2, Study Area C	ICF Kaiser Engineers	APR-1999
Phase I Remedial Investigation Report Volume 3, Study Area D and E	Dames & Moore	APR-1999
Phase I RI Report, Volume 5, Section 10 Study Area G	Dames & Moore	APR-1999
Phase I RI Report, Volume 6, Sections 11 & 12, Study Area G Green Pond Brook and Fate and Transport	Dames & Moore	APR-1999
Phase II Remedial Investigation Report, Round 1, Volume 2, Area H Sites	ICF Kaiser Engineers	APR-1999
Phase II Remedial Investigation Report, Round 1, Volume 3, Area I, No Further Action Sites	ICF Kaiser Engineers	APR-1999
Phase II Remedial Investigation Report, Round 1, Volume 3 Area I IA Sites Recommended for Additional Investigation	ICF Kaiser Engineers	APR-1999
Phase II Remedial Investigation Report, Round 1, Volume 3, Area I 2A/3A Sites Recommended for Additional Investigation	ICF Kaiser Engineers	APR-1999
Phase II Remedial Investigation Report, Round 1, Volume 4, Area J Sites	ICF Kaiser Engineers	APR-1999
Phase 1 Remedial Investigation Report, Volume 8, Human Health Assessment	Dames & Moore	APR-1999
Public Health Assessment for Picatinny Arsenal (US Army) Dover, Morris County, NJ, CERCLIS NO NJ3210020704	ATSDR	APR-1999
Health Consultation, Review of Picatinny Arsenal PCB Health Risk Assessment Assumptions, Picatinny Arsenal, Dover, Morris County, NJ CERCLIS NO NJ3210020704	ATSDR	APR-1999
Proposed Plan No Response Action with Existing Institutional Controls and Land Use Control Assurance Plan for Sites 19, 22, 28, 44, 49, 86, 1043, 106, 124, 135, 141, 143, 145 163, 182 and 183	ICF Kaiser Engineers	APR-1999
Compilation of Background Information and Existing Institutional Controls for Reference During Regulatory Review Proposed Plan - No Response Action with Existing Institutional Controls and LUCAP for S	ICF Kaiser Engineers	MAY-1999
Picatinny Arsenal Facility-Wide Quality Assurance Project Plan	IT Group	MAY-1999
Area E Groundwater Feasibility Study Data Gap Investigation Workplan	ICF Kaiser Engineers	JUL-1999
Area E Groundwater Feasibility Study Data Gap Investigation Workplan	ICF Kaiser Engineers	JUL-1999
Picatinny Arsenal Task Order 17, Phase I 2A/3A Sites Additional Investigation Work Plan	IT Group	JUL-1999
Phase I Additional RI Sites 22, 44, 61, 104, 122, 135, 141 and 145, Volumes 1 & 2	IT Corporation	SEP-1999

IRP Previous Studies

Year	Title	Author	Date
1999	Picatinny Arsenal Task Order 19, Engineering Evaluation/Cost Analysis (EE/CA) Site 122, PCB Soils at Building 60/60A Area	IT Corporation	SEP-1999
	Area B Data Report/Groundwater Feasibility Study Data Gap Investigation, Volumes 1, Data Report Workplan	IT Group	OCT-1999
	Picatinny Arsenal Facility-Wide Background Investigation Work Plan	IT Corporation	OCT-1999
	Picatinny Arsenal Additional Site Investigations Sites 3, 31, 192, and 199 (Workplan)	IT Corporation	NOV-1999
2000	Picatinny Arsenal Task Order 19 Site 122 PCB Soil and Sediment Removal Action Work Plan	IT Corporation	JAN-2000
	Picatinny Arsenal Task Order 17, Site 34, Proposed Plan	IT Corporation	MAR-2000
	Feasibility Study for Site 20/24 Picatinny Arsenal, NJ	IT Corporation	MAR-2000
	Picatinny Arsenal Task Order 19, Site 16 Guncotton Line Investigation Work Plan	IT Corporation	MAR-2000
	Phase I & II Remedial Investigation Report, Buildings 31 and 33, Picatinny Arsenal, NJ Contract No. DAAE30-96-D-1026, D.O. 3	Environmental Compliance, Inc	APR-2000
	Picatinny Arsenal Task Order 17 Phase III 2A/3A Sites Additional Investigation Workplan	IT Corporation	JUN-2000
	Screening-Level Ecological Risk Assessment Site 54 - Lake Denmark Remedial Investigation/Feasibility Study, Picatinny Arsenal, NJ	IT Corporation	JUL-2000
	Area E Groundwater Feasibility Study	IT Corporation	JUL-2000
	Risk Management Plan for 9 Sites in the Phase I Area, Picatinny Arsenal, NJ	IT Corporation	AUG-2000
	Picatinny Arsenal, Task Order 19, Site 180, Exploratory Trench Investigation Data Report	IT Corporation	OCT-2000
	Picatinny Arsenal Task Order 19, Site 122 (DSERTS #PICA011) PCB Soil & Sediment Removal Action Report	IT Corporation	OCT-2000
	2001	Mid-Valley Groundwater Investigation Work Plan Picatinny Arsenal, NJ	IT Corporation
Picatinny Arsenal RCRA Subpart X Permit Monitoring Summary of Groundwater Sampling Results from February 1999 to October 2000, Task Order 0027		IT Group	JAN-2001
Iron Powder Demonstration Study: REO: Interim Status Report PTA Landfill Morris County, NJ		ARS Technologies Inc	JAN-2001
Picatinny Arsenal Task Order 19, Engineering Evaluation/Cost Analysis - Remedial Action to Treat Tetryl in Soil from the Northern Tetryl Pits at Site 17		IT Corporation	FEB-2001
Picatinny Arsenal Phase III-1A Human Health Risk Assessment Approach		IT Corporation	MAR-2001
Indiana Bat Prey Tissue Sampling Workplan, Picatinny Arsenal New Jersey, Task Order 5		IT Corporation	APR-2001
Picatinny Arsenal Task Order 17, Fish Collection and Human Health Risk Assessment Workplan		IT Corporation	APR-2001
Picatinny Arsenal Green Pond Brook & Bear Swamp Brook Focused Feasibility Study, Task Order 17		IT Corporation	APR-2001

IRP Previous Studies

2001

Title	Author	Date
Institutional Control Proposed Plan For Soils at Sites: 19, 28, 44, 49, 86, 106, 124, 135, 141, 143, 163, 182 and 183 at Picatinny Arsenal	IT Group, Inc.	JUN-2001
Proposed Plan for Site 20/24 Picatinny Arsenal, New Jersey	IT Group Inc.	JUN-2001
Feasibility Study for Site 23, Picatinny Arsenal, NJ	IT Corporation	JUN-2001
Picatinny Arsenal Task Order 17, Area C Groundwater Data Report	IT Corporation	JUN-2001
Area D Groundwater Feasibility Study, Report of Model Re-Calibration and Cost Analysis	IT Corporation	JUN-2001
Picatinny Arsenal Task Order 17, Fish Collection and Human Health Risk Assessment Workplan; also listed under Risk Assessment Reports	IT Corporation	JUL-2001
Picatinny Arsenal Task Order 19, Site 16, Guncotton Line Investigation and Removal Action Report	IT Corporation	JUL-2001
Picatinny Arsenal Task Order 17, Area C Groundwater Data Report	IT Corporation	JUL-2001
Institutional Control Record of Decision for Soils at Sites 19, 28, 44, 49, 86, 106, 124, 135, 141, 143, 163, 182 and 183	IT Corporation	JUL-2001
Picatinny Arsenal Task Order 17, Site 34, Feasibility Study Report	IT Corporation	AUG-2001
Picatinny Arsenal Task Order 19, Site 17, (DSERTS #PICA 001) Northern Tetryl Pits, Explosive Soil Removal and Treatment Action Work Plan	IT Corporation	SEP-2001
Proposed Plan for Site 23, Post Farm Landfill, Picatinny Arsenal, NJ Task Order 17, prepared by IT Corporation, Draft Final	IT Corporation	OCT-2001
Picatinny Arsenal, Delivery Order No.17, Phase II Group 3 Sites Remedial Investigation Report Sites 1, 2 & 4, Volumes 1 - 6	IT Corporation	OCT-2001
Picatinny Arsenal Phase II Sites Surface Water & Sediment Supplemental Human Health Risk Assessment	IT Corporation	NOV-2001
Picatinny Arsenal Phase II Sites Surface Water & Sediment Supplemental Human Health Risk Assessment	IT Corporation	NOV-2001
Picatinny Arsenal Phase II Sites Surface Water & Sediment Supplemental Human Health Risk Assessment (see also in GW documents),	IT Corporation	NOV-2001
Proposed Plan for Green Pond and Bear Swamp Brooks, Picatinny Arsenal, NJ	IT Corporation	DEC-2001

2002

Picatinny Arsenal Task Order 19 Remedial Action Work Plan for the Construction of a Soil Cap at Site 20/24 Pyrotechnic Testing Range	IT Group	FEB-2002
Draft Technical Report, Bench Scale Study for Innovative Technology Demonstration, Picatinny Arsenal/Range Safe	BEM Systems, Inc	MAR-2002
Picatinny Arsenal Task Order 17 Phase III - 1A Sites Remedial Investigation Report Area O - Site 54 Volume 4, Binder 5		APR-2002
Area B Groundwater Feasibility Study, Volume 1 Report, Volume 2 Appendices	IT Corporation	APR-2002

IRP Previous Studies

2002

Title	Author	Date
Picatinny Arsenal Task Order 17, Phase III 1A Sites, Remedial Investigation Report, Area P, Volume 5, Binder 6		APR-2002
Proposed Plan for Area B Groundwater Picatinny Arsenal NJ	Shaw Environmental & Infrastructure, Inc	APR-2002
Picatinny Arsenal Task Order 17 Phase III 1A Sites, Remedial Investigation Report, Area N Site 10 Volume 3, Binder 4		APR-2002
Picatinny Arsenal Task Order 17 Phase III - 1A Sites Remedial Investigation Report General Sections Volume 1, Binder 1		APR-2002
Picatinny Arsenal Facility-Wide Background Investigation	IT Corporation	MAY-2002
Environmental & Infrastructure, Inc. (formerly IT Corporation), May-02.	IT Corporation	MAY-2002
Picatinny Arsenal Task Order 19 Work Plan for the Investigation of Sumps and Dry Wells with Previously Identified COCs at Various Sites	IT Corporation	MAY-2002
Picatinny Arsenal Task Order 17, Fish Consumption Human Health Risk Assessment Report	IT Corporation	MAY-2002
Engineering Evaluation/Cost Analysis (EE/CA) for the Removal and Disposal of the Sediment from the Retention Basins of Bear Swamp Brook, Picatinny Arsenal, NJ	Picatinny Installation Restoration Office	JUN-2002
Picatinny Arsenal Task Order 5, Phase II Group 1 Sites, Remedial Investigation Report Sites 40, 93, 156 & 157 Volumes 1 through 7	IT Corporation	JUN-2002
Trichloroethylene Treatability Study Work Plan	Environmental Restoration	JUL-2002
Additional Site Investigations (Orchard) Sites 3, 31, 192 & 199 Remedial Investigation Report Volume 3, Human Health Risk Assessment Appendix M	IT Corporation	JUL-2002
Revised Work Plan for Lead Isotope Analysis For Area C Groundwater, Picatinny Arsenal, NJ	Shaw Environmental & Infrastructure, Inc	AUG-2002
Proposed Plan for Area D Groundwater Picatinny Arsenal, New Jersey	Shaw Environmental & Infrastructure Inc	AUG-2002
Sampling Work Plan Site 193 Bear Swamp Brook Sediment Retention Ponds Task Order 17	Shaw Environmental & Infrastructure Inc	AUG-2002
Revised Work Plan for Lead Isotope Analysis For Area C Groundwater, Picatinny Arsenal, NJ	Shaw Environmental & Infrastructure, Inc	AUG-2002
Submittal of Response to EPA's Evaluation Evaluations of Picatinny's responses to EPA comments on the Phase III-1A RI Report, Picatinny Arsenal, Oct-02.	Shaw Environmental & Infrastructure Inc	OCT-2002
Sampling Work Plan Site 193 -Bear Swamp Brook Sediment Retention Ponds Task Order 17	IT Corporation	OCT-2002
Picatinny Arsenal Task Order 17 Phase III -1A Sites, Remedial Investigation Report, Area L, Volume 2, Binder 3 (Sites 43, 91, 103, 161, 168 Groundwater Assessment)		OCT-2002
Picatinny Arsenal Task Order 17, Additional Site Investigations Remedial Investigation Report, Sites 3, 31, 192, and 199 Volume I	IT Corporation	NOV-2002
Draft Classification Exception Area (CEA), New Jersey	Department of Environmental Protection	NOV-2002
Picatinny Arsenal Task Order 17 Phase III -1A	IT Corporation	NOV-2002

IRP Previous Studies

2002	Title	Author	Date
	Remedial Investigation Report, Area L, Volume 2, Binder 2 (Sites 5, 6, 18, 35, 167), Oct-02.		
2003	Task Order 17 Southern Boundary Fall 2002 Quarterly Ground Water Monitoring Report	IT Corporation	JAN-2003
	Remedial Investigation Workplan for LNAPL Area at Well 31-6, Building 31, Picatinny Arsenal, NJ Contract No. DAAE30-01-D-1004, D.O.5	Environmental Compliance, Inc.	JAN-2003
	Application for a Stream Encroachment Permit (equivalent) & Statewide General Permit (equivalent) No. 4 for sediment Removal from Bear Swamp Brook Sedimentation Ponds	New Jersey Department of Environmental Protection	JAN-2003
	Transcript of Proceedings, Public Meeting, Hilton Garden Inn, Rockaway, NJ 07885	A.R.T. Agency, Inc.	JAN-2003
	Picatinny Arsenal Task Order 19, Site 16, Guncotton Line Investigation and Removal Action Report	Shaw Environmental, Inc	FEB-2003
	Correspondence and Comments to NJ Department of Environmental Protection: Modification to DEP of Environmental Protection Land Use Regulation Element Permit-Equivalent No. 4 (Hazardous Site Investigation)	Picatinny Arsenal	MAR-2003
	Phase 1 2A/3A Sites Remedial Investigation Report Volume 1	Shaw Environmental, Inc	MAR-2003
	Phase I 2A/3A Sites Remedial Investigation Report Volume 2, Area D Sites	Shaw Environmental, Inc	MAR-2003
	Phase I 2A/3A Sites Remedial Investigation Report, Volume 3, Area F Sites	Shaw Environmental, Inc	MAR-2003
	Phase I 2A/3A Sites Remedial Investigation Report, Volume 3, Area F Sites	Shaw Environmental, Inc	MAR-2003
	Correspondence and Comments to EPA Response top Comments on Site 34 Proposed Plan	Picatinny Arsenal	MAR-2003
	Correspondence and Comments to NJ Department of Environmental Protection: Submittal of the Discharge Monitoring Report (DMR),	Picatinny Arsenal	MAR-2003
	Correspondence and Comments to EPA: Minutes from Final March 4th and 5th Partnering meeting	Picatinny Arsenal	MAR-2003
	Phase II Group 1 and Group 3 Sites, Groundwater summaries, Picatinny Arsenal, NJ, Task Order 17	Shaw Environmental, Inc.,	MAR-2003
	Correspondence and Comments from EPA: Additional Sites Remedial Investigation Report, Sites 3, 31, 192 and 199	US Environmental Protection Agency	MAR-2003
	Feasibility Study for Site 25/26, Delivery Order 0017	US Army Corps of Engineers Baltimore District	MAR-2003
	Correspondence and Comments from EPA: File Correspondence Phase III 1A Sites Remedial Investigation Report,	US Environmental Protection Agency	MAR-2003
	Picatinny Arsenal Task Order 17, Phase I 2A/3A Remedial Investigation Report, Volume 6 - Human Health Risk Assessment (site 60, 142, 185, 187, 209, and 210) Appendix Q	Shaw Environmental, Inc	MAR-2003
	Picatinny Arsenal Task Order 17, Phase I 2A/3A Remedial Investigation , Volume 7 - Human Health Risk Assessment (Site 101, 118, 126, 136, 139, 146) Appendix R	Shaw Environmental, Inc	MAR-2003
	U.S. Environmental Protection Agency	Shaw Environmental, Inc	APR-2003

IRP Previous Studies

2003

Title	Author	Date
Site 193, Bear Swamp Brook, Sediment Removal Action, Delivery Order 17,	Shaw Environmental, Inc	APR-2003
Correspondence and Comments to EPA: Request for a change in the submittal of Interim Groundwater	Picatinny Arsenal	APR-2003
Submittal of Data from Green Pond Brook in front of Site 78,	Picatinny Arsenal	APR-2003
Correspondence and Comments from NJ Department of Environmental Protection: Area D and Area C Reporting Change Request	New Jersey Department of Environmental Protection	APR-2003
Submittal of green cover for 3 reports: 1. Site 16, Report, July 2002: No formal approval letter except IAG schedule - ongoing work in Phase II Additional Investigations. 2) Site 122 Removal Action Request	Picatinny Arsenal	APR-2003
Proposed Plan for Site 23, Post Farm Landfill, Picatinny Arsenal	Shaw Environmental, Inc.	MAY-2003
Submittal of the Final Area D Groundwater Feasibility Study, Delivery Order 17,	Shaw Environmental, Inc.	MAY-2003
Proposed Plan for Green Pond and Bear Swamp Brooks, Picatinny Arsenal, NJ,	Shaw Environmental, Inc	MAY-2003
Correspondence and Comments to EPA: comments on Phase III IA Remedial Investigation (RI) report		MAY-2003
Picatinny Arsenal Task Order 19 Addendum to the Remedial Action Work Plan for the Construction of a Soil Cap at Site 20/24 Pyrotechnic Testing Range	Shaw Environmental, Inc.	JUN-2003
Picatinny Arsenal Task Order 19, Site 122 (DSERTS #PICA011) PCB Soil & Sediment Removal Action Report, Shaw Environmental, Inc., Jun-03.	Shaw Environmental, Inc.	JUN-2003
Lead Engineering Evaluation/Cost Analysis (EE/CA) for Soil Removal at Sites 139, 142, 209 (Building 430), 209 (Former Building 303), 161, and 171 at Picatinny Arsenal	US EPA	JUN-2003
Response to comments Final Fish Consumption Human Health Risk Assessment Report base on June 7th Meeting	Consumption Human Health Risk Assessment Report base on June 7th Meeting, Picatinny	JUN-2003
Transmittal of Proposed Plan for Area D Groundwater, Picatinny Arsenal, NJ	Shaw Environmental & Infrastructure Inc	JUN-2003
NJ Pollutant Discharge Elimination System/Discharge to Groundwater (NJPDES/DGW) Permit Equivalency (PEQ),	New Jersey Department of Environmental Protection	AUG-2003
Picatinny Arsenal Task Order 17 Phase III 2A/3A Sites Remedial Investigation Report, Volume 1, Volume 2 - Area L Sites, Volume 3 - Area M Sites,, Volume 4 - Area P Site	Shaw Environmental, Inc	SEP-2003
Picatinny Arsenal Task Order 17 Phase III - 2A/3A Sites, Remedial Investigation Report, Volume 2 - Area L Sites	Shaw Environmental, Inc.,	SEP-2003
Picatinny Arsenal Task Order 17 Phase III 2A/3A Sites Remedial Investigation Report, Volume 5 - Appendices A-K (Binder 1), Appendix L, Human Health Risk Assessment (Binder 2), Appendices M-O (Binder 3)	Shaw Environmental, Inc.,	SEP-2003
Submittal of Response to EPA Comments on the Phase I 2A/3A Remedial Investigation Report (RI Report),	Picatinny Arsenal	SEP-2003
Final Site 34 Proposed Plan	Shaw Environmental, Inc	SEP-2003

IRP Previous Studies

Year	Title	Author	Date
2003	Mid-Valley Groundwater Investigation Data Gap Work Plan Picatinny Arsenal, NJ,	Shaw Environmental, Inc	SEP-2003
	Picatinny Arsenal Task Order 19 Work Plan for the Investigation of Sumps and Dry Wells with Previously Identified COCs at Various Sites	Shaw Environmental, Inc	SEP-2003
	Proposed Plan for Area E Groundwater, Picatinny Arsenal, NJ.	Shaw Environmental, Inc.,	OCT-2003
2004	Proposed Plan for Site 34	Shaw Environmental, Inc	JAN-2004
	Task Order 17 Southern Boundary Fall 2002 Quarterly Ground Water Monitoring Report	IT Corporation	JAN-2004
	Site 22 Feasibility Study, Picatinny Arsenal, New Jersey. Delivery Order 0017	Shaw Environmental, Inc.	FEB-2004
	Picatinny Arsenal Task Order 19, Lead Site Removal Action Work Plan	Shaw Environmental, Inc.	FEB-2004
	Phase II Group 1 and Group 3 Sites, Groundwater summaries, Picatinny Arsenal, NJ, Task Order 17	Shaw Environmental, Inc.	MAR-2004
	Picatinny Arsenal Area D Groundwater Record of Decision	Shaw Environmental, Inc.	APR-2004
	Picatinny Arsenal Task Order 17, 600 area Groundwater Remedial Investigation Workplan.		APR-2004
	600 Area Groundwater Remedial Investigation, Picatinny, Dover, NJ. (results of Downhole Geophysical Logging Surveys).	Mid-Atlantic Geosciences, LLC	MAY-2004
	Long Term Monitoring Plan and Land Use Control Remedial Design for the Post Farm Landfill, Picatinny Arsenal, NJ	Shaw Environmental, Inc.	JUN-2004
	Group 1 Sites Feasibility Study, Picatinny Arsenal, New Jersey	Shaw Environmental, Inc	JUN-2004
	Record of Decision Site 23 -The Post Farm Landfill, Picatinny Arsenal, NJ	Shaw Environmental, Inc	JUN-2004
	Proposed Plan for Area E Groundwater, Picatinny Arsenal, NJ.	Shaw Environmental Inc	JUL-2004
	Proposed Plan for Site 22, Picatinny New Jersey.	Shaw Environmental, Inc	AUG-2004
	Record of Decision Site 23 - The Post Farm Landfill, Picatinny Arsenal, NJ	Shaw Environmental, Inc	AUG-2004
	Picatinny Arsenal Task Order 17 Phase III & Phase I 2A/3A Sites Ecological Risk Assessment Work Plan.		OCT-2004
	Proposed Plan for Site 25/26 Soil, Picatinny New Jersey.	Shaw Environmental Inc.	NOV-2004
	Proposed Plan for Site 22, Picatinny New Jersey.	Shaw Environmental, Inc.	NOV-2004
	Proposed Plan for Area E Groundwater, Picatinny New Jersey.	Shaw Environmental Inc	NOV-2004
	Land Use Control Record of Decision for Soils at Sites: 19,28,44,49,86,106,124,135,141,143,163,182 and 183.	Shaw Environmental, Inc.	DEC-2004
	Record of Decision Green Pond	Shaw Environmental, Inc.	DEC-2004
Quarterly Checklist to Ensure Integrity of Vegetative Cap, Section 2.2 of the Land Use Control Plan for Site 20/24, Quarterly Inspection #5		DEC-2004	
Site 20/24 Wetland Mitigation Report.	Shaw Environmental, Inc.	DEC-2004	

2005

IRP Previous Studies

2005

Title	Author	Date
Record of Decision Site 34 The Burning Grounds	Shaw Environmental, Inc.	JAN-2005
Picatinny Arsenal Task Order 19, Site 20/24 Pyrotechnic Testing Range Annual Landuse Certification	Shaw Environmental, Inc.	JAN-2005
Picatinny Arsenal Task Order 17 Phase III 2A/3A Sites Remedial Investigation Report, Volume 6 Appendix L, Human Health Risk Assessment.		JAN-2005
Phase 1 2A/3A Sites Remedial Investigation Report Volume 1, Volume 2 - Area D Sites, Volume 3 - Area F Sites, Volume 4 - Area G sites and References, Volume 5 - Appendices, Volume 6 - Human Health	Shaw Environmental, Inc.	JAN-2005
Picatinny Arsenal Task Order 17 Phase III 2A/3A Sites Remedial Investigation Report, Volume 1, Volume 2 - Area L sites, Volume 3 - Area M Sites, Volume 4 - Area P Sites.		FEB-2005
Site 193, Bear Swamp Brook, Sediment Removal Action As-Built reports	Shaw Environmental, Inc.	MAR-2005
Picatinny Arsenal Task Order 17 Phase III & Phase I 2A/3A Sites Screening Level Ecological Risk Assessment		MAR-2005
Picatinny Task Order 17 Site 78, Remedial Investigation Report and Groundwater Pilot Study Work Plan	Shaw Environmental, Inc	MAR-2005
Record of Decision Area E Groundwater and Site 22	Shaw Environmental, Inc.	APR-2005
Proposed Plan for Area B Groundwater Picatinny Arsenal New Jersey	Shaw Environmental & Infrastructure, Inc	APR-2005
Revised Phase I & II Remedial Investigation Report, Buildings 31 and 33 Remedial Investigation Concept Sites 29 & 85/PICA 71, Picatinny Arsenal, New Jersey	Environmental Compliance, Inc	APR-2005
Picatinny Arsenal Task Order 17, Supplemental Investigation of the Apple Trees Recreational Area, Site 192	Shaw Environmental, Inc	APR-2005
Phase III -1A Sites Remedial Investigation Report General Sections Volume 1, Binder 1, Area L; Volume 2, Binder 2 (Sites 5,6,18,35,167) Area N - Site 10; Volume 3, Binder 4 Area O - Site 54; Volume		APR-2005
Area C Groundwater Feasibility Study, Picatinny, NJ	IT Corporation	MAY-2005
Final Feasibility Study for Site 61 and 104, Picatinny, NJ	Shaw Environmental Inc.	JUN-2005
Record of Decision Site 25/26 Soil Draft	Shaw Environmental, Inc	JUN-2005
Feasibility Study for Site(s) 61 and 104, Picatinny Arsenal	Shaw Environmental, Inc.	JUN-2005
Picatinny Arsenal Task Order 19, Report on the Investigation of Sumps and Dry Wells with previously identified COCs at various Sites Volume 1 Section 1 through 7, Figures and appendices A & B, Volume	Shaw Environmental, Inc	JUN-2005
Picatinny Arsenal Task Order 17 Phase III & Phase I 2A/3A Sites Screening Level Ecological Risk Assessment	Shaw Environmental, Inc.	JUN-2005
Correspondence and Comments from New Jersey Department of Environmental Protection: NJDEP Approval of the Record of Decision (ROD) for Site 34-Burning Grounds, Picatinny NJ	New Jersey Department of Environmental Protection	JUL-2005
Area B (Site 20/24) HRC and ORC Groundwater Pilot Study; Picatinny Arsenal New Jersey	Shaw Environmental & Infrastructure, Inc	JUL-2005

IRP Previous Studies

2005

Title	Author	Date
Site 79 Sodium Lactate Groundwater Pilot Study Report, Picatinny, NJ	Shaw Environmental, Inc	JUL-2005
Army Submission of Revised Pages Regarding the Phase II RI Report, Rounds 1 and 2, Volume 1; Phase II RI Report Rounds 1 and 2, Volume 2 Area H; Phase II RI Report, Rounds 1 and 2 Volume 4 Area J, Final 25 Site Feasibility Study	Picatinny Arsenal	AUG-2005
	Shaw Environmental, Inc.	AUG-2005
Response to Comments regarding Area E Groundwater and Site 22 ROD	USEPA	AUG-2005
TITLE: Comments from U.S. Environmental Protection Agency: Comments regarding Record of Decision (ROD) for Site 25/26 Soil (Dated June,	USEPA	AUG-2005
Comments from U.S. Environmental Protection Agency: Approval of changes to Phase III 1A RI Report (Dated April, 2005	US EPA	AUG-2005
Comments from U.S. Environmental Protection Agency: Response to comments for Phase II RI Report, Volume 3-Area I Sites (Dated March 25, 2005).	US EPA	AUG-2005
Comments from U.S. Environmental Protection Agency: Approval of Revisions to Group 3 Feasibility Study (Dated August 2005).	USEPA	AUG-2005
Comments from U.S. Environmental Protection Agency: Area E Groundwater and Site 22 (PICA 077) ROD (Dated April 2005)	USEPA	AUG-2005
Submission of Revised Pages for Phase I & II Remedial Investigation Report, Buildings 31 and 33 Remedial Investigation Concept Sites 29 & 85/PICA 71, Picatinny Arsenal, New Jersey	Environmental Compliance, Inc.	AUG-2005
Site 2 (Phase II/Group 3) Nanoscale ZVI Pilot Groundwater Study Work Plan (Dated July 2004) Picatinny Arsenal, NJ	Shaw Environmental, Inc.	AUG-2005
Draft Site 2 (Phase II/Group 3) Nanoscale ZVI Pilot Study Report (Dated August 2005) Picatinny Arsenal, NJ	Shaw Environmental, Inc.	AUG-2005
Army response to the Letter request to complete investigation related to Area C Groundwater on behalf of Pondview Estates	Picatinny Arsenal	AUG-2005
Draft Final Lead Removal Action Data Report	Shaw Environmental Inc.	SEP-2005
Approval of Decision (ROD) for the Burning Grounds (Cmts from EPA)	USEPA	SEP-2005
Approval of Bldgs 31/33 RI Report	USEPA	SEP-2005
Approval of Group 1 Sites FS (Phase II Sites 40, 93, 156 and 157)	USEPA	SEP-2005
Letter request from Scarinci & Hollenbeck, LLC to review documents in the Picatinny Administrative Record on behalf of Pondview Estates	Scarinci & Hollenbeck, LLC	SEP-2005
Army response to letter request from Scarinci & Hollenbeck, LLC to review documents in the Picatinny Administrative Record on behalf of Pondview Estates	Scarinci & Hollenbeck, LLC	SEP-2005
Army Submission of Page Drops for the Final Area C Groundwater Feasibility Study	Picatinny Arsenal	OCT-2005
Army Electronic Submission of Proposed Supplemental Groundwater Investigation of 600 Area	Picatinny Arsenal	OCT-2005

IRP Previous Studies

2005

Title	Author	Date
Approval of Sites 3, 31, 192 and 199 Remedial Investigation Report (cmts from USEPA)	US EPA	OCT-2005
Approval of Site 78 Remedial Investigation Report (Cmts from EPA)	USEPA	OCT-2005
Army Submission of IAG Meeting Minutes for November 1, 2005	Picatinny Arsenal	NOV-2005
Approval of FS for Sites 31 and 101 (Cmts from USEPA)	US EPA	NOV-2005
Approval of Site Closure Report for Site 20/24 (Cmts from USEPA)	USEPA	NOV-2005
Mid-Valley Groundwater Feasibility Study Picatinny Arsenal, New Jersey	Shaw Environmental, Inc.	NOV-2005
Feasibility Study for Sites 31` and 101	Shaw Environmental, Inc.	NOV-2005
Mid-Valley Groundwater Feasibility Study	Shaw Environmental, Inc.	NOV-2005
Submittal of Comments regarding Proposed Plan for Remediation of Area B Groundwater	Subsurface Solutions, LLC	NOV-2005

2006

Comments Regarding Phase III & Phase I 2A/3A Sites Baseline Ecological Risk Assessment	US EPA	JAN-2006
Response to Comments Regarding Mid-Valley Groundwater Feasibility Study	USEPA	JAN-2006
Request for Meeting to Resolve Language in Picatinny's Decision Document	Picatinny Arsenal	JAN-2006
Submission of Final ESTCP Technology Demonstration Plan	Picatinny Arsenal	JAN-2006
Correspondence and Comments from New Jersey Department of Environmental Protection: Complete Profile Sampling Results From Bureau of Safe Drinking Water, Picatinny NJ	New Jersey Department of Environmental Protection	JAN-2006
Comments from US EPA: EPA approval to Army's Response to Comments Regarding Mid-Valley Groundwater FS	US EPA	MAR-2006
Focused feasibility Study for Buildings 31 and 33 Remedial Investigation Concept Sites 29 & 85/PICA 71	Environmental Compliance, Inc.	MAR-2006
Comments from USEPA: EPA's Comments EBS and Finding of Suitability to Lease Report for Bldgs 350, 352, 353, 354	US EPA	MAR-2006
Picatinny Task Order 17: Phase III and Phase I 2A/3A Sites Baseline Ecological Risk Assessment	Shaw Environmental, Inc.	MAR-2006
216468- Morris County Municipal Utilities Authority Rockaway Basin Well Drilling and Testing-Contract No. 32B	Hatch Mott MacDonald	MAR-2006
Remedial Design for Record of Decision for Green Pond Brook/Bear Swamp Brook (PICA-192)	Shaw Environmental, Inc.	APR-2006
Bear Swamp Brook Oil/Water Separator and Tributary Stream Sediment Removal Action Work Plan	Shaw Environmental, Inc.	APR-2006
Phase II Remedial Investigation Report, Rounds 1, and 2, Area I Volume 3 500 Sites; 900 and 3000 Area Sites; Area I Remaining Sites; and Area I Specific Appendices	Shaw Environmental, Inc.	MAY-2006
Record of Decision for Soil at Site 25, Sanitary Landfill, and Site 26, Dredge Disposal Pile	Shaw Environmental, Inc.	JUL-2006
Proposed Plan for Site 180	Shaw Environmental Inc.	JUL-2006

IRP Previous Studies

2006

Title	Author	Date
Characterization Survey and Additional Sampling Plan for the Former Dog Pound Site	Shaw Environmental, Inc.	AUG-2006
Action Memorandum, Munitions and Explosives of Concern Time Critical Removal Action for Tilcon Quarry, Picatinny, New Jersey	Picatinny Environmental Affairs Office	SEP-2006
Performance Based Contract Facility-Wide Field Sampling Plan	ARCADIS, Inc.	SEP-2006
Historical Records Review, Picatinny Arsenal, New Jersey: Stakeholder Draft	Malcolm Pirnie, Inc.	SEP-2006
Third Five-Year Review Report	Shaw Environmental, Inc.	OCT-2006
Performance Based Contract Quality Assurance Project Plan	ARCADIS, Inc.	OCT-2006
Groundwater Sampling and Temporary Well Installation, Picatinny Arsenal, Area D Golf Course	CPT Testing	NOV-2006
Draft Remedial Action Workplan, PICA 067 (Sites 25 and 26)	ARCADIS, Inc.	DEC-2006

2007

Record of Decision For Site 25/26 Soil	Picatinny Arsenal	JAN-2007
Draft Final Record of Decision, PICA 205, Area B Groundwater	ARCADIS, Inc.	JAN-2007
Final Proposed Plan for Site 180 (PICA 093), Waste Burial Area	ARCADIS, Inc.	FEB-2007
Draft Final Remedial Action Workplan, Sites 25/26 (PICA 067), Sanitary Landfill and Dredge Pile	ARCADIS, Inc.	FEB-2007
Final Time Critical Removal Action Work Plan, Mount Hope Quarry, Morris County, New Jersey	Malcolm Pirnie, Inc.	FEB-2007
Site Inspection Work Plan, Picatinny Arsenal, New Jersey	Malcolm Pirnie, Inc.	FEB-2007
Draft Remedial Design, PICA 205, Area B Groundwater	ARCADIS, Inc.	MAR-2007
Final Remedial Design, Area D	ARCADIS, Inc.	MAR-2007
Task Order 17- Bear Swamp Brook Oil/Water Separator and Tributary Stream Sediment Removal Action Work Plan	Shaw Environmental, Inc.	MAR-2007
Draft Final Remedial Action Work Plan, Site 180 (PICA 093) Waste Burial Area	ARCADIS, Inc.	JUN-2007
2nd Half 2006 and 1st Half 2007 Semi-Annual Groundwater / Surface Water Monitoring, Area D/Building 24 RCRA Units	ARCADIS, Inc.	JUN-2007
February 2007 Area E Groundwater Monitoring Data	ARCADIS, Inc.	JUN-2007
Record of Decision For PICA 020 Group of Sites	ARCADIS, Inc.	JUL-2007
Final Remedial Action Work Plan, Site 25/26 (PICA 067), Sanitary Landfill and Dredge Pile	ARCADIS, Inc.	JUL-2007
Draft Final Remedial Action Work Plan, PICA 020 Group of Sites	ARCADIS, Inc.	AUG-2007
Draft Final Land Use Control Plan, Remedial Design Addendum 01, Area D (PICA-76)	ARCADIS, Inc.	AUG-2007
Draft Remedial Design Area E (PICA-77) & Site 22 (PICA-010)	ARCADIS, Inc.	AUG-2007
1st and 2nd Quarter 2007 Groundwater Monitoring One-time Surface Soil Sampling Report	ARCADIS, Inc.	AUG-2007

IRP Previous Studies

2007

Title	Author	Date
Final Quality Assurance Project Plan	ARCADIS, Inc.	AUG-2007
Vapor Intrusion Investigation Report for the Child Development Center	ARCADIS, Inc.	AUG-2007
Record of Decision for Area E Groundwater and Site 22 (Building 95 Impoundment Area)	ARCADIS, Inc.	SEP-2007
Record of Decision, Site 180 (PICA 093) Waste Burial Area	ARCADIS, Inc.	SEP-2007
Proposed Plan for Area C Groundwater	Shaw Environmental, Inc.	SEP-2007
Remedial Action Report, Site 23 (PICA 065) The Post Farm Landfill	ARCADIS, Inc.	SEP-2007
Final Proposed Plan, Sites 31 and 101 (PICA 072), Former DRMO Yard and Former Gas Station	ARCADIS, Inc.	SEP-2007
Draft Final Time Critical Removal Action Report, Mount Hope Quarry, Morris County, New Jersey	Malcolm Pirnie, Inc.	SEP-2007
Remedial Action Report, Site 180 (PICA 093) Waste Burial Area	ARCADIS, Inc.	OCT-2007
Picatinny Arsenal Army Defense Environmental Restoration Program Installation Action Plan FY 2007	Picatinny Arsenal	OCT-2007
Picatinny Arsenal Compliance-Related Cleanup Installation Action Plan FY 2007	Picatinny Arsenal	OCT-2007
Final Feasibility Study, Mid-Valley Groundwater	ARCADIS, Inc.	NOV-2007
Stakeholder Draft, Site Inspection Report, Picatinny Arsenal, New Jersey	Malcolm Pirnie, Inc.	NOV-2007
Site Inspection Report Picatinny Arsenal Relating to the MMRP	Malcolm Pirnie, Inc.	NOV-2007
Feasibility Study for Sites 109, 125, 142, 144, 146 & PICA-203	Shaw Environmental Inc.	DEC-2007
Engineering Evaluation / Cost Analysis Investigative Work Plan Residential Community Initiative Military Housing Project Area (Part of PICA-003-R-01)	PIKA- MP JV, LLC	DEC-2007
Draft Final Time Critical Removal Action Report, Mount Hope Quarry, Morris County, New Jersey	Malcolm Pirnie, Inc.	DEC-2007

2008

Picatinny Arsenal Sampling Summary Report Former Dog Pound Site	Shaw Environmental, Inc.	JAN-2008
Picatinny Arsenal Classification Exception Area Biennial Certification	Shaw Environmental, Inc.	JAN-2008
Draft Final Interim Remedial Action Report, Area E Groundwater	ARCADIS, Inc.	FEB-2008
Draft Final Feasibility Study, Area P Site 78 (PICA 013)	ARCADIS, Inc.	FEB-2008
Child Development Indoor Air Sampling Report	ARCADIS	MAR-2008
Remedial Action Report, Site 25/26 (PICA 067), Sanitary Landfill and Dredge Pile	ARCADIS, Inc.	MAR-2008
Draft Final Proposed Plan, Sites 61 and 104 (PICA 102)	ARCADIS, Inc.	MAR-2008
Record of Decision For Site 31/101 (PICA 72) Soil	ARCADIS, Inc.	MAR-2008
2007 Annual Land Use Certification	ARCADIS, Inc.	MAR-2008
RDX Report for 600 Hill	Shaw	APR-2008
Remedial design for Area B Groundwater	ARCADIS	NOV-2008

IRP Previous Studies

2009

Title	Author	Date
Draft Technical Memorandum for Group 3 Sites	ARCADIS	MAR-2009
Draft Technical Memorandum for Group 1 Sites	ARCADIS	APR-2009
"Final" Midvalley Groundwater Feasibility Study	ARCADIS	MAY-2009
Feasibility Study for Site 78 (PICA 13)	ARCADIS	MAY-2009
Remedial Design for LTM for Area C	Shaw Environmental	MAY-2009
Site 25/26 Remedial Action Report	ARCADIS	JUN-2009
Site 180 Remedial Action Report	ARCADIS	JUN-2009
PICA 20 (2007 LUC Group) Remedial Action Report	ARCADIS	JUN-2009
Site 61 and 104 (PICA 102) Remedial Action Report	ARCADIS	JUN-2009
Feasibility Study for PICA 1 LUC Group (PICA 1, 6, 22, 85, 143, 145, 163, 171, 192, and 199) (Arcadis 25 Site FS)	ARCADIS	SEP-2009
The 5 Site FS (PICA 11, 85, 91, 97, and 108)	ARCADIS	SEP-2009
Wetland Mitigation Plan for PICA 072	ARCADIS	SEP-2009
Proposed Plan for PICA 13 (Site 78)	ARCADIS	OCT-2009
Skeet Range Workplan	Shaw Environmental	DEC-2009
45 Site FS (PICA 11, 50, 75, 91, 97, 108, 122, 134, 135, 136, 162, 175, 200, 209)	ARCADIS	DEC-2009
Lake FS (PICA 15, 57, 195)	ARCADIS	DEC-2009
Non Lakes Feasibility Study (which includes TECUP Buildings))	ARCADIS	DEC-2009

2010

Proposed Plan for the PICA 1 LUC Group (Arcadis 25 Site FS)	ARCADIS	JAN-2010
Draft Group 1 Record of Decision	ARCADIS	JAN-2010
Draft Proposed Plan for 600 Area	Shaw Environmental	FEB-2010
Area B Annual Report	ARCADIS	FEB-2010
Area E Annual Report 2009	ARCADIS	FEB-2010
Remedial Design for PICA 008 (Group 3)	ARCADIS	APR-2010
Decommissioning Workplan for Pump and Treat Facility for Area D	ARCADIS	APR-2010
Proposed Plan for PICA-111	Shaw Environmental	JUN-2010
GPB/BSB (PICA 193) 2009 Annual Report	ARCADIS	JUN-2010
Area C Semiannual Groundwater Data Report, Winter 2010.	Shaw	JUN-2010
Revised CEA Biannual Report	ARCADIS	JUN-2010
Signed Group 3 Record of Decision	Army with ARCADIS	JUL-2010
ROD for PICA 13 or Site 78	ARCADIS	JUL-2010


IRP Previous Studies

2010

Title	Author	Date
Annual LUC Certification Report	ARCADIS	JUL-2010
Site 31/101 (PICA 72) Remedial Action Report	ARCADIS	AUG-2010
Area C Groundwater Interim Remedial Action Report	Shaw	AUG-2010

IRP Installation Map(s)

IRP Installation Map

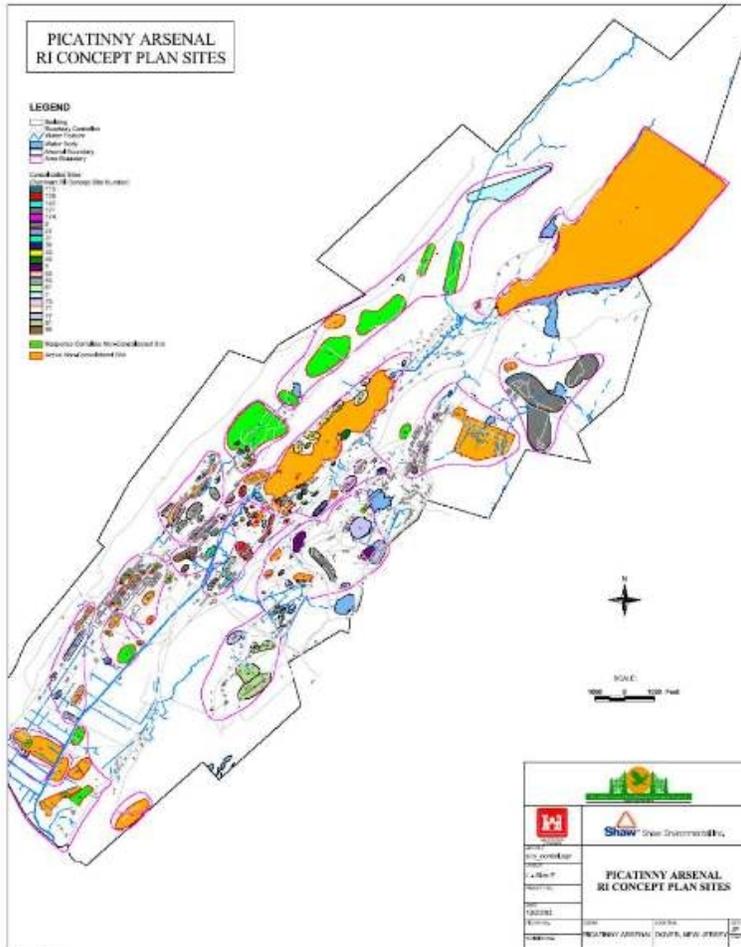

PICATINNY ARSENAL

Installation Restoration Program

Site Descriptions

STATUS

Regulatory Driver: CERCLA
RRSE: LOW

Phases	Start	End
PA.....	200009.....	200109
RA(C).....	200604.....	200909
RA(O).....	200705.....	201509
RIP Date:	200909	
RC Date:	201509	

SITE DESCRIPTION

This site was created to address funding information for the PBC for PTA.

The PBC site represents all the cost associated with all active Installation Restoration Program (IRP) sites at PTA through FY15 (when the PBC expires) except PICA-206, PICA-111, and PICA-58 and does not include RA costs associated with PICA-15, PICA-57, PICA-145, PICA-155, PICA-184, and PICA-195. The scope of the current PBC only includes actions through final ROD associated with these sites.

CLEANUP/EXIT STRATEGY

Please see the individual site descriptions for cleanup strategies.

Site Name: INACTIVE TETRYL WASTE PITS (SITES 17/18)

STATUS

Regulatory Driver: CERCLA

RRSE: HIGH

Contaminants of Concern: Explosives, Metals, Polycyclic Aromatic Hydrocarbons (PAH), Volatiles (VOC)

Media of Concern: Sediment, Soil

Phases	Start	End
PA.....	197607.....	198105
SI.....	198707.....	198906
RI/FS.....	199606.....	201209
RD.....	200604.....	201209
IRA.....	200010.....	200503
RA(C).....	200604.....	201209
RA(O).....	200604.....	202109
RIP Date:	201209	
RC Date:	202109	

SITE DESCRIPTION

The Northern Tetryl Pits (Site PICA-017) formerly consisted of four unlined, bermed pits, located at the intersection of 18th Avenue and 13th Street. The two upper northern 2,4,6-trinitrophenylmethyl nitramine (tetryl) pits were located on the north side of 18th Avenue, and the two lower northern tetryl pits were located on the south side of 18th Avenue. Each pit was about 10 feet in diameter, with depths ranging from one to five feet. The pits are believed to have been used from at least 1932 (when the pits were first indicated on engineering drawings) until 1945, for disposal of waste resulting from the processing of tetryl in the nearby 1000 buildings. The Southern Tetryl Pit (Site PICA-018) received waste from Building 1052, a nitrating building, and may have operated from 1938 to 1945. The northern and southern tetryl pits are currently inactive. Materials that may have been associated with the tetryl pits included: tetryl, acid (possibly nitric acid), and water. Lead may also have been associated with the manufacturing of tetryl, although it is not a constituent of the final product.

Surface soil samples were collected as part of a preliminary assessment (PA)/SI conducted in 1996, and soil, sediment, and groundwater samples were collected during RI activities conducted from 1998 to 2000. Soil analysis indicated the presence of explosives (tetryl), metals (lead), and polycyclic aromatic hydrocarbons (PAHs) in excess of levels of concern (LOCs). Sediment in the on-site ditch, at the northern tetryl pit, contains PAHs above LOCs.

An EE/CA for the removal of soil co-contaminated with explosives and lead was completed in 2001. Soil contaminated with explosives [about 300 cubic yards (cy)] was treated in a bioreactor to address explosives. A rotted catch basin and 25 cy of soil were removed at the southern tetryl pits as part of a facility-wide sump and catch basin investigation in 2004.

Groundwater contains volatile organic compounds (VOCs) (TCE) above LOCs at both the northern and southern tetryl pits, as well as metals (lead) and explosives [cyclotrimethylenetrinitramine (RDX)] at the northern tetryl pits.

An RI was submitted in 2003 which included the results of the tetryl removal action. Human health risk assessment (HHRA) results indicate the non-cancer hazard index (HI) is less than one for target populations and estimated total cancer risks are 1E-4 for industrial research worker and within target risk range of 1E-4 to 1E-6 for the on-site youth visitor scenario. A baseline ecological risk assessment (BERA) was conducted in 2005. It determined that although the food web models indicated that adverse effects on reproduction in small mammals or birds could occur given sufficient exposure to site contaminants of potential ecological concern (COPECs) in northeastern Area L, the field investigations and rodent sperm analysis (RSA) results indicated that effects, if any, were not impacting the local populations of small mammals or birds.

A fuel storage tank (FST) with PICA 01 was approved by the USEPA in August 2009. The PP was submitted in January 2010.

CLEANUP/EXIT STRATEGY

Site ID: PICA-001

Site Name: INACTIVE TETRYL WASTE PITS (SITES 17/18)

At RI Concept Site 17, LUCs are expected. A PP was submitted to the USEPA in January 2010.

The site is included in the site-wide PBC.

Consistent with the IRP cleanup strategy, an FS has been completed that includes PICA 001, PICA 006, PICA 022, PICA 085, PICA 143, PICA 163, PICA 171, PICA 192, and PICA 199. Cleanup strategies for these sites are presented within their respective descriptions.

Groundwater contamination is being addressed on an area-wide basis as part of the Mid-Valley groundwater investigation currently in the RI/FS stage. Details of the Mid-Valley groundwater investigation are supported in PICA-204 and funding is supported under the PBC.

PICA-001 Maps and Photos

PICA-001

INACTIVE TETRYL WASTE PITS (SITES 17/18)



Site Name: LOWER BURNING GROUND (SITE 34)

STATUS

Regulatory Driver: CERCLA

RRSE: HIGH

Contaminants of Concern: Dioxins/Dibenzofurans, Metals, Pesticides, Polychlorinated Biphenyls (PCB), Semi-volatiles (SVOC)

Media of Concern: Groundwater, Sediment, Soil, Surface Water

Phases	Start	End
PA.....	197607.....	198105
SI.....	198707.....	198906
RI/FS.....	199011.....	200508
RD.....	200604.....	201409
RA(C).....	200604.....	201409
RA(O).....	200604.....	202709
RIP Date:	201409	
RC Date:	202709	

SITE DESCRIPTION

The Lower Burning Ground encompasses an area of approximately seven acres. Site 34 is broken into four areas: the landfill area, the waste pile area, the open burning area, and the burn pan area. The landfilled area sustained landfill operations from 1960 to 1980 to fill in low-lying ground. Direct burning of explosives-contaminated wastes on the ground surface was conducted in the open burning area until the practice was discontinued in 1985. From 1985 to present, explosives-contaminated wastes have been burned in nine burning pans located in the burn pan area.

In the 1980s a geophysical survey was conducted and groundwater wells were installed. A SI was completed in 1989 that included collection of surface soil, groundwater, surface water/sediment samples and analysis for VOCs, base neutral acids (BNAs), cyanide, and total phenols. Metals and PAHs were detected above LOCs in soil and sediment. In 1990, USAEHA soil sampling found dioxins. In a 1990 groundwater assessment, wells and minipiezometers were installed and sampled for VOCs, BNAs, pesticides dioxins/furans, and polychlorinated biphenyls (PCBs). VOCs and metals were detected above LOCs and the HHRA found risk was above 5×10^{-4} . A contamination assessment in 1991 included surface soil sampling for VOCs, BNAs, total petroleum hydrocarbons (TPHs), PCBs, and PP metals. The 1993 RI included sampling soil, surface water, sediment, and groundwater for VOCs, metals, BNAs, dioxins/furans, PCBs, and pesticides. In the soil there were exceedances of BNAs, metals, PCBs, and detections of explosives and dioxins/furans. There were exceedances of metals and VOCs in surface water and metals, pesticides, and cyanide in sediment. Metals were detected in above LOC in groundwater. The 1993 HHRA indicated that risk was above 1×10^{-4} from metals, PAHs, PCBs, and dioxins. The ecological risk assessment (ERA) determined that there was elevated risk from metals, pesticides, PCBs, and dioxins. A limited groundwater sampling event in 1999 indicated that sampling via low-flow techniques returned exceedances of published standards for only two metals (arsenic and lead). Unexploded ordnance (UXO) has been found in close proximity to the site.

An FS was prepared which recommends capping the entire site. The FS evaluated capping, soil fixation, soil treatment, excavation, and disposal in a number of different combinations. The regulatory agencies have indicated that capping with an impermeable cap would be an acceptable alternative. This FS was approved in fall 2001. Surface soil sampling, in order to complete the contamination delineation, was initiated in August 2002. These results will be used to finalize the design of the cap. A public meeting for the site was completed on Feb. 19, 2004. The ROD was signed by the Picatinny Garrison Commander and the USEPA.

The ROD includes provisions that allowed the delay of the implementation of the cleanup (closure) until the incinerator is operational that would replay the burning. At this point in 2010, the incinerator operations will be initiated by September but will not be fully functional which would allow closure for a year after startup with new burning grounds.

In 2009 and 2010, the additional well was installed that was a condition of the approval of the FS. In addition, all wells were sampled.

Site ID: PICA-002

Site Name: LOWER BURNING GROUND (SITE 34)

CLEANUP/EXIT STRATEGY

The site can not be closed until the incinerator and new burning grounds are operational. This is expected in late calendar year 2010.

The closure which must be consistent with RCRA including a capping system followed by cap maintenance and LTM. The final cap dimensions will be determined in the RD. The cap will be extended to cover the burning ground contamination extending into Site 180. The wells were sampled in 2010 based on the lag between implementation and ROD signature.

This site is included in the PBC.

The RD will be performed this year although the schedule for operation of the incinerator and the permit for the new burning grounds at the arsenal are only fairly certain. These must happen before the current site is closed.

STATUS

Regulatory Driver: CERCLA
 RRSE: HIGH
 Contaminants of Concern: Explosives, Metals
 Media of Concern: Sediment, Soil

Phases	Start	End
PA.....	197607.....	198105
SI.....	198707.....	198906
RI/FS.....	199502.....	201209
RA(C).....	200604.....	201209
LTM.....	201209.....	202109
RIP Date:	N/A	
RC Date:	201209	

SITE DESCRIPTION

The Guncotton Line (GCL) is located near the southern end of Picatinny Lake, and is believed to be either an abandoned sanitary sewer line or a storm drain that inadvertently received nitrocellulose (NC), referred to as guncotton. The pipeline was formerly used to discharge liquid waste from a trinitrotoluene (TNT) facility, in Building 520, into Picatinny Lake, southwest of the PTA power plant, Building 506. The line includes a portion of open trench, which collects surface runoff and a buried pipeline. Reportedly, the pipeline was about 2,500 feet long and ran from an underground catch basin near Building 554, past Building 506, under the location of a former coal pile, and ended in the vicinity of Building 424-E.

During the phase II RI, a geophysical survey was conducted to identify the underground portion of the line. A long linear anomaly was identified northwest of Building 514; however, whether the anomalous area represents the GCL or another utility line was unclear. In addition, soil samples were collected from the open trench portion of the line. Explosives and metals have been detected in the soil from the open trench at concentrations in excess of LOCs. Bioassays conducted on soil from the open trench did detect explosives, pesticides, and metals in the test organisms but the levels of these chemicals did not result in increased toxicity to the earthworms. The undefined portion of the line, under the former coal pile, near Building 506, was identified in spring 2000 through the use of video cameras, smoke testing and test pitting. Approximately 270 linear feet of a 12-inch pipeline, and 200 linear feet of an eight-inch pipeline, were excavated and removed with NC-contaminated soil, in order that a sanitary sewer line could safely be installed through the affected area.

Additional sampling performed in 2001 delineated the horizontal and vertical extent of contamination in the open trench. The risk from sediment and subsurface soil exposures are within the USEPA target risk range of 1X10(-4) to 1X10(-6). The non-cancer hazard from exposure to subsurface soil is below the USEPA target threshold of one, while the hazard from sediment exposure exceeds one. For the on-site youth visitor, this exposure pathway is not reasonably anticipated as the majority of the GCL is within an enclosure.

The lead concentrations identified in the sediment are not considered a health concern. Metals and explosives contamination is present along the entire length of the open trench and drainage ditch (2,200 feet). Additional ecological investigations of the open trench planned for the spring of 2005 found the trench to be completely dry. Alterations to its origin due to remediation and/or construction have rendered the trench unsuitable as a significant aquatic habitat or significant transport pathway.

An FS was approved by the USEPA for the site in August 2009. The PP was submitted in January 2010 to the regulators.

A facility (the BRAC facility called PHST) is being built directly on a segment of the open part of the GCL in the 400 Building Area of Picatinny. The Army has proposed and the NJDEP and the USEPA have agreed that the soils from underneath the footprint will be placed under an asphalt cover. The information would then be put in the ROD, the RD, and in the geographic information system (GIS).

Site ID: PICA-006

Site Name: GUNCOTTON LINE (SITE 16)

CLEANUP/EXIT STRATEGY

An FS was submitted and approved by the regulators. The PP which included PICA 01 and PICA 06 was submitted in January 2010. The ROD will be completed. LUCs are recommended as a remedy for this site although a limited soil removal of dinitrotoluene (DNT) is expected based on New Jersey comments.

The USEPA and the NJDEP have agreed that the soils that have been excavated because of the construction of a building on the footprint on a large portion of the GCL can be placed underneath the parking lot of the project which is considered an engineering control.

The site is included in the site-wide PBC.

Site Name: INACT. ROCKET FUEL TEST Areas

STATUS

Regulatory Driver: CERCLA

RRSE: MEDIUM

Contaminants of Concern: Metals, Semi-volatiles (SVOC), Volatiles (VOC)

Media of Concern: Groundwater, Sediment, Soil, Surface Water

Phases	Start	End
PA.....	197607.....	198105
SI.....	198707.....	198906
RI/FS.....	199502.....	201008
RD.....	200604.....	201009
RA(C).....	200604.....	201009
RA(O).....	200604.....	202709

RIP Date: 201009

RC Date: 202709

SITE DESCRIPTION

PICA Sites 7 (RI site 1) and 157 (RI site 4) have consolidated into PICA Site 8 (RI site 2). These sites are now known as Group 3. PICA Site 8 now represents funding associated with former sites 7 and 157.

This 31-acre site includes Rocket Test Areas A, B, and C, that were leased to the Naval Air Rockets Test Station (NARTS) division of the Navy. The Navy entered into a sublease agreement with the Reaction Motors Division (RMD) of Thiokol Chemical Co. in 1947. Activities at this site discontinued in 1962. The sublease with RMD expired in 1968. RMD tested and evaluated rocket engines and their related components at the site. Other operations known to have occurred in these test areas include new and alternative rocket fuel development and engine redesign. The majority of the buildings have been decontaminated and demolished, and Test Areas B and C remain inactive and unimproved.

As part of the phase II RI conducted in 1996, the following activities were performed: a geophysical survey, a soil-gas survey, installation of monitoring wells, excavation and sampling of test pits, and collection of soil, groundwater, surface water, and sediment samples. VOC groundwater contamination has been identified in the two aquifers beneath the site. The extent of the groundwater contamination in the shallow aquifer was defined during the group 3 RI completed in 1998. The HHRA indicates that the risk and hazard to impacted site media are below the target risk level of 1X10⁽⁻⁴⁾, but above the target hazard level of one. The primary pathway contributing to risk and hazard was dermal contact with groundwater. The primary chemical driving the cancer risk and non-cancer hazard was carbon tetrachloride. The shallow groundwater discharges to several ecologically sensitive ponds, brooks, and associated wetlands at the site. Surface water and sediment results have indicated levels of VOCs, ammonia, and metals above LOCs in these surface water bodies. Additional groundwater investigation and monitored natural attenuation (MNA) evaluation was completed in 2002, to fill specific data gaps to effectively evaluate remedial alternatives for the surface and groundwater contamination.

The FS addresses all media at RI Sites 1, 2, and 4. At RI Site 2, carbon tetrachloride, tetrachloroethylene (PCE), and corresponding breakdown products were COCs in the groundwater. In surface water ammonia and metals were identified as COCs. In sediment several metals were identified as COCs. In surface soil, AOCs were developed for lead [4,410 milligrams per kilogram (mg/kg)] and zinc (1,550 mg/kg). Additional surface soil sampling was completed for the former location of Buildings 3513 and 3517 to investigate PCB-contaminated surface soil. After compliance averaging, it was determined that no RA was needed for the PCBs in this area. A pilot study, to test zero-valence iron, was completed in FY05 and a report was submitted to the regulators.

In 2003, PICA-007 and 157 were listed as RC in AEDB-R and will be addressed as part of PICA-008. As of summer 2006, Site 2 is being used as a homeland defense training center.

The PP was public noticed in October 2009. The ROD was submitted to the regulatory agencies in February 2009.

Site ID: PICA-008

Site Name: INACT. ROCKET FUEL TEST Areas

CLEANUP/EXIT STRATEGY

The draft PP has been submitted to the regulators in June 2008. The PP will need to be approved by the regulators before public notice is issued. The ROD should be signed by the end of the 2010.

Groundwater contaminated with VOCs will be treated via injection of emulsified vegetable oil or other substrates to be determined in the RD. MNA will be used after treatment. After remediation is complete, LUCs will be necessary to preclude residential land use. Soil and sediment are not addressed in the PP and will be addressed in another ROD (the 45 site FS). Surface water will be addressed by the first ROD.

PICA-008 Maps and Photos

PICA-008

INACT. ROCKET FUEL TEST Areas



Site Name: BLDG 60 SATELITE WSTE ACCOM AREA(SITE122)

STATUS

Regulatory Driver: CERCLA

RRSE: MEDIUM

Contaminants of Concern: Metals, Pesticides, Polychlorinated Biphenyls (PCB), Semi-volatiles (SVOC)

Media of Concern: Groundwater, Sediment, Soil

Phases	Start	End
PA.....	198707.....	198906
SI.....	198910.....	199103
RI/FS.....	199309.....	201209
RD.....	200604.....	201209
IRA.....	199906.....	200008
RA(C).....	200604.....	201209
LTM.....	201209.....	202109

RIP Date: N/A

RC Date: 201209

SITE DESCRIPTION

In 1942 Building 60 was constructed adjacent to Bear Swamp Brook (BSB) as an environmental testing laboratory. Various types of testing conducted in the building include: ballistic air gun launch testing, drop testing, solar radiation testing, mechanical stress, shock, vibration, and jolt testing, and static load testing. The various testing equipment and machines at Building 60 use lubricating, hydraulic, and heating oils. Heating oils were formerly stored in Building 60-A which was located on the west side of Building 60. The recirculation water/steam is discharged into BSB via various pipes projecting out of the eastern wall of the building. These discharges were permitted through a NJPDES permit.

An RI was performed in 1994 that included a radiological survey, surface soil, subsurface soil, surface water, and sediment sampling as well as HHRA and ERAs. The radiological survey did not identify any AOCs. The HHRA determined that carcinogenic risk was between or above 1x10(-4) to 1x10(-6). The ERA determined that contaminants were detected but the communities were not affected and the habitat was highly altered by human activity. The RI recommended that additional sampling be completed to delineate areas of metals, PCB, and semi-volatile organic compound (SVOC) contamination above LOCs. Based on these recommendations and regulatory comment, a follow-on investigation was completed in 1997. This RI identified soil contaminated with SVOCs, PCBs, and metals and sediments contaminated with PCBs. In 1999 an EE/CA was written and in 2000 an IRA was performed for PCBs. A total of 387 cy of soil and sediment was removed from the site. Other areas of the site still contain soils contaminated with SVOCs and metals at moderate levels and PCBs above the residential standard. Groundwater at the site is addressed in the Area D area-wide groundwater FS.

The site is addressed by the ARCADIS PBC. An FS that included a small excavation was submitted in September 2009.

CLEANUP/EXIT STRATEGY

A ROD and RD will be completed. A small removal action and LUCs are expected. The site is included in the site-wide PBC

PICA-011 Maps and Photos

PICA-011

BLDG 60 SATELITE WSTE ACCOM AREA (SITE 122)



Site Name: OPTS PROTO PROC FAC SITE BLDG 91(SITE78)

STATUS

Regulatory Driver: CERCLA
 RRSE: HIGH
 Contaminants of Concern: Metals, Polycyclic Aromatic Hydrocarbons (PAH), Volatiles (VOC)
 Media of Concern: Groundwater, Soil

Phases	Start	End
PA.....	197607.....	198105
SI.....	198707.....	198906
RI/FS.....	199606.....	201109
RD.....	200604.....	201109
RA(C).....	200604.....	201109
LTM.....	201109.....	202109
RIP Date:	N/A	
RC Date:	201109	

SITE DESCRIPTION

Building 91 is located at the intersection of Fourth Avenue and South Sixth Street, in the southern portion of PTA. The building was built in 1942 as a storehouse and supply building. An optics laboratory was constructed in the north end of Building 91 in 1980, and since then has lost its mission. Operations carried out in the optics laboratory included a glass machine shop. A hazardous waste inventory lists Building 91 as containing a hazardous waste satellite area, where cleaning material and oily rags were stored in 1993 in a 55-gallon drum. Currently, the central portion of Building 91 is used as office space. The southern end is used for receiving and storage of many materials received at the arsenal.

Soil samples were taken in 1996. Based upon the results, RI activities were initiated in 1998 for VOCs, SVOCs, and metals in soil, surface water, and sediment. Three groundwater monitoring wells were installed as part of a closure report in 1999 upon removal of two heating oil underground storage tanks (USTs) (3,000 and 7,500 gallons each) on the eastern side of the building. Soil analysis indicates the presence of PAHs in exceedance of the LOCs. Surface water metals concentrations are in excess of the LOCs and sediment contains metals and PAHs at concentrations greater than LOC. Groundwater contamination includes VOC concentrations (two plumes) in excess of LOCs detected during RCRA activities. Delineation of the groundwater VOC contamination was completed in the RI stage. In the RI submitted in 2003, the HHRA results worker scenario is 1x10(-4) and within the 1x10(-4) to 1x10(-6) range for an on-site youth visitor scenario. A pilot study (sodium lactate injection) was funded in FY03 to address VOCs in groundwater. The pilot study was completed in 2005. Results of the pilot study indicated the injection of sodium lactate is a viable alternative for VOCs in groundwater. A screening level ERA (SLERA) conducted in 2004 determined that due to the limited habitat and the relatively low hazard quotients (HQs) (i.e., HQs less than 10), further ecological investigation was not required.

The principal cause for concern at this site is the discharge of VOCs from groundwater to GPB and levels in the groundwater above the established standards in groundwater.

The FST was approved by the USEPA and the NJDEP. The PP was public noticed in April 2010. The soils at the site had been taken out of the PP since the New Jersey standards/ARAR issue affected the schedule. The soils have been added to a site-wide FS but will not affect the RIP date.

CLEANUP/EXIT STRATEGY

The site is included in the site-wide PBC. Expected remedy for the groundwater is MNA.

Existing engineering controls are expected to be the remedy for the PAH-contaminated soil. LTM costs are to be included in the site-wide PBC.

PICA-013 Maps and Photos

PICA-013

OPTS PROTO PROC FAC SITE BLDG 91(SITE78)



STATUS

Regulatory Driver: CERCLA
 RRSE: MEDIUM
 Contaminants of Concern: Metals, Munitions and explosives of concern (MEC)
 Media of Concern: Sediment, Surface Water

Phases	Start	End
PA.....	197607.....	198105
SI.....	198707.....	198906
RI/FS.....	199606.....	201109
RA(C).....	200604.....	201109
LTM.....	201109.....	202109
RIP Date:	N/A	
RC Date:	201109	

SITE DESCRIPTION

Lake Denmark, an artificial lake located in the northeastern portion of PTA, has a surface area of approximately 174 acres and an average depth of six to seven feet, and is part of PTA's service water source with the outfall from the lake flowing into Picatinny Lake. Surface water at Picatinny is not used as raw water for the potable system. Storage magazines, in the 1200 Area, are the only development around Lake Denmark. ANL reported Lake Denmark has a long history as a repository of munitions and their associated wastes. After the 1926 Lake Denmark explosion, munitions were reportedly dumped into the lake. ANL also discussed the possibility of Radiation Technology dumping waste into Lake Denmark. Lake Denmark has been used as an impact area for experimental mortar rounds and other explosive or pyrotechnic munitions. This site is currently inactive. In 1976 and 1981, chloroform was detected at a concentration above the surface water LOC in samples of the water from the outfall of Lake Denmark. In 1985, one water sample was collected from the Lake Denmark outfall and analyzed for pesticides/PCBs. No analytes of concern were detected in the sample.

Explosives, VOCs, SVOCs, pesticides/PCBs, anions, and metals analysis of soil was conducted as part of the 1996 PA/SI. Based upon results of the PA/SI, RI activities were conducted from 1998 to 1999 including VOCs, SVOCs, explosives, and metals analysis of surface water and sediment; targeted metals analysis of soils; and geophysical surveys.

Surface water and sediment analysis indicate the presence of metals in exceedance of LOC. A geophysical survey conducted as part of RI activities indicates three areas may contain metal deposits. HHRA results indicate risks and hazard are within the target levels. Based upon results of the RI, a SLERA was conducted in 2000. Results of the SLERA indicate the level of ecological risk present at Lake Denmark does not warrant a full ERA.

The FS was submitted in October 2009. This site is under the ARCADIS PBC until ROD.

CLEANUP/EXIT STRATEGY

The site is included in the site-wide PBC to completion of the ROD. An FS followed by a PP and ROD will be completed. LUCs and performance monitoring will be recommended for this site. MMRP issues are handled separately.

LTM costs are included in the site-wide PBC.

PICA-015 Maps and Photos

PICA-015
LAKE DENMARK (SITE 54)



Site ID: PICA-020

Site Name: PYROTECHNIC DEMO AREA (SITE 19)

STATUS

Regulatory Driver: CERCLA
RRSE: HIGH
Contaminants of Concern: Metals, Pesticides, Polychlorinated Biphenyls (PCB)
Media of Concern: Soil

Phases	Start	End
PA.....	197607.....	198105
SI.....	198707.....	198906
RI/FS.....	199309.....	200709
LTM.....	200710.....	202109
RIP Date:	N/A	
RC Date:	200709	

SITE DESCRIPTION

This site had been RC, but was reopened to incorporate all the sites in the "13 Sites Institutional Control Record of Decision." The costs for the IC for all sites will be in this site.

These include PICA-036, PICA-070, PICA-083, PICA-088, PICA-092, PICA-095, PICA-099, PICA-100, PICA-105, PICA-110, PICA-112, and PICA-118.

The PP had been public noticed in 2001, but the LUC issue held up the ROD until September 2008 when the ROD was signed.

The RD Work plan regarding the LUCs was submitted and tentatively approved by the USEPA in November 2008. It can not be considered fully approved until the ROD is signed.

The remedial action report (RAR) was approved by the USEPA in December 2008.

Certification reports have been submitted in 2009 and 2010.

LTM of the LUCs will continue.

CLEANUP/EXIT STRATEGY

LUCs will be in accordance with the approved RD plan.

LTM costs will be included in the site-wide PBC.

Site Name: POWER PLNT/HAZ WST TNKS/PROPELL PRD

STATUS

Regulatory Driver: CERCLA
 RRSE: MEDIUM
 Contaminants of Concern: Metals, Volatiles (VOC)
 Media of Concern: Groundwater, Sediment

Phases	Start	End
PA.....	197607.....	198105
SI.....	198707.....	198906
RI/FS.....	199502.....	201209
RD.....	200604.....	201209
RA(C).....	200604.....	201209
LTM.....	201209.....	202109
RIP Date:	N/A	
RC Date:	201209	

SITE DESCRIPTION

PICA-047 and -145 have been consolidated into PICA-022. PICA-022 now represents funding associated with former sites PICA-047 and PICA-145.

The site is covered under the ARCADIS PBC. An FS that included Site 22 was approved by the USEPA in August 2009. The PP was submitted to the regulators in January 2010.

This site consists of Building 519, a former still house for storage of ether and alcohol, and Building 519-A, which formerly housed an inactive 3800-gallon aboveground storage tank (AST), that was used to store spent alcohol. Building 519 and associated buildings were a single-base propellant manufacturing area. Operations at Building 519 also included the manufacture of ether. Building 519-A, constructed in 1941, was an open shed-type structure with no walls. Three ASTs, with an approximate capacity of 3,800 gallons each, were used to store virgin ethyl alcohol, process wastes from explosives manufacturing, ether, and spent alcohol. Building 519 was deactivated in 1975; the ASTs and all associated piping were removed from Building 519-A at approximately the same time. Both buildings were subsequently demolished in 1995 as part of the Toxic and Energetics Cleanup Program (TECUP).

Analytical results of soil samples collected during the RCRA closure of Building 519-A detected levels of lead above its comparison criterion. Phase II RI activities were conducted at this site in 1996. Analytical results from the RI identified explosives and metals in the soil at concentrations above LOCs. Elevated concentrations of SVOCs and metals were also detected in sediment collected from a sump at Building 519. In addition, TCE was reported in one monitoring well in excess of its LOC.

Additional samples collected in 2001 have delineated the extent of the lead contamination in soil, and TCE contamination in groundwater. Results of the HHRA indicated risks and hazards from exposure to surface and subsurface soil are within or below the target levels. Results of the adult lead model indicate lead concentrations in subsurface soil may be a concern for the excavation worker. Based on the calculated environmental effects quotients (EEQs), there is little potential for adverse effects to occur to terrestrial receptors from soil exposure at the site. The suspected location of the former sump is currently a boulder field. As part of a facility-wide sump investigation initiated in 2003, the boulders at Site 50 were removed and a test pit excavated in the area to locate any visual evidence of the sump. Neither stained soil nor odors were noted in the excavation. Post-excavation analytical results of soil samples collected from the excavation did not detect any LOC exceedances and the boulders were returned to the location.

In 2003 PICA-047 and PICA-145 were listed as RC in the AEDB-R and will be addressed under PICA-022.

CLEANUP/EXIT STRATEGY

An FS to include a PP and ROD will be completed for all three sites. Groundwater monitoring will be evaluated at PICA 022. The

Site ID: PICA-022

Site Name: POWER PLNT/HAZ WST TNKS/PROPELL PRD

site is included in the PBC.

At PICA-047 and PICA-45 LUCs are expected; groundwater monitoring requirements will be evaluated in the FS. LTM costs will be included in the site-wide PBC.

PICA-022 Maps and Photos

PICA-022

POWER PLANT/HAZARDOUS WASTE TANKS/PROPELLANT PRODUCTION



Site Name: FORMER REACT MTRS/RCKT FUEL TST A 1500

STATUS

Regulatory Driver: CERCLA

RRSE: MEDIUM

Contaminants of Concern: Explosives, Metals, Semi-volatiles (SVOC)

Media of Concern: Groundwater, Sediment, Soil, Surface Water

Phases	Start	End
PA.....	197607.....	198105
SI.....	198707.....	198906
RI/FS.....	199502.....	201209
RD.....	200604.....	201209
IRA.....	200102.....	200203
RA(C).....	200604.....	201209
LTM.....	201209.....	202109

RIP Date: N/A

RC Date: 201209

SITE DESCRIPTION

This 20 acre site consists of the 1500 series buildings and is divided into the western explosives area and the eastern pyrotechnics area. From the early-1950s up until 1958, liquid fuel missiles were tested in the eastern pyrotechnics area. After 1958 additional buildings were constructed for mixing, pressing, and filling of various pyrotechnic compounds into flares, fuses, and primers. The western explosives area was constructed in the late-1940s and was used for the large-scale storage, production, conditioning, loading, and testing of pyrotechnics, explosives, and solid rocket propellants from 1947 through the early-1960s. The eastern and western explosives areas are currently used for storage, assembly, research, development, and testing of HEs, propellants, and projectiles.

The 1996 phase II RI involved the performance of a radiological survey, installation of monitoring wells, and collection of soil, groundwater, surface water, and sediment samples at the site. The RI identified explosives in groundwater downgradient of the Building 1505 test range; including RDX in excess of its LOC. Lead was detected above its LOC in a sediment sample associated with a dry well. SVOCs and metals have been detected at elevated levels in surface water and sediment samples collected from the swamp behind Building 1515 resulting in ecological concerns for the area. Additional RI activities performed in 2000 included the installation of an additional well and collection of additional soil, groundwater, and sediment samples. Results of this investigation successfully delineated the extent of RDX in the groundwater and characterized the lead contamination. The UST was removed in FY01. Estimated cancer risks are below or within the USEPA's target range of 1x10(-4) to 1x10(-6) for all exposures scenarios. The estimated non-cancer hazards are all below the USEPA's target threshold of one. A suspected dry well and associated lead-contaminated soil were removed in 2003. An additional two cy of lead contaminated soil were removed in 2004 as part of a facility-wide lead removal action.

The site is addressed by the ARCADIS PBC contract. An FS was submitted in December 2009 that included this site.

CLEANUP/EXIT STRATEGY

An FS to evaluate remedial alternatives, PP, and ROD will be completed. The sites are recommended for LUCs. LTM cost will be included in the site-wide PBC.

PICA-050 Maps and Photos

PICA-050

FORMER REACT MTRS/ROCKET FUEL TEST AREA 1500



STATUS

Regulatory Driver: CERCLA
RRSE: MEDIUM
Contaminants of Concern: Metals
Media of Concern: Sediment, Soil, Surface Water

Phases	Start	End
PA.....	197607.....	198105
SI.....	198707.....	198906
RI/FS.....	199502.....	201109
LTM.....	201110.....	202109
RIP Date:	N/A	
RC Date:	201109	

SITE DESCRIPTION

Picatinny Lake, located at the geographic center of PTA, was formed in the 1880s by damming GPB. Picatinny Lake is approximately 118 acres and approximately 5,200 feet long by 1,000 feet wide. The lake has a maximum depth of 20 feet and contains approximately 165 million gallons of water. Picatinny Lake is a source of non-potable water used for production-related purposes and fire fighting.

From 1985 until 1988 PTA discharged treated process wastewater and cooling water to Picatinny Lake under a NJPDES permit. Since 1989, only non-contact cooling water has been discharged to the lake. Many active, inactive, and demolished buildings surround the lake. Surrounding land use includes propellant and munitions R&D, production, and storage; steam and electric power generation; chemical laboratories, and a betatron and x-ray laboratory. Previous land use includes smokeless powder production and testing.

Numerous potential sources of contamination have been documented around the lake, including its use as an impact area for experimental mortar rounds; storage of smokeless powder and explosives underwater; discharge or disposal of explosives and debris into the lake; pyrotechnic testing on Flare Island; explosive-related accidents at the surrounding buildings; oil spills, wastewater discharges or sewage overflows.

Phase II RI and ERA activities included the performance of geophysical surveys, the collection of 23 surface water and sediment samples, the performance of surface water and sediment bioassays, the completion of benthic macroinvertebrate and fish surveys, and the chemical analysis of fish tissue samples. Surface water and sediment contamination was identified throughout the lake. The HHRA conducted with the RI evaluated an industrial research worker's exposure to surface water. The estimated chemical and radiological risks are below the USEPA's target cancer risk range, and the hazards are below the target threshold of one. The available ecological evidence suggests that surface water does not pose a risk to ecological receptors; however, the sediment data indicated that there is potential for ecological contaminants of potential concern (COPCs) to adversely affect benthic receptors.

Results from a fish consumption HHRA for the PTA fishable water bodies indicated hazards above the USEPA's target threshold of one for Picatinny Lake. Thus, PTA instituted fish consumption advisories, as recommended by the NJDEP, for anglers using Picatinny Lake and other bodies of water at PTA.

The FS was submitted in October 2009. The site is addressed by the ARCADIS PBC only to ROD.

CLEANUP/EXIT STRATEGY

An FS to include a PP and ROD will be completed. The site is included in the PBC, but only goes to completion of the ROD. The UXO at this site will be addressed by the MMRP (PICA-009-R-001). Sediment removal near RI Concept Site 40 (PICA 079) LUCs will likely be implemented.

Site ID: PICA-057
Site Name: PICATINNY LAKE (SITE 53)

LTM costs will be included in the site-wide PBC.

PICA-057 Maps and Photos

PICA-057
PICATINNY LAKE (SITE 54)



Site Name: 600 HILL GROUNDWATER PLUME

STATUS

Regulatory Driver: CERCLA
RRSE: HIGH
Contaminants of Concern: Explosives, Metals, Munitions and explosives of concern (MEC), Volatiles (VOC)
Media of Concern: Groundwater, Soil

Phases	Start	End
PA.....	197607.....	198105
SI.....	198707.....	198906
RI/FS.....	199606.....	201209
RD.....	201101.....	201209
RA(C).....	201103.....	201209
LTM.....	201209.....	202109
RIP Date:	N/A	
RC Date:	201209	

SITE DESCRIPTION

The Munitions Waste Pit, Site 12, is located in the northwestern portion of Picatinny, at the intersection of Berkshire Trail and 20th Avenue near former Building 656. The site was operated for evaluating munitions from approximately 1955 until the mid-1980s. A layer of topsoil and sand was deposited on the waste pit after use of the site was discontinued in 1980.

Historical practices consisted of testing munitions, and then filling any resulting crater in the ground with fill material, typically gravel and sand. Many ammunition fragments were projected out from the site and were never recovered. According to Picatinny personnel, from 1965 to the present no munitions were disposed of at the site. Since that time, all material associated with munitions testing was taken to the Picatinny Burning Ground.

Based on a document review, the site currently consists of a gun turret, formerly used for ammunition testing, an elevated stand from which munitions were hung and/or fired, a metal cage in which munitions were detonated and hazard classification tests were conducted, three concrete bases with a cut projectile casing set in each, several eight-inch gun barrels, one partial jet hull, two pieces of concrete storm sewer piping about 18 inches long, and several mounds of building debris (including asphalt, concrete blocks, and bricks). Propellant grains were scattered on the ground in the area of the metal cage and the three concrete bases. Historically, the site has also contained a control building (former Building 656), a guard shack, a second elevated stand, two additional jet hulls, a steel test unit, and steel observation towers in the western and central portions of the site. A steel box, wood box, wire mesh box, and a steel trough are located in the northern section of the site. The steel trough was used to fire munitions, not for waste discharge.

In the late-1990s a large amount of rock and fill dirt was placed on the site. The rock and fill dirt were removed from a nearby construction site.

This site also includes the groundwater beneath PICA-058 and adjacent sites. In the early-1990s, a production well was installed to serve the advanced warhead development facility (AWDF), Building 660. Analysis of groundwater from this well indicated contamination with TCE and low levels of methyl tertbutyl ether (MTBE), freon, and toluene. MTBE contamination at this site will be addressed under the compliance-related cleanup (CC) program site CC-55. Surface water and groundwater sampling of monitoring wells in the 600 Area identified levels of RDX in surface water and groundwater. An additional investigation was performed to determine the source of the RDX contamination in the surface water and groundwater in the Building 650 area. The investigation delineated the contamination and the regulators concurred that no further investigation was needed for RDX.

A groundwater RI was initiated for this site in 2004. This investigation revealed higher concentrations of TCE [170 parts per billion (ppb)] beneath PICA-058. Additional investigations have identified RDX contamination in surface water and have delineated the extent of the TCE contamination in the groundwater. A risk assessment for groundwater exposure at the site has been completed.

Risk assessment results indicate acceptable levels of risk cancer risk within the target risk range. The HHRA evaluated the following hypothetical risk scenarios to include industrial research workers and construction excavation workers. These

Site ID: PICA-058

Site Name: 600 HILL GROUNDWATER PLUME

hypothetical scenarios evaluated groundwater, surface water, and indoor air. Maximum potential risk from all pathways was $0.0051.1 \times 10^{-5}$ in the industrial research worker scenario. Maximum hazard from all pathways was 0.0057 in the industrial worker scenario.

This site is not covered under the PBC.

The FS was approved by the USEPA in March 2010 and the PP submitted in spring 2010.

CLEANUP/EXIT STRATEGY

A ROD and the RD will be completed after the public notice of the PP. The preferred remedial alternative involves LTM of the TCE plume and continuous implementation of ICs. The LTM will include semiannual sampling for the first 10 years, annual for the next 10 years, followed by monitoring once every five years for 40 years.

PICA-058 Maps and Photos

PICA-058

INACTIVE MUNITIONS WASTE PIT (B-656)(SITE 12)



STATUS

Regulatory Driver: CERCLA

RRSE: MEDIUM

Contaminants of Concern: Metals, Radionuclides, Semi-volatiles (SVOC), Volatiles (VOC)

Media of Concern: Groundwater, Soil

Phases	Start	End
PA.....	197607.....	198105
SI.....	198707.....	198906
RI/FS.....	199105.....	200505
RD.....	200506.....	200610
RA(C).....	199112.....	200708
LTM.....	200710.....	202109

RIP Date: N/A

RC Date: 200709

SITE DESCRIPTION

The Post Farm Landfill consists of 10.3 acres located along the top of the unnamed hill that forms the southeastern boundary of PTA. It contains a borrow pit near the central portion of the site, and two landfilled areas where drums and other materials were buried. During the 1950s, the site was used mostly as a source of borrow materials. In the 1960s landfilling activities began in the southern and northern area of the site. These areas are referred to as the northern Drum Burial Area (DBA) and southern DBA. The DBAs reportedly received fly ash from coal burning operations, paint stripping wastes, phenols, and spent explosive-laden hydraulic oils in containers or as free liquid.

A PA was performed in 1991 that recommended a SI and non-time critical removal action (TCRA). In 1992 a non-TCRA was performed to remove buried containers at the site. During the removal action, small containers, garbage cans, batteries, and drums were removed and disposed of off-site. Post excavation sampling and exploratory trench sampling were also completed as part of the action. The trench investigation determined that all buried containers had likely been removed from the site. The last phase of the action included placing at least six to 18 inches of native soil over the former burial areas.

An RI was completed in 1994 with additional sampling in 1996/1997. The 1994 HHRA indicated that carcinogenic risk was in the range of 1X10(-4) to 1X10(-6) from PAHs, PCBs, and dioxins/furans. This HHRA was based on a limited number of samples. The 1996/1997 RI included completing soil borings, installing monitoring wells, collecting surface soil, sediment, surface water, and groundwater samples, and completing a fracture trace analysis. Results indicate moderate criteria exceedances in surface soil for metals and SVOCs, in subsurface soil and sediment for metals, and in groundwater for VOCs, dioxins/furans, metals, and radionuclides. The detections of dioxins/furans were not reproduced in the later 1997 sampling event.

In 2000 an FS was completed which evaluated excavation and disposal, on-site fixation, capping, and ICs. The FS recommendation was for ICs and long-term groundwater monitoring. The USEPA and the NJDEP approved the FS. A PP was finalized and a public meeting was held in December 2003. A ROD was signed by the Picatinny Garrison commander in September 2004 and by the USEPA in December 2004. The USEPA and the NJDEP approved the RD in December 2006.

Surface soil sampling conducted in May 2007 confirmed that previously detected concentrations of metals and SVOCs in soil were isolated in nature and the existing vegetative cover is sufficient. Quarterly groundwater monitoring for target analyte list (TAL) metals, VOCs, and radiological parameters was performed as part of the long-term monitoring program in 2007. In 2008, groundwater monitoring was reduced to annual sampling per the approved exit strategy in the RD. Annual reports continue based on sampling results.

CLEANUP/EXIT STRATEGY

The long-term monitoring program outlined in the approved RD will be evaluated on an annual basis and revised as needed in accordance with the RD work plan.

Site ID: PICA-065
Site Name: POST FARM LANDFILL (SITE 23)

LTM costs will be included in the site-wide PBC.

Site Name: SANITARY LANDFILL(NEAR SITE 20)SITE 24

STATUS

Regulatory Driver: CERCLA

RRSE: HIGH

Contaminants of Concern: Metals, Pesticides, Polychlorinated Biphenyls (PCB)

Media of Concern: Soil

Phases	Start	End
PA.....	197607.....	198105
SI.....	198707.....	198906
RI/FS.....	199309.....	200206
LTM.....	200207.....	202109

RIP Date: N/A

RC Date: 200206

SITE DESCRIPTION

Site 24 occupies approximately 28 acres adjacent to the southern boundary in the southwestern corner of the arsenal. Records indicate that sanitary waste, fly ash, ordnance, industrial wastes and wastewater treatment plant sludge were dumped on a portion of the site. PICA-066 covers all environmental media at this site with the exception of groundwater. Site groundwater is being addressed in PICA-205.

A 1994 RI included geophysical, radiological, and soil gas surveys in addition to surface soil, subsurface soil, surface water/sediment, and groundwater samples analyzed for VOCs, BNAs, metals, cyanide, explosives, pesticides, PCBs, dioxins/furans, and radiologicals. Metals, PCBs, and pesticides were detected above surface soil LOCs. VOCs and metals were detected above surface water LOCs. Metals, cyanide, and pesticides were detected above sediment LOCs. The HHRA determined that carcinogenic risk fell between or exceeded the 1x10(-4) to 1x10(-6) risk range from arsenic, beryllium, PCBs, and dioxins/furans. The HI did not exceed one. Additional RI activity was completed in 1997 including soil gas survey, geoprobe groundwater sampling, surface soil sampling, subsurface soil sampling, and surface water sediment sampling. Samples were analyzed for VOCs, SVOCs, pesticides, PCBs, and metals. Surface soil LOCs were exceeded for pesticides, PCBs, and metals. This sampling event included a large sampling grid to completely delineate PCB contamination of surface soil.

In 2000 an FS was conducted that included a BERA that determined that exposure to lead and dichloro-diphenyl-trichloroethane (DDT) in soil could lead to elevated hazards for avian species. The FS also selected PCBs as a COC based on risk to human health. Site-specific remediation goals (RGs) were developed for these compounds. The FS examined a vegetative soil cover, an asphalt cover, and excavation and disposal of soils contaminated with PCBs above NJDEP criteria and lead and DDT above a site-specific ecological action level. A PP was completed for this site and public notice was completed in July 2001. A ROD was prepared in summer 2001 and signed in spring 2002. In order to complete the design of the soil cover additional delineation sampling was completed in summer 2001. Some of these samples contained PCBs at much greater concentrations (3,500 mg/kg) than were seen in the 1997 soil grid sampling (297 mg/kg). Soils containing PCBs at concentrations over 297 mg/kg were excavated and disposed of off-site. The vegetated soil cover was completed in 2003. The wetlands that were destroyed by the capping were replaced with an enhanced wetland pursuant to the wetland permit-equivalent for the action.

Certification reports have been submitted annually on maintenance for the cover. The site is covered under the ARCADIS PBC.

CLEANUP/EXIT STRATEGY

Cap maintenance and ICs will be maintained in accordance with the land use control implementation plan (LUCIP) in the ROD. The site is included in the PBC.

PICA-066 Maps and Photos

PICA-066

SANITARY LANDFILL(NEAR SITE 20) SITE 24



Site Name: SANITARY LANDFILL(NEAR SITE 26)SITE 25

STATUS

Regulatory Driver: CERCLA
RRSE: HIGH
Contaminants of Concern: Metals, Polycyclic Aromatic Hydrocarbons (PAH)
Media of Concern: Soil

Phases	Start	End
PA.....	197607.....	198105
SI.....	198707.....	198906
RI/FS.....	199309.....	200708
RD.....	200604.....	200708
RA(C).....	200604.....	200709
LTM.....	200709.....	202109
RIP Date:	N/A	
RC Date:	200709	

SITE DESCRIPTION

Site 25 consists of about eight acres and is located within the central valley of PTA. The area has been divided into four sections; the southern borrow area, the landfill area, the Dredge Pile (RI Site 26, PICA-068) and the northeast area. PICA-068, the Dredge Pile, has been combined with this site (PICA-067). All issues associated with the Dredge Pile will be addressed under this site. Therefore, PICA-068 is considered RC. The southern borrow area consists of a two acre grass-covered clearing formerly used for landfilling. The Dredge Pile encompasses about 2000 square feet, near the center of the site and is about 15 to 20 feet high. A variety of wastes were disposed of at Site 25 from the 1940s through the 1970s. These wastes included rubbish, industrial wastes, shells, and sewage treatment plant sludge. The landfill was closed and covered in 1972. The site is currently inactive.

An RI was completed for the site in 1994. The field portion of this RI consisted of a geophysical survey, radiological survey, soil gas survey, soil sampling, test pitting, monitor well installation, and groundwater sampling. An HHRA and ERA were also conducted a part of the RI. The HHRA determined that the cancer risk was between 1X10(-4) and 1X10(-6) mainly associated with PAHs. The RI report concluded that the site should proceed to FS to address human health risk associated with SVOCs, dioxins/furans, metals, and PCBs. Ecological risk modeling indicated the potential for impact to terrestrial species from metals.

An FS was initiated to address these issues, but was stopped due to inadequate delineation of soil contamination and marginal risk associated with the site. In order to facilitate the performance of the FS, additional delineation of PAH contaminated soil was performed in 1997 to delineate PAH contamination in the northeast corner of the site. To determine the best course of action in light of all data and the level of risk associated with the site, a risk management plan was drafted in 2000. The risk management plan determined that human health risk resulting from PAH contaminated soils was within the risk range 1X10(-4) to 1X10(-6). It also determined that metals and pesticide-contaminated soils could potentially drive ecological risk. Based on these concerns, the risk management plan recommended that an FS be performed.

The FS, which was finalized in 2003, recommended extending a parking lot to cover the PAH-contaminated soil. The PP and public meeting for the site were completed in December 2004. The ROD for the site was submitted to the regulators in June 2005 and resubmitted after comments from the USEPA; the preferred remedy in the revised ROD was revised to a vegetative soil cover in lieu of an asphalt cover. The revised ROD was approved by the USEPA and was signed in July 2007.

A soil cover was constructed at the site in September 2007. The interim RAR report and certification reports have been provided annually and approved accordingly.

CLEANUP/EXIT STRATEGY

LTM at the site will be continued. Costs are captured under the PBC.

Site Name: DRUM STRG AREA(B31 YARD) SITE 29

STATUS

Regulatory Driver: CERCLA

RRSE: MEDIUM

Contaminants of Concern: Metals, Petroleum, Oil and Lubricants (POL), Polychlorinated Biphenyls (PCB)

Media of Concern: Groundwater, Soil

Phases	Start	End
PA.....	197607.....	198105
SI.....	198707.....	198906
RI/FS.....	199309.....	201209
LTM.....	201209.....	202109

RIP Date: N/A

RC Date: 201209

SITE DESCRIPTION

Site 29 is a former drum storage area located in an outside courtyard between wings 1 and 2 near the northwest corner of Building 31. Building 31 has two stories, a concrete foundation, and consists of five wings with three courtyards. Building 31 was a metal workshop containing various types of equipment including lathes, milling machines, and drill presses. Operation of these machines generated cutting oils and machine oils, which were collected in 55 gallon drums that were stored outside the building.

In 1989 an SI was conducted. State criteria were exceeded for metals, VOCs, BNAs, and TPH. An RI was conducted in 1994. No petroleum related contaminants were detected in the RI sampling. Under the RCRA program, a tank was removed and confirmatory sampling conducted. The confirmatory sampling consisted of sampling in the tank excavation and advancing soil borings in the area of contamination identified in the 1989 site investigation. In the late-1990s, follow-up investigation took place to further address issues discovered in the 1989 site investigation. All tanks associated with this site have been removed. All of the courtyards at Building 31 are contaminated with PCBs, petroleum, and SVOCs. Some wells at the site are also contaminated with petroleum.

Building 31 has been transformed into an armament software center. Regulators have been notified of the situation; institutional and engineering controls will be integrated with the new facility.

Approximately 500 tons of petroleum contaminated soil [six to 10 feet below ground surface (bgs)] located off the northwest corner of Building 31 was removed in early FY04. Soil in the courtyards has been covered over with concrete, asphalt, or coarse gravel.

The RI was completed in 2005 and approved by the regulators. The FS was submitted to the regulators in the spring of 2006. The USEPA and the NJDEP have provided comments; however, the continuation of the FS will be integrated into a site-wide FS ARCADIS will be submitting.

In 2003 PICA-084 was listed as RC in the AEDB-R and will be addressed under PICA-071.

An FS that included this site was submitted to the regulators in October 2009.

CLEANUP/EXIT STRATEGY

An FS, a PP, and a ROD will be completed. The consolidated site is covered by the PBC. Groundwater monitoring may continue. LUCs will be implemented. LTM costs are included in the site-wide PBC.

PICA-071 Maps and Photos

PICA-071
DRUM STORAGE AREA(B31 YARD) SITE 29



Site Name: FORMER GAS STATION/ DRMO(SITE 31)

STATUS

Regulatory Driver: CERCLA
 RRSE: HIGH

Contaminants of Concern: Metals, Polychlorinated Biphenyls (PCB), Polycyclic Aromatic Hydrocarbons (PAH), Semi-volatiles (SVOC), Volatiles (VOC)

Media of Concern: Groundwater, Sediment, Soil, Surface Water

Phases	Start	End
PA.....	197607.....	198105
SI.....	198707.....	198906
RI/FS.....	199309.....	200907
RD.....	200907.....	200909
IRA.....	199304.....	199305
RA(C).....	200909.....	200910
RA(O).....	200909.....	202709
RIP Date:	200910	
RC Date:	202709	

SITE DESCRIPTION

This site includes five buildings located on six acres of land. The site has been used as a storage yard for disposal, salvage, and sale of excess materials. A variety of items including materials used in the manufacturing and testing of explosives, pyrotechnics, and munitions, potential PCB-containing transformers, scrap metal, used batteries, and motor vehicles were stored in the area. PICA-072 includes all environmental media at RI sites 31 and 101 (formerly PICA-116).

A 1989 site investigation indicated that surface soils were contaminated with oil, grease, PCBs, metals, and BNAs above LOC. Sediments were contaminated with oil, grease, BNAs, and metals.

In 1991 a RCRA closure investigation was performed on an asphalt area adjacent to Building 314 formerly used to store batteries. Closure verification samples (surface soil samples and chip samples) were collected and analyzed for VOCs and PP metals. Analytical results indicted the storage of batteries may have been a source of metals contamination in surface soil. In 1991 a RCRA closure investigation was conducted on a room inside the building formerly used to store photographic film. The area was pressure washed and chip samples were collected. Also in 1991, a RCRA closure verification sampling event was conducted at Building 314-E to evaluate an area used for storage of discarded lead batteries and equipment. The area was pressure washed and rinse and chip samples were collected. The RCRA closure report for all three investigated areas was approved by the NJDEP.

In 1993 an investigation was conducted to evaluate the potential for contamination of soil and groundwater from metals, TPH, benzene, toluene, ethylbenzene, xylene (BTEX), and PCBs. PAHs, metals, and PCBs were detected above LOC in soil, and metals were detected above LOC in groundwater.

A follow-up investigation was conducted in 2000. Surface soil grid samples were collected for VOCs, SVOCs, metals, PCBs, dioxins, and explosives. Six AOCs were found based on exceedance levels of metals, PCBs, and PAHs. Soil contamination at this site is widespread and contains "hot-spots" of metals and PCBs. Maximum levels of contamination in surface soil include Aroclor 1260 5,100 mg/kg, copper 68,500 mg/kg, lead 35,900 mg/kg, and zinc at 53,800 mg/kg. Maximum levels of metals in site sediment include copper at 6,580 mg/kg and lead at 3,330 mg/kg. Additional sampling was conducted in 2001 to delineate PCB contamination adjacent to Building 314D. Extensive PCB-contaminated soil was detected in the area. The estimated risk and hazards for the industrial research worker exceed the target levels. The primary risk and hazard drivers are PCBs. In addition, lead is deemed a concern at the site.

In 2003 PICA-116 was listed as RC in AEDB-R and will be addressed under PICA-072.

A final FS has been completed and a PP was submitted to the regulators in December 2006.

Public notice of the PP was released in October 2007. The ROD was signed in June 2009 and the RD work plan at the same time period. The work was completed with the improved conventional munitions (ICM) removal and cover from the same geographic

Site ID: PICA-072

Site Name: FORMER GAS STATION/ DRMO(SITE 31)

that was included in the MMRP by the same contractor.

CLEANUP/EXIT STRATEGY

At PICA-072 and PICA-116, after the remediation of the site that included removal and disposal, capping and cover and the disposal of ICMs within the site, LUCs and maintenance will continue.

To address surface water and sediment contamination, long-term chemical and biological monitoring will be implemented and groundwater monitoring aspects will be incorporated into the Mid-Valley groundwater study.

Existing LUCs will be maintained. Additional LUCs (includes engineering and ICs) will be implemented across the entire site to preclude residential land use. The site is included in the PBC.

Site Name: EQPMT & WASTE STORAGE IN 3000-AREA

STATUS

Regulatory Driver: CERCLA
 RRSE: MEDIUM
 Contaminants of Concern: Metals, Semi-volatiles (SVOC), Volatiles (VOC)
 Media of Concern: Groundwater, Soil

Phases	Start	End
PA.....	197607.....	198105
SI.....	198707.....	198906
RI/FS.....	199606.....	201209
RD.....	200604.....	201209
RA(C).....	200604.....	201209
LTM.....	201209.....	202109
RIP Date:	N/A	
RC Date:	201209	

SITE DESCRIPTION

Building 3100 was constructed as a storage facility in 1942. From 1942 until the early-1950s Building 3100 was used for explosives storage, and was serviced by a rail line on the west side of the building. From the early-1950s until 1975, the building was utilized as an environmental test building. Materials tested in the environmental lab included: fully loaded rocket components and ordnance items, such as solid propellant boosters and sustainers, prepackaged liquid rocket engines, and gas generators; however, no exposed explosives were tested.

Use of the building, as a waste storage facility, began in 1981 under interim status until March 1991, when PTA was granted a hazardous waste facility permit. Building 3100 is currently the only RCRA-permitted hazardous waste storage facility at PTA. In February 2000 a flammable storage locker was added to the building. Operations in the building include sorting and overpacking of waste materials that are picked up from various organizations throughout the post. The storage of oxidizers, poisons, corrosives and flammables are permitted in the building. There are no floor drains in the building.

In 1996 a PA/SI was conducted for Building 3100. Soil samples were analyzed for explosives, VOCs, SVOCs, pesticides/PCBs, anions, and metals. One soil sample contained beryllium at a concentration equal to the LOCs. RI activities were initiated in 2000 for the analysis of VOCs, SVOCs, TAL metals, cyanide, anions, explosives, and ethylene glycol. Metals were detected at concentrations marginally above LOC in soil. In 2001 additional subsurface soil samples were collected around Building 3100 as part of the Mid-Valley groundwater investigation. The samples, which were analyzed for VOCs, did not contain any LOC exceedances. No additional sampling is planned for this site. The field investigations and RSA results from the BERA indicated that effects from exposure, if any, were not impacting the local populations of small mammals or birds. All samples collected at this site are associated with the adjacent Shell Burial Area.

In 2003 PICA-086, -141 and -191 were listed in AEDB-R as RC and will be addressed under PICA-075.

The site is addressed by the ARCADIS PBC contract. An FS was submitted in December 2009 that included this site.

CLEANUP/EXIT STRATEGY

An FS (the 45 site FS was submitted in December 2009), a PP, and a ROD will be completed for PICA-075, PICA-086, PICA-141, and PICA-191. The site is included in the PBC. LUCs are recommended.

PICA-075 Maps and Photos

PICA-075

EQUIPMENT & WASTE STORAGE IN 3000-AREA



Site Name: FORM METL PLATG WSTWTR FAC/LAGOONS B-24

STATUS

Regulatory Driver: CERCLA
 RRSE: MEDIUM
 Contaminants of Concern: Volatiles (VOC)
 Media of Concern: Groundwater, Surface Water

Phases	Start	End
PA.....	197607.....	198105
SI.....	198504.....	199003
RI/FS.....	199105.....	200409
RD.....	200410.....	200612
IRA.....	199209.....	200609
RA(C).....	200604.....	200709
RA(O).....	200604.....	202709
RIP Date:	200709	
RC Date:	202709	

SITE DESCRIPTION

Site 37 consists of a former wastewater treatment facility and lagoons associated the metal plating activities formerly housed in Building 24. The lagoons were suspected to have leaked, and were closed under interim status in 1981. This closure included excavation of 317 cy of soil. Final closure of the Building 24 surface lagoons occurred in 1991 including demolition of the concrete basins and excavation of additional soils. The action removed 660 cy of soil and 240 cy of concrete. The regulators have accepted this closure. A dry well which never had interim status was constructed in 1961, and was closed in 1991 in accordance with New Jersey hazardous waste regulations. The closure of the dry well has been accepted by the regulators.

There have been numerous investigations of the TCE plume at this site. Two wells were sampled for metals and anions from 1958 to 1985. From 1981 to 1985, 21 wells were installed and sampled for VOCs, phenol, metals, anions, and cyanide. LOCs were exceeded for metals and VOCs. In 1986, a drive point investigation was completed and indicated high levels of VOCs. In 1987, streambed piezometers and 33 additional wells were sampled for VOCs and metals. VOCs were determined to be discharging to GPB. In 1989, 23 monitoring wells were installed and sampled for VOCs. Between 1990 and 1992, an additional 69 samples were collected from the wells. In 1992 an IRA was initiated when a hydraulic barrier pump-and-treat (P&T) system was installed to impede the flow of TCE to GPB. This plant has been in operation since 1992, and wells have been sampled for VOCs quarterly from 1992 to 2000 and are currently sampled semiannually. In 1994 an RI was completed and a round of samples was collected from existing wells and one new well. The 1994 HHRA found cancer risk between or above the 1x10⁻⁴ to 1x10⁻⁶ range (assumes direct groundwater use). Pilot scale remedial technology studies have been carried out by the USGS including air sparging, methane sparging, and surfactant treatment.

In 1997 an FS data gap investigation determined the applicability of MNA. An FS and flow and transport model were completed. The FS examined P&T, six phase heating with soil vapor extraction (SVE), accelerated bioremediation, MNA, and reactive barrier wall. The FS determined that MNA would take an extended period (more than 100 years). A revision to the draft FS that examined more aggressive treatment alternatives was submitted in summer 2001. Based on this analysis, the preferred alternative is the reactive barrier wall. Two pilot studies [propane and hydrogen releasing compound (HRC)] have been completed, to investigate potential techniques to address residual accessible source area contamination, thereby reducing overall cleanup times. Additionally a geotechnical investigation was performed in fall 2002 and will be included in the permeable reactive barrier (PRB) design. The FS for Area D groundwater was finalized in May 2003 and has been accepted by the regulators. The PP was finalized in July 2003 and sent to public notice. A ROD was signed by the USEPA in September 2004. A concept RD was submitted in October 2006. A final RD was submitted in January 2007. A pre-design investigation was implemented in the winter of 2007.

A permeable reactive wall was installed in spring 2007. The interim action P&T system was stopped and mothballed based on the requirements in the ROD. MNA sampling as a component of this remedy to address groundwater and compliance monitoring of GPB was implemented in September 2007. Indoor air sampling was also completed in accordance with the ROD.

The RA report and subsequent annual reports have all been submitted.

Site ID: PICA-076

Site Name: FORM METL PLATG WSTWTR FAC/LAGOONS B-24

CLEANUP/EXIT STRATEGY

MNA for the groundwater and compliance sampling of the surface water will continue as well as LUCs.

The site is included in the PBC. LTM costs are included in the site-wide costs for the PBC site. Decommissioning of the P&T facility will occur in 2010.

PICA-076 Maps and Photos

PICA-076

FORMER METAL PLATING WASTEWATER FACILITY/LAGOONS B-24



STATUS

Regulatory Driver: CERCLA
RRSE: HIGH
Contaminants of Concern: Volatiles (VOC)
Media of Concern: Groundwater

Phases	Start	End
PA.....	197607.....	198105
SI.....	198504.....	199005
RI/FS.....	199105.....	200709
RD.....	200604.....	200709
RA(C).....	200604.....	200709
RA(O).....	200603.....	200804
LTM.....	200804.....	202109
RIP Date:	200709	
RC Date:	200804	

SITE DESCRIPTION

Site 38 consists of the former underground treatment tanks within Building 95 and Area E groundwater. RI Sites 38 and 22 have been combined. PICA-077 covers all environmental media at these sites. Building 95 served as a circuit board etching operation from 1961 to 1988. Manufacturing at Building 95 consisted of electroplating operations. The wastewater was discharged into the treatment system where it was stored and treated in nine USTs. These tanks were constructed of concrete, and in some cases lined with brick and/or epoxy lining systems. Integrity testing of the seven tanks was conducted in 1988. All tanks failed and were removed from service. As a result, the nine USTs were filled with concrete as part of RCRA closure activities in 1991. The NJDEP approved these activities.

There have been numerous studies conducted at Site 38 as well as on Area E groundwater. Only the significant investigations are summarized here. Site 38 sampling included confirmatory samples collected during the RCRA closure of the tanks and subsurface soil samples collected as part of tank removal. Area-wide previous studies included surface water and sediment samples collected for metals, VOCs, and water quality parameters. Piezometers were sampled for VOCs. In the phase I RI, sediment samples were collected for VOCs, BNAs, metals, and pesticide/PCBs. Groundwater investigations included installation and sampling of 45 wells before 1989, 32 additional wells in 1989, and three rounds from 26 existing wells in 1994. The results of this sampling indicated that metals and VOCs were above LOCs. The HHRA found the carcinogenic risk between or above the 1X10(-4) to 1X10(-6) (based on on-site consumption) range based on VOCs, metals, and PCBs. Quarterly sampling was conducted on seven wells from 1990 until 2001. These seven wells are now sampled semiannually. In 1999 an FS data gap investigation sampled 36 wells, surface water, and minpiezometers for VOCs. A smaller number of wells were sampled for metals and redox parameters.

The levels of chlorinated solvents exceed maximum contaminant levels (MCLs) and New Jersey groundwater standards. GPB is acting as a barrier to contaminant transport; however, levels detected in the brook are below surface water criteria. The FS evaluated MNA, P&T, chemical oxidation, and air sparging with SVE. Currently, the proposed remedy is MNA. A bench scale evaluation of chemical oxidation was completed in 2002.

The final FS incorporates this new data and proposes MNA as the final remedy. A PP was finalized and a public meeting held in November 2004. The ROD was signed by the Army and the USEPA in July 2007 and September 2007, respectively. MNA sampling will continue, LUCs are also part of the remedy. RD work plan was approved and the subsequent reports have been submitted.

In 2003 PICA-010 was listed as RC in AEDB-R and will be addressed under PICA-077.

CLEANUP/EXIT STRATEGY

Site ID: PICA-077
Site Name: Area E Groundwater (Site 38)

The MNA remedy consists of sampling approximately 14 wells for VOCs quarterly for two years, then semiannually for five years, then annually for 23 years. Post-remediation sampling will be completed for three years for MNA (VOCs). LUCs are also part of this site. LTM costs are included in the site-wide PBC.

Site Name: ORDNANCE/EXPLOSIVE BLDGS 800 AREA

STATUS

Regulatory Driver: CERCLA
 RRSE: LOW
 Contaminants of Concern: Explosives, Metals, Polychlorinated Biphenyls (PCB), Semi-volatiles (SVOC)
 Media of Concern: Groundwater, Sediment, Soil, Surface Water

Phases	Start	End
PA.....	197607.....	198105
SI.....	198707.....	198906
RI/FS.....	199502.....	201009
RD.....	200604.....	201009
RA(C).....	200604.....	201009
RA(O).....	200604.....	202709
RIP Date:	201009	
RC Date:	202709	

SITE DESCRIPTION

This site consists of Building 809, a wastewater treatment plant, and Building 810, a melt-pour facility for large projectiles. Building 809 was constructed in 1944 for use as a large caliber projectile washout facility. Washout operations included the steam cleaning of off-specification projectiles. Explosives-contaminated wastewater from shell washout operations was discharged to a nearby leaching pool, which eventually discharged to Picatinny Lake. Building 809 was later converted to its current use, a wastewater treatment plant for treating explosives-contaminated wastewater.

Building 810 was constructed in 1930 for use as an operating facility. The building was renovated in 1940 for its current use as a melt-pour facility. Operations at Building 810 involve melting explosives in kettles and pouring the explosives into projectiles, and transporting the projectiles by conveyor to a cooling bay. Three transformers located on the southwest side of Building 810 reportedly contained PCBs.

Phase II RI activities included the installation of five monitoring wells and the collection of soil, groundwater, surface water, and sediment samples. Explosives and metals were reported at concentrations exceeding LOCs in groundwater and soil, over an extensive area, to the east of Buildings 809 and 810. Elevated levels of explosives and metals were also detected in the surface water and sediment samples collected adjacent to the site, probably due to overland runoff and erosion of contaminated soil discharging to Picatinny Lake. Soil and sediment bioassays, conducted as part of the phase II ERA, found 100 percent mortality in the test organisms. In addition, large portions of the site are devoid of vegetation, suggesting that the soil contamination is also toxic to vegetation. The installation of two bedrock monitoring wells, and the collection of additional groundwater samples, during the Group 1 RI helped define the extent of the groundwater contamination. Results of the HHRA indicate that the risk and hazard from exposure to impacted site media are above the target levels of 1X10(-4) and one, respectively. The risk and/or hazard drivers are RDX and 2,4,6-TNT in soil and 2,4,6-TNT in groundwater. Fieldwork to address data gaps was conducted in summer 2002 and the Group 1 FS was completed in late 2004. The Group 1 FS addresses all media at PICA-079, 139, 151, and 152.

In situ enhanced bioremediation was originally selected as the preferred alternative to address groundwater, however, subsequent sampling has demonstrated significant attenuation and migration of contaminants. Therefore, MNA is being recommended as the preferred remedy for groundwater. A demonstration project to evaluate the use of recirculating wells for substrate was implemented in 2008. Explosives contaminated soil will be excavated for on-site treatment through disposal at an approved off-site facility. All other AOCs will be addressed through ICs. The sediment near the site will be addressed per the Lake Picatinny AOC.

The PP was public notice in October 2009 and the approved Army ROD sent to regulators in March 2010. This site is addressed under the ARCADIS PBC.

In 2003 PICA-139, PICA-151 and PICA-152 were listed as RC in the AEDB-R and will be addressed under PICA-079.

Site ID: PICA-079

Site Name: ORDNANCE/EXPLOSIVE BLDGS 800 AREA

CLEANUP/EXIT STRATEGY

A ROD will be signed for all four sites. The site is included in the PBC.

At PICA-079, remediation is expected to be MNA and excavation and disposal of the TNT contaminated soil and disposal at an approved off-site facility.

At PICA-152, remediation is expected to be soil by excavation and disposal at an approved off-site facility.

Groundwater monitoring will continue to include LTM [SIs, five-year reviews, GIS operations, and LUCs]. LTM costs are included in the site-wide PBC.

PICA-079 Maps and Photos

PICA-079

ORDNANCE/EXPLOSIVE BLDGS 800 AREA



STATUS

Regulatory Driver: CERCLA
 RRSE: MEDIUM
 Contaminants of Concern: Explosives, Metals, Semi-volatiles (SVOC)
 Media of Concern: Sediment, Soil, Surface Water

Phases	Start	End
PA.....	197607.....	198105
SI.....	198707.....	198906
RI/FS.....	199502.....	201209
RD.....	200604.....	201209
RA(C).....	200604.....	201209
LTM.....	201209.....	202109
RIP Date:	N/A	
RC Date:	201209	

SITE DESCRIPTION

Building 507 was constructed in 1929 for use as a train engine maintenance facility. From 1987 to the present, Building 507 has been used as a garage facility for utility line maintenance vehicles. Waste materials, such as waste oil and spent cleaning solvents, were reportedly stored in 55-gallon drums in a shed adjacent to the eastern side of the building.

In 1991 a RCRA closure was performed for the shed. Elevated levels of SVOCs and metals were reported in the soil samples around the shed. The phase II RI, conducted in 1996, included the performance of a geophysical survey, the performance of a soil-gas survey, the installation of one monitoring well, and the collection of soil and groundwater samples. Results of the geophysical survey did not identify any USTs at the site. No soil-gas analytes were detected above the reporting limits. The RI also identified SVOC and arsenic contamination in the soil around Building 507. Additional samples, collected in 2001, could not delineate the extent of the arsenic contamination; additional sampling is not possible due to the presence of underground utilities and overhead power lines. The results of the HHRA indicated that the estimated cancer risk and HI from exposure to surface soil by the site industrial research worker exceed the target levels. The estimated risk from subsurface soil exposure are within the USEPA's target risk range of 1×10^{-4} to 1×10^{-6} and the hazard for this exposure is below the target threshold level of one.

An FS was approved by the USEPA in August 2009. The PP was submitted in January. The site is handled within the ARCADIS PBC.

In 2003 PICA-064, PICA-073, PICA-074, PICA-140, PICA-142, PICA-146, PICA-148, PICA-149, PICA-150, and PICA-156 were listed as RC in the AEDB-R and will be addressed under PICA-085.

CLEANUP/EXIT STRATEGY

An FS to include a PP and a ROD will be completed addressing all of the sites. The site is included in the PBC.

LUCs will be recommended for PICA-064, PICA-074, PICA-085, PICA-140, PICA-148, PICA-149, and PICA-150.

LTM costs are included in the site-wide PBC.

PICA-085 Maps and Photos

PICA-085
BUILDINGS IN 500-AREA



Site ID: PICA-091

Site Name: BLDGS IN 200-AREA

STATUS

Regulatory Driver: CERCLA

RRSE: MEDIUM

Contaminants of Concern: Explosives, Metals, Polychlorinated Biphenyls (PCB), Semi-volatiles (SVOC)

Media of Concern: Groundwater, Soil

Phases	Start	End
PA.....	197607.....	198105
SI.....	198707.....	198906
RI/FS.....	199502.....	201209
RD.....	200604.....	201209
RA(C).....	200604.....	201209
LTM.....	201209.....	202709

RIP Date: N/A

RC Date: 201209

SITE DESCRIPTION

This site consists of Building 221, an explosives inspection and machining facility; Building 223, a former explosives inspection and machining facility, and Building 225, an explosives machining and light assembly facility. From the 1940s to the 1970s, pilot-scale explosive unit machining and packout operations occurred at Building 221. Other activities conducted at the building include explosive unit testing, inspection, and storage. Materials used at Building 221 are limited to explosives, radioactive materials, and small amounts of solvents and propellants. Former Building 223 is believed to have performed similar operations.

Specific operations conducted at Building 225 include solid explosives or propellant cutting, drilling, and pressing. Wastewater is conveyed by floor drains to a collection tank in Building 225. From the collection tank, the wastewater flowed along a trough to a filter, finally discharging to BSB. The wastewater was managed in this way until 1983. Currently, the wastewater is shipped to Building 809 for treatment and off-site disposal.

An internal investigation, undertaken in 1988, identified elevated levels of explosives in surface soil along the wastewater conveyance trough and near the discharge point to BSB. In 1991 a RCRA closure was performed on a 4,000-gallon AST located in a concrete vault in the basement of Building 225. Sludge and explosives-contaminated wastewater were removed from the tank and disposed of off-site. The concrete vault, tank, and basement area were subsequently decontaminated. Soil samples collected, downgradient of the tank, contained VOCs and metals above LOCs. The NJDEP reported that the subject area requires further action. In 1993 facility-wide testing of over 1,000 machines identified PCBs in a milling machine located in Building 225. The RI performed in 1996 involved the performance of a radiological survey, installation of monitoring wells, and collection of soil and groundwater samples. No soil samples collected during the radiological survey contained levels of radionuclides in excess of LOCs. Explosives were detected in the groundwater, downgradient of the buildings, at concentrations exceeding LOCs. SVOCs, PCBs, and arsenic concentrations were identified above LOCs in the soil samples.

Additional RI sampling completed in 2000 helped to delineate the extent of the PCBs in soil and RDX in the groundwater. Results of the HHRA indicated that risk and hazard exposure to surface soil are above the target risk levels of 1x10⁻⁴ and the target hazard level of one.

The FS was submitted to the regulators in December 2009. The site is addressed under the ARCADIS PBC.

In 2003, PICA-123, PICA-124, PICA-125, PICA-126, PICA-127, PICA-128, PICA-129, PICA-130, PICA-131, PICA-132, and PICA-134 were listed as RC in the AEDB-R and will be addressed under PICA-091.

PICA Site 91 now represents funding associated with former sites PICA-127, PICA-128, PICA-130, PICA-123, PICA-124, PICA-129, PICA-131, PICA-125, PICA-126, and PICA-132.

Site ID: PICA-091

Site Name: BLDGS IN 200-AREA

CLEANUP/EXIT STRATEGY

An FS to include a PP and a ROD will be completed. The combination of the vegetative cover and ICs used at PICA-096 is assumed to be the remedy for this site. The site is included in the PBC.

PICA-124, PICA-125, PICA-126, PICA-127, PICA-128, PICA-129, PICA-130, PICA-132, and PICA-134 are considered RC.

At PICA-123, PICA-124, PICA-125, PICA-127, PICA-128, PICA-129, PICA-130, and PICA-132, LUCs will be implemented.

LTM costs are included in the site-wide PBC.

PICA-091 Maps and Photos

PICA-091
BUILDINGS IN 200-AREA



Site Name: WASTE BURIAL AREA NEAR SITES 19&34(180)

STATUS

Regulatory Driver: CERCLA

RRSE: HIGH

Contaminants of Concern: Dioxins/Dibenzofurans, Metals, Munitions and explosives of concern (MEC), Other (Base Neutral Acid), Polychlorinated Biphenyls (PCB), Semi-volatiles (SVOC), Volatiles (VOC)

Media of Concern: Sediment, Soil, Surface Water

Phases	Start	End
PA.....	197607.....	198105
SI.....	198707.....	198906
RI/FS.....	199309.....	200708
RD.....	200604.....	200709
RA(C).....	200604.....	200709
LTM.....	200710.....	202109

RIP Date: N/A

RC Date: 200709

SITE DESCRIPTION

The waste burial area is situated in a low marshy area formerly containing several debris piles of drums, concrete rubble, scrap, metal, lumber, railroad ties, and trees. A drainage ditch discharges to the southeast corner of the site, causing localized ponding and marshy conditions. Extensive landfilling operations have taken place in this portion of Area C over the years. Materials were disposed of in large burial pits and in surface piles. The proximity of Site 180 to the burning ground made it a convenient location to dispose of/store items that could not be burned or did not require burning. Since this was an unregulated disposal site, the years of operation are unknown. Most disposal activities are believed to have taken place in the 1960s and 1970s.

The site was the subject of an RI in 1994. As part of the RI a geophysical survey was conducted, surface, subsurface soil, surface water, sediment, and groundwater samples were collected. All samples were analyzed for VOCs, SVOCs, metals, explosives, PCBs, dioxins/furans, and gross alpha, gross beta, and gamma radiation. The geophysical survey did not identify any burial areas. Other results indicated that LOCs were exceeded for BNAs in soil and sediment, metals in surface water and sediment and metals and dioxin in groundwater.

The HHRA determined that cancer risk was in the range of 1x10(-4) to 1x10(-6). As part of an extensive trenching investigation in 1998, additional soil, sediment, and surface water samples were collected and analyzed for VOCs, SVOCs, metals, pesticides, explosives, dioxins/furans, and PCBs. During this investigation, SVOCs, metals, and PCBs were occasionally detected in surface soil above the LOC and carbon tetrachloride was detected above the LOC in one subsurface soil sample. The trenching investigation also removed some debris piles and asbestos found at the site and restored native vegetation to the area. During trenching investigation, live 90 millimeter (mm) grenades were discovered buried at the site. The site was also the subject of a risk management evaluation that recommended an FS for mitigation of human health risk and no action for ecological concerns. HHRA found risk within the 1X10(-4) to 1X10(-6) risk range and non-cancer HI below one. Impacts to groundwater will be covered under an area-wide action addressed in PICA-206.

On Dec. 17, 2006 a PP that includes institutional and engineering controls was approved by the USEPA and the NJDEP. A ROD was signed by the Army and the USEPA by September 2007. An RD was approved by the USEPA in October 2007. The site is addressed by the ARCADIS PBC.

LUCs have been implemented. Certifications have been submitted annually.

CLEANUP/EXIT STRATEGY

LUCs will be maintained as described in the approved RD.

LTM costs are included in the site-wide PBC.

Site Name: BLDG 22,PRECISION MACHINE SHOP(SITE 117)

STATUS

Regulatory Driver: CERCLA

RRSE: MEDIUM

Contaminants of Concern: Metals, Pesticides, Polychlorinated Biphenyls (PCB), Volatiles (VOC)

Media of Concern: Sediment, Soil

Phases	Start	End
PA.....	197607.....	198105
SI.....	198707.....	198906
RI/FS.....	199309.....	201009
LTM.....	201010.....	202109

RIP Date: N/A

RC Date: 201009

SITE DESCRIPTION

This is the consolidated site that includes all the sites in the 25-site FS.

Building 22 is a one-story, 4,220 square-foot structure, which was constructed in 1918 as a precision machine shop. Over the years, various activities conducted at Building 22 included machining of depleted uranium (DU) and machining of other metals (e.g., aluminum and copper) to manufacture appurtenances for anti-tank weapons, rocket launchers, and explosive anti-tank shells. Precision machining activities were conducted at Building 22 until 1988. Since 1988, Building 22 has not housed any manufacturing operation or been used for any other purpose. Reportedly, Building 22 was cleaned after precision-machining activities had ceased.

The site underwent an RI in 1994 that included a radiological survey and the collection of surface soil samples for VOCs, SVOCs, metals/cyanide, explosives, pesticide/PCBs, uranium and gross alpha, beta and gamma radiation. The only LOC exceedances were for beryllium in surface soil. The radiological survey did not identify any AOCs. In 2000, a risk management plan was written to evaluate human health and ecological risk and determine the best path forward. The HHRA determined that risks for three modeled receptor populations were between 1X10(-4) and 1X10(-6). Hazard indices were below one for two populations and exactly one for the third population. ERA work included terrestrial receptor modeling, earthworm studies, plant studies, mammal trapping, mammal community assessments, and tissue analyses. The conclusion was that although the site currently has low habitat value, the site could pose risks that are sufficiently elevated to warrant risk management attention, if impacted portions are allowed to return to more attractive habitat. The risk management evaluation determined that it was not in the best interest of the site to actively remediate the site for ecological concerns; however, the site should proceed to FS for human health concerns.

In 2005, PICA-029, PICA-053, PICA-069, PICA-094, PICA-098, PICA-101, PICA-114, PICA-158, PICA-161, PICA-176, PICA-177, PICA-183, PICA-190, and PICA-207 were listed as RC in the AEDB-R and will be addressed under PICA-096. The draft FS for PICA-029, PICA-053, PICA-069, PICA-161, and PICA-096 was tentatively approved by the regulators; however, the resubmittal of the document is awaiting the submittal to and approval by the regulators of the additional characterization study of PICA-208 (the dog pound area).

Potential groundwater contamination associated with the site is being addressed under PICA-076.

The FS was resubmitted to the regulators in spring 2009.

CLEANUP/EXIT STRATEGY

A PP and a ROD will be completed.

LUCs will be implemented as appropriate for PICA-029, PICA-053, PICA-069, PICA-094, PICA-096, PICA-098, PICA-101, PICA-114, PICA-158, PICA-161, PICA-176, PICA-177, PICA-183, PICA-190 and PICA-207.

Site Name: BLD 41, PESTICIDE STR & FORM OIL/W SEP

STATUS

Regulatory Driver: CERCLA
RRSE: MEDIUM
Contaminants of Concern: Metals, Pesticides, Polychlorinated Biphenyls (PCB), Volatiles (VOC)
Media of Concern: Sediment, Soil

Phases	Start	End
PA.....	197607.....	198105
SI.....	198707.....	198906
RI/FS.....	199309.....	201209
RD.....	200709.....	201209
RA(C).....	200709.....	201209
LTM.....	201209.....	202109
RIP Date:	N/A	
RC Date:	201209	

SITE DESCRIPTION

Building 41 is located in the middle of the Golf Course. Prior to 1964 it was used for storage. In 1964, this building was reassigned for storage of fertilizer, lime and miscellaneous inert materials. Since then, the building has been predominantly used for storage of pesticides and herbicides that are applied on the golf course and lawn surrounding the site. Until 1988, it was a common occurrence for open bags of pesticides and herbicides, stored at Building 41, to leak onto the wooden floor due to a leaky roof.

Groundwater samples collected from site monitoring wells have consistently contained elevated levels of TCE and PCE. Groundwater at this site is covered under the Area D groundwater operable unit. During the phase I RI, metals were detected at concentrations in excess of their respective LOCs in surface soil samples. Sediment samples from the oil/water separator pond contained elevated levels of metals, cyanide, DDT, and PCBs. Sediment within the oil water separator pond is covered under the GPB/ROD. The phase I ERA concluded that this site poses virtually no risk because the contaminant levels are too low, and the area is spatially insignificant; however, earthworm toxicity testing did indicate total mortality in one sample, probably due to pesticides. Human health risk falls within or below the target range 1X10(-4) to 1X10(-6). The HI exceeds the target level of one, primarily due to manganese and thallium. The adult lead model results indicate lead in soil may be a potential health concern. Additional RI sampling conducted in 2000 delineated the extent of most metals in the soil, but the delineation for arsenic, which is believed to be related to pesticide use on the golf course, is not ER,A fundable.

The site is addressed by the ARCADIS PBC. An FS that included a small excavation was submitted in September 2009.

CLEANUP/EXIT STRATEGY

An FS, a PP, and a ROD will be completed. Maintenance of existing LUCs will be recommended as the remedy for this site.

Groundwater contamination is being addressed on an area-wide basis (Area D). The site is included in the PBC.

LTM costs are included in the site-wide PBC.

PICA-097 Maps and Photos

PICA-097

BUILDING 41, PESTICIDE STORAGE & FORMER OIL/WATER SEPARATOR



Site Name: FORMER WASTE DUMP/CHEMICAL LAB

STATUS

Regulatory Driver: CERCLA
RRSE: HIGH

Phases	Start	End
PA.....	197607.....	198105
SI.....	198707.....	198906
RI/FS.....	199309.....	200809
RD.....	200604.....	200809
RA(C).....	200604.....	200809
LTM.....	200810.....	202109
RIP Date:	N/A	
RC Date:	200809	

SITE DESCRIPTION

Site 61 encompasses approximately three acres and consists of Buildings 171 and 176. Trash, including cars and unknown materials, were reportedly used to fill in the swamp area west of Buildings 171 and 176 sometime prior to 1960. Building 171 was constructed in 1948 on what was originally the site of high explosives magazine No. 2. Since its construction, Building 171 has been used as an administrative building containing a graphics department, which included photo processing units. A RCRA closure plan was prepared for the photographic processing. The facility was to have been closed; however, the closure plan was never implemented because the building was renovated. The NJDEP considers the renovation work to have completed closure of Building 171. Building 176 was constructed in 1944 for storage of laboratory equipment and sampling of ammunition. In 1959, Building 176 was converted to a plastics information center and later converted to an administrative building.

The site underwent an RI in 1994 consisting of a geophysical survey, test pits, radiological survey, surface soil, surface water, sediment sampling for VOCs, BNAs, metals, cyanide, explosives, and pesticide/PCBs. BNAs and metals were detected above LOC in surface soil and sediment. The phase I RI recommended that this site proceed to FS; however, additional RI work was completed in 1997 based upon regulatory comment. This RI consisted of test pits, the collection of subsurface soil, surface soil, surface water and sediment for VOCs, SVOCs, pesticide/PCBs, and metals. The risk management plan in 2000 determined that human health risk was within the 1x10(-4) to 1x10(-6) range for all three receptor populations. Two of three hazard indices were greater than one. Elevated hazard indices were largely caused by inhalation of manganese. An ERA was performed, including terrestrial receptor modeling, earthworm bioassays, plan/mammal community assessments, and tissue sample analyses. The risk management decision was that the overall weight of evidence indicated that current conditions potentially posed ecological risk. The recommendation was for risk management attention or monitoring to be decided in an FS. The FS was submitted to regulators in August 2004. The FS evaluated ICs, removal, and capping as remedial alternatives.

The FS for the site was completed in 2004. Metals contaminated soil was found between PICA-102 (Site 61) and PICA-103 (Site 104). Therefore, to address all contamination at PICA 102, PICA-103 and within the stream between the two sites, an FS was written to address all of the contamination. The FS included all media at these sites with the exception of groundwater. Groundwater is being addressed under PICA-204.

In 2003 PICA-103 was listed as RC in AEDB-R and will be addressed under PICA-102. PICA Site 102 now represents funding associated with former site 103.

The ROD, RD, and implementation were all completed in FY08. The site is part of the ARCADIS PBC. Annual certification reports are submitted daily.

CLEANUP/EXIT STRATEGY

LTM at the site will be continued. Costs are captured under the PBC.

STATUS

Regulatory Driver: CERCLA

RRSE: MEDIUM

Contaminants of Concern: Explosives, Metals, Polychlorinated Biphenyls (PCB), Polycyclic Aromatic Hydrocarbons (PAH), Volatiles (VOC)

Media of Concern: Groundwater, Sediment, Soil, Surface Water

Phases	Start	End
PA.....	197607.....	198105
SI.....	198707.....	198906
RI/FS.....	199309.....	201209
RD.....	200604.....	201209
RA(C).....	200604.....	201209
LTM.....	201210.....	202109
RIP Date:	N/A	
RC Date:	201209	

SITE DESCRIPTION

This site consists of Building 424 and the surrounding area. Building 424 was constructed in 1903 as a HEs plant. As a HEs plant, operations at Building 424 involved the use of a NC-based slurry. After production of explosives ceased, all production equipment was removed, except for the neutralization and acid tanks. The building was then used as a grains-dimensioning laboratory and as a storage facility. Recently, Building 424 was used for nitration and testing of combustible cartridge cases. The building is currently inactive.

According to a 1964 Directorate of Engineering and Housing (DEH) engineering drawing (DP-141463), a sump was located inside Building 424 and was used for the collection of overflow production water. The sump discharged to the marsh area southwest of the building via an open trough and a small outfall ditch. The ditch, located to the south of Building 423, is associated with the open trench portion of the GCL, which received liquid waste containing NC, referred to as guncotton.

Soil samples collected during the phase I RI detected concentrations of PAHs, metals, and PCBs in excess of LOCs. Surface water samples collected from the marsh detected LOC exceedances for metals. Corresponding sediment samples contained elevated levels of PAHs and metals. The VOC, methylene chloride, and several metals were detected at concentrations in excess of LOCs in the groundwater samples. Human health risk falls within the target range 1X10(-4) to 1X10(-6). The HI exceeds the target level of one. Mercury was identified as the primary hazard driver in soil, sediment, and surface water. Results of the adult lead model indicated lead show a potential health risk in the soil. The phase I ERA concluded that this site poses a high risk to certain avian species and terrestrial invertebrates. Based on the results of the phase I ERA, an additional ecological investigation was conducted at the site in spring and summer 2005. Though the food web exposure models indicated that adverse effects to terrestrial receptors could occur given sufficient exposure to site COPECs, the field investigations and RSA results indicated that affects, if any, were not impacting the local populations of small mammals or birds. For aquatic receptors, the results of the lines of investigation (i.e., vegetation and benthic surveys) provided sufficient weight-of-evidence to suggest that the aquatic ecosystems at the site are not adversely affected due to the presence of site-related COPECs in the sediment or surface water.

During the phase II RI, sediment samples from the drainage ditch contained elevated levels of several explosive compounds and metals. In order to delineate the existing contamination, and investigate other potential sources at the site, additional samples were collected in 2000 and 2001.

Based on the results of these samples, and a recommendation from the NJDEP, one monitoring well was installed to determine the impact of lead contamination in the soil on groundwater quality at the site. Lead was not detected in the groundwater sample. In 2006 this same well was sampled to determine the impact of the explosives contamination in the ditch on the groundwater quality downgradient of the ditch. Explosives concentrations in excess of LOCs were not detected.

Between June and September 2004 the neutralization tank and approximately 94 cy of soil were removed from the southern corner of Building 424. Additionally, approximately 1,759 gallons of water within the neutralization tank were drained, sampled, and disposed of off-site as nonhazardous waste. Post-excavation samples indicated lead and SVOC concentrations were below LOCs. NC was identified at a final concentration of 9.3 mg/kg.

Site ID: PICA-108
Site Name: BLDGS in 400/300 AREA

The site is being addressed by the ARCADIS PBC. The FS with this site was submitted in December 2009.

In 2003 PICA-104, PICA-107, PICA-109, PICA-138, PICA-147, and PICA-210 were listed as RC in the AEDB-R and will be addressed under PICA-108.

The ERA was being performed at PICA-104, PICA-107, and PICA-108.

CLEANUP/EXIT STRATEGY

An FS, a PP, and a ROD will be completed.

LUCs are assumed to be the remedy for PICA-104, PICA-107, PICA-108, PICA-109, PICA-138, and PICA-147. Maintenance of the existing engineering cover at PICA-104, PICA-109, PICA-138, and PICA-147 will be performed. The site is included in the PBC.

NFA is recommended for PICA-210.

LTM costs are included in the site-wide PBC.

PICA-108 Maps and Photos

PICA-108
BUILDINGS IN 400/300 AREA



Site Name: FORMER BLDG 435, PROPELLANT SOLV MIXING

STATUS

Regulatory Driver: CERCLA
 RRSE: MEDIUM
 Contaminants of Concern: Metals, Perchlorate
 Media of Concern: Groundwater, Soil

Phases	Start	End
PA.....	197607.....	198105
SI.....	198707.....	198906
RI/FS.....	199309.....	201209
RD.....	201012.....	201209
IRA.....	200308.....	200410
RA(C).....	201101.....	201209
LTM.....	201209.....	202109
RIP Date:	N/A	
RC Date:	201209	

SITE DESCRIPTION

This site, which is not included in the PBC, consists of former Building 435 and the surrounding area. Building 435 was constructed in 1918. Information regarding the use of Building 435 between 1918 and 1950 was unavailable. In the early-1950s, the building was used for pulverizing operations in the preparation of experimental propellants. The activities involved the mixing of potassium nitrate with sulfur and charcoal to form black powder. Potassium perchlorate was then mixed with the black powder to make a detonating agent. Pulverizing operations at Building 435 ceased in 1976. The building was subsequently used to mix solvents for propellant production. The 1991 ANL RI concept plan indicated that ethyl acetate and acetone were potentially used in Building 435. No information was available on when solvent mixing operations were discontinued. Building 435 was demolished under TECUP in September 2000.

A RCRA closure was performed at Building 435 in 1991. Two surface soil samples were collected outside the building. The analytical results indicated that copper was the only compound detected above its LOC. In a December 1992 correspondence to PTA, the NJDEP stated that the closure was incomplete and would require further investigation under CERCLA. In order to delineate the extent of soil contamination at this site, four soil samples were collected in 2000. No LOC exceedances were identified in the soil samples. A very high lead concentration was detected in the sediment sample collected from the seep vat. Metals and perchlorate were detected at concentrations exceeding LOCs in the groundwater sample. Lead and perchlorate (600 ppb) contamination was delineated in 2001. Estimated cancer risks are below or within the USEPA's target range of 1×10^{-4} to 1×10^{-6} for all exposure scenarios. The estimated non-cancer hazards are all below the USEPA's target threshold of one; however, results of the site-specific lead exposure assessment indicated lead poses a health risk. Based on comments from the USEPA, an additional risk assessment was performed in FY08 regarding military residents only. A SLERA was conducted for this site in the spring/summer 2005. With the removal of the lead contamination (as noted below), the only apparent contamination at the site is perchlorate in groundwater. However, samples collected in August 2006 showed the levels of perchlorate at non-detectable levels from the three monitoring wells located at the site. Samples collected in November 2008 showed levels of perchlorate [7.1 micrograms per liter (ug/L)] above the LOC of five ug/L. Sampling in July 2009 showed no exceedances of perchlorate. Coupled with decreasing results in the past, these results indicate that perchlorate is naturally attenuating. Samples from GPB, the potential discharge point for groundwater have not contained detectable levels of perchlorate in the surface water. Thus, there is no complete exposure pathway for ecological receptors from groundwater or GPB, and further ecological investigation is not warranted.

An IRA for lead was conducted between May and June 2004 as part of the facility-wide lead removal investigation. Approximately 15 cy of soil were removed from the site of the former wooden seep vat and trough. Post-excavation results did not identify any lead concentrations above the LOC.

In 2003 PICA-106, PICA-113, PICA-115, PICA-144, and PICA-203 were listed as RC in the AEDB-R and will be addressed under PICA-111.

An FS was submitted in December 2007 recommending LUCs for soils. The FS was finalized in February 2010 in accordance

Site ID: PICA-111

Site Name: FORMER BLDG 435, PROPELLANT SOLV MIXING

with the USEPA and the NJDEP comments. A PP was submitted in spring 2010.

CLEANUP/EXIT STRATEGY

A PP and a ROD are currently being prepared for PICA-111. LUCs are recommended for soil and long-term monitoring of groundwater is being recommended for PICA-111.

PICA-111 Maps and Photos

PICA-111
FORMER BUILDINGG 435,PROPELLANT SOLVENT MIXING



Site Name: PROPELLANT TESTING (BLDG 197) SITE 126

STATUS

Regulatory Driver: CERCLA
RRSE: MEDIUM
Contaminants of Concern: Metals
Media of Concern: Soil

Phases	Start	End
PA.....	197607.....	198105
SI.....	198910.....	199103
RI/FS.....	199309.....	201209
LTM.....	201210.....	202109
RIP Date:	N/A	
RC Date:	201209	

SITE DESCRIPTION

Building 197 is in an area of PTA used for chemistry and other testing laboratories. The building was constructed in 1942 for surveillance testing. The building is now used for propellant testing, which is conducted in a conditioning chamber in the building. The building had an explosives allowance for up to five pounds of explosives.

The phase I RI conducted in 1994 included the collection of surface soil samples for analysis of VOCs, BNAs, metals, cyanide, explosives, and pesticide/PCBs. Metals were detected in exceedance of LOC. In 2000 and 2001, additional investigation was performed for the phase I 2A-3A Sites RI. This investigation consisted of the collection of surface and subsurface soil for arsenic, copper, and cadmium in soil. The phase I ERA concluded that neither the small mammal studies, nor the earthworm toxicity studies found any significant impacts in this area.

Estimated risks for the realistic exposure scenarios are within or below the USEPA's target range of 1x10(-4) to 1x10(-6). The estimated hazards for the construction worker exceed the target threshold of one. The primary risk and hazard drivers are arsenic and cadmium in soil.

The site is addressed by the ARCADIS PBC. An FS (the 45-site FS) with this site was submitted in December 2009.

CLEANUP/EXIT STRATEGY

An FS to include a PP and a ROD will be completed. Maintenance of LUCs will be recommended as the remedy for this site.

LTM costs are included in the site-wide PBC.

PICA-122 Maps and Photos

PICA-122

PROPELLANT TESTING (BLDG 197) SITE 126



STATUS

Regulatory Driver: CERCLA

RRSE: LOW

Contaminants of Concern: Metals, Polycyclic Aromatic Hydrocarbons (PAH)

Media of Concern: Soil

Phases	Start	End
PA.....	197607.....	198105
SI.....	198910.....	199103
RI/FS.....	199502.....	201209
LTM.....	201210.....	202109

RIP Date: N/A

RC Date: 201209

SITE DESCRIPTION

This site consists of Building 3028, a R&D laboratory, and Building 3029, a general purpose warehouse. Building 3028 operated as a supply-storehouse until 1980. Between 1980 and 1982, the building was renovated to be used as laboratories and offices. Use of the R&D laboratories began in 1982. Building 3028 is currently used as an explosive chemistry laboratory. The transformer, located on the western side of Building 3028, had an Aroclor-1260 concentration of 194 parts per million (ppm). The transformer was removed.

Mercury vapor was discovered in one of the laboratories during air sampling in 1990. The mercury was suspected to have come from damaged test equipment. The mercury contamination was remediated. Small amounts of mercury may have also gone down sink and floor drains, as a result of periodic mercury spills that occurred during routine laboratory activities. Radioactive material and equipment with radioactive sources were periodically used in the building. All radioactive materials have reportedly been removed from the building. In 1991 a RCRA closure was performed for specific laboratory areas inside Building 3028. As part of the closure, the designated areas were cleaned. In 1992 the NJDEP approved the closure. Building 3029 is connected to the north end of Building 3028. The currently vacant building once operated as an unofficial warehouse for storage of chemicals and equipment used in Building 3028. In 1991 a RCRA closure was performed to remove chemicals and equipment from the building. The building was demolished and a surveillance facility was constructed in its place. A clean closure was approved by the NJDEP in 1992.

Phase II RI activities were conducted in 1996. The radiological survey detected two samples with radiological concentrations above LOCs. During the RI, beryllium and PAHs were detected above LOCs in soil. Results of an HHRA indicated that the risks and hazard indices associated with exposure to soil at the site do not exceed the target levels. In response to regulatory comments on the RI report, one soil sample was collected for PAHs during additional RI activities in 2001. No exceedances of PAH LOCs were reported in the sample. No further sampling is proposed.

In 2003 PICA-012 and PICA-018 were listed as RC in the AEDB-R and will be addressed under PICA-134.

PICA-134 now represents funding associated with former sites PICA-012 and PICA-018.

An FS with this site (the 45-site FS) was submitted in December 2009. This site is addressed by the ARCADIS PBC.

CLEANUP/EXIT STRATEGY

An FS, a PP and a ROD will be completed. LUCs are expected at PICA-012, PICA-018 and PICA-134. The site is included in the PBC.

LTM costs are included in the site-wide PBC.

STATUS

Regulatory Driver: CERCLA

RRSE: LOW

Contaminants of Concern: Metals, Polycyclic Aromatic Hydrocarbons (PAH)

Media of Concern: Soil

Phases	Start	End
PA.....	197607.....	198105
SI.....	198910.....	199103
RI/FS.....	199502.....	201209
LTM.....	201210.....	202109

RIP Date: N/A

RC Date: 201209

SITE DESCRIPTION

Building 910 was constructed in 1950 for use as a storage magazine. The building, located on the northwestern shore of Picatinny Lake, was utilized until the 1970s for the environmental testing of munitions, to determine the effect of temperature and humidity on propellants and explosives. As of 1991, the building was empty except for five walk-in ovens used for drying propellants and explosives.

In 1991 RCRA closure activities were performed at Building 910 by washing down the walls and walk-in areas, and removing any remaining debris. The subject area received a clean closure from the NJDEP in 1992. The RI conducted at the site in 1996 included the collection of soil, groundwater, and sediment samples. Analytical results identified PAHs and metals in the surface soil, as well as metals in the sediment at concentrations in excess of their respective LOCs.

In response to regulatory comments on the RI report, additional soil samples were collected in 2001 to delineate the extent of soil contamination. Based on these results, the PAH contamination has been delineated. One additional sample, collected in 2002, completed the arsenic delineation. Results of a HHRA for soil, sediment and surface water exposures at the site indicated that the risks and hazard indices are below the target levels of 1X10(-4) and one, respectively. An FS will be necessary to address soil contamination above LOCs. ICs will be considered as a potential remedy. The sediment contamination will be evaluated as part of site PICA-057 (Picatinny Lake).

In 2003 PICA-137, PICA-153, and PICA-154 were listed as RC in the AEDB-R and will be addressed under PICA-135.

PICA-135 now represents funding associated with former sites PICA-137, PICA-153, and PICA-154.

The site is addressed by the ARCADIS PBC. An FS (the 45-site FS) was submitted in December 2009.

CLEANUP/EXIT STRATEGY

NFA is proposed for PICA-153. Surface water and sediment contamination identified at the site will be addressed as part of Picatinny Lake (PICA-057).

An FS to include a PP and a ROD will be completed for the other sites. A combination of existing LUCs will be recommended as a remedy for the sites. The site is included in the PBC. LTM costs are included in the site-wide PBC.

PICA-135 Maps and Photos

PICA-135
BUILDINGS IN THE 900-AREA



Site Name: HIGH PRESSURE BOILER (BLDG 3013) SITE 79

STATUS

Regulatory Driver: CERCLA

RRSE: MEDIUM

Contaminants of Concern: Metals, Petroleum, Oil and Lubricants (POL), Polycyclic Aromatic Hydrocarbons (PAH), Semi-volatiles (SVOC), Volatiles (VOC)

Media of Concern: Groundwater, Soil

Phases	Start	End
PA.....	197607.....	198105
SI.....	198910.....	199103
RI/FS.....	199502.....	201209
IRA.....	199001.....	199208
LTM.....	201210.....	202109

RIP Date: N/A

RC Date: 201209

SITE DESCRIPTION

Built in 1901, Building 3013 was originally used as a main boiler house, but is currently used as an auxiliary boiler house. The building was also used to produce explosives during WWI and WWII, and was expanded in the 1940s to include a water treatment system. In 1967, two 20,000-gallon USTs were installed for storage of fuel oil for the boiler. These USTs were in service until their removal in 1990. Discolored soil was noted after the tanks were removed. Building 3013 is currently inactive.

In 1991 a RCRA closure was performed that included removing waste material from the building, and decontaminating the waste storage area, in the westernmost corner of the building. In 1992 the NJDEP approved the closure area. As a result of the identification of discolored soil during the removal of the two USTs, about 1,500 tons of contaminated soil was removed from a 15 foot deep excavation. Elevated levels of TPH were detected in the soil samples; VOCs and SVOCs were detected in the groundwater. In response to recommendations from the previously mentioned investigation, additional soil and groundwater samples were collected in 1994 to better define the contamination near the former USTs. No contaminant concentrations were reported above LOCs.

Phase II RI activities were conducted at the site in 1996. During the RI, TPHs were detected at high levels in three wells. Lead was reported at concentrations above LOCs in groundwater and soil. SVOCs and arsenic were also detected at concentrations in excess of LOCs in the soil. Additional investigations performed in 2000 delineated the extent of the arsenic and lead contamination in soil; however, additional samples were collected in 2001 to complete the PAH delineation in soil. The results of the HHRA indicated that the estimated cancer risk from exposure to surface soil is above the target risk level of 1x10(-4). The estimated hazard from exposure to surface soil is below the target threshold level of one. The estimated risk from exposure to subsurface soil is within the target risk range of 1x10(-4) to 1x10(-6). The hazard from subsurface soil exposure is below the target level. The adult lead model results indicate lead concentrations in surface soil are not a concern as the average lead concentration (312 mg/kg) does not exceed the lead model-derived PRGs. In 2004, additional groundwater samples did not have contamination above LOCs.

The site is addressed by the ARCADIS PBC. An FS was submitted in October 2009.

CLEANUP/EXIT STRATEGY

An FS to include a PP and a ROD will be completed. LUCs will be implemented. The site is included in the PBC.

LTM costs are included in the site-wide PBC.

Site Name: ORDNANCE FAC (BLDGS 717,722,732)SITE 108

STATUS

Regulatory Driver: CERCLA

RRSE: HIGH

Contaminants of Concern: Metals, Polychlorinated Biphenyls (PCB), Semi-volatiles (SVOC)

Media of Concern: Sediment, Soil

Phases	Start	End
PA.....	197607.....	198105
SI.....	198910.....	199103
RI/FS.....	199502.....	201009
LTM.....	201110.....	202109

RIP Date: N/A

RC Date: 201009

SITE DESCRIPTION

This large site consists of Building 717, an ordnance facility, former Building 722, a physics and flare-testing laboratory, and former Building 732, a physics laboratory and ordnance facility. All three buildings were located along the southwestern shore of Picatinny Lake. Building 717 was used as a major-caliber loading facility. In the 1980s, the building was converted to the armament research, development and engineering center (ARDEC) electromagnetic and electrothermal/chemical armament research facility. This experimental station examines physical thrusts generated by addition of high electrical current to chemical oxidizers. Building 717 is currently still used for this purpose. From WWII until the 1970s, flares were tested on a peninsula (Flare Island), approximately 300 feet northeast of Building 717. Several transformers at the site had contained PCBs. Building 722 was originally used as an office and testing laboratory, but was later converted to a flare testing facility. In 1991 Building 722 was turned over to the fire support armaments center, to support the operations of the electric gun laboratory and range in Building 717. A darkroom operating in Building 722 reportedly disposed of photographic processing chemicals down sinks and drains, which discharged to Picatinny Lake. Radiation surveys of the flare tunnel, performed because of the presence of a radiological source, indicated radiation readings above background. Building 722 was demolished under TECUP in 2004. Building 732 was used as a pyrotechnic facility. Wastewater from Building 732 was reportedly discharged to GPB. Building 732 was demolished under TECUP in 2004.

Phase II RI activities included performance of a soil-gas survey, performance of a radiological survey, installation of three monitoring wells, and the collection of soil, groundwater, surface water, sediment and sump samples. RI results have identified several AOCs at the site, including metals contamination at Flare Island, metals and mirex contamination in the catch basins and sumps of Building 732, soil contamination on the south side of Building 722, and PCB contamination near a transformer pad. Results of bioassays conducted on-site samples found significant toxicity to aquatic organisms, but no adverse effects on soil invertebrates. Additional sampling was performed in 2001 to delineate the extent of contamination at the various AOCs. The sumps at Building 732 were removed in 2003. Post-excavation sample results indicate additional soil will have to be removed adjacent to the former sumps.

As part of the Building 722 demolition, the flare tunnel clean-out sump was also removed. Approximately 2.5 cy of the soil contamination on the south side of the building were removed in 2004 prior to its demolition. The risks and hazards from exposure to Picatinny Lake surface water and sediment adjacent to the site are below the target levels of 1X10(-6) and one, respectively. Based on a 2007 re-evaluation of risks using updated dermal exposure assumptions, the risks of surface soil exposure are below the target level of 1X10(-4) and now hazard from surface soil exposure also below one.

The site is addressed by the ARCADIS PBC. An FS with this site (the ARCADIS 25-site FS) was approved in September 2009.

CLEANUP/EXIT STRATEGY

An FS to include a PP and a ROD will be completed. Implementation of LUCs along with a small soil removal of DNT-contaminated soil will be recommended. The site is included in the PBC.

Site Name: TECUP BUILDINGS SITE 178

STATUS

Regulatory Driver: CERCLA

RRSE: LOW

Contaminants of Concern: Dioxins/Dibenzofurans, Metals, Semi-volatiles (SVOC)

Media of Concern: Soil

Phases	Start	End
PA.....	197607.....	198105
SI.....	198910.....	199103
RI/FS.....	199502.....	201209
LTM.....	201210.....	202109

RIP Date: N/A

RC Date: 201209

SITE DESCRIPTION

Site 178 consists of buildings that have been demolished under TECUP which was instituted in the 1980s to safely demolish potentially contaminated buildings. The buildings were used for a variety of purposes ranging from munitions production to inert storage. The majority of the TECUP operations were performed in the 1980s. Prior to 1981, formal records of building demolition operations were not maintained. Between 1981 and 1989, approximately 145 buildings at PTA were demolished under TECUP, after being decontaminated by fire or washing. After the decontamination process, the buildings are demolished and the area graded. In the past, buildings were sometimes demolished and buried-in-place without any preparatory decontamination measures. After 1989 the frequency of TECUP operations dropped off until recently. Since 1998 TECUP operations have resumed and nearly all buildings, along the eastern shore of Picatinny Lake, have been demolished.

During the phase II RI three former building areas were investigated. Soil samples were collected at Building 269, a former primer loading facility; Building 557, a former propellant plant; and Building 565, a former propellant plant. SVOCs, dioxins and lead were detected above LOCs in the soil at these former buildings. The SVOC and dioxin concentrations may be related to the use of diesel fuel and/or treated wood to burn the buildings. Additional samples were collected at all three former building areas in 2001 to delineate the existing soil contamination. HHRAs were completed for each former building. Results of the HHRAs for each former building indicate risk and hazard levels below the target levels of 1×10^{-4} and one, respectively. Lead was not identified as a health concern in surface or subsurface soil at any of the former buildings with the exception of subsurface soil at former Building 565. Results of the ERA suggest that there is little potential risk to terrestrial species from soil exposure at the site. Additional soil sampling was conducted in 2008 to investigate 31 additional buildings affected by TECUP as requested by the NJDEP. Risk and hazard were calculated by as acceptable per this sampling. This information was incorporated into the FS (the non-lake FS) that was submitted in September 2009.

The site is being addressed by the ARCADIS PBC until ROD.

CLEANUP/EXIT STRATEGY

An FS, a PP, and a ROD will be completed. LUCs will be recommended as a remedy for this site. The site is included in the PBC through completion of the ROD. The LTM per the ROD would be completed by the next PBC contractor.

Site Name: SHELL BURIAL AREAS NEAR SITE 5

STATUS

Regulatory Driver: CERCLA

RRSE: MEDIUM

Contaminants of Concern: Metals, Semi-volatiles (SVOC), Volatiles (VOC)

Media of Concern: Groundwater, Soil

Phases	Start	End
PA.....	197607.....	198105
SI.....	198910.....	199103
RI/FS.....	199603.....	201209
LTM.....	201210.....	202109

RIP Date: N/A

RC Date: 201209

SITE DESCRIPTION

The Site 5 Shell Burial Area is located northwest of Building 3150, at the intersection of Schrader Road and Gately Road. The area is in the vicinity of an explosion crater caused by the 1926 Lake Denmark explosion. Exploded and UXO, as well as building debris from the explosion, was deposited in the crater. The 1.5 acre area, under the control of the US Naval Ammunition Depot, continued to be used as an ordnance dumping area until 1945. The area was then covered with about 20 feet of fill material, fenced, and marked with warning signs. Approximately 25 tons of debris and ordnance were deposited in both this shell burial area and the shell burial area located near Building 3100. Ordnance in the shell burial areas included: mines, depth charges, fuses, projectiles, explosives, ammunition, propellants, and possibly rocket fuels. A 1981 Installation Assessment addendum stated that the shell burial areas also contained acids, pickling liquors, cyanide, phenol, and metals.

Dames and Moore performed an SI in 1989 to investigate groundwater VOC contamination which was detected in one well installed and sampled in 1981 at Site 5A; an analysis of the groundwater for VOCs, explosives, metals, and components of solid propellants was included as part of the SI. Compounds were not detected at levels greater than LOCs during the 1989 SI. RI activities were conducted from 1998 to 2001, including the installation and sampling of groundwater monitoring wells. Groundwater, surface soil, and subsurface soil samples were analyzed for VOCs, SVOCs, explosives, metals, cyanide, and anions. Three rounds of groundwater sampling have been conducted to date at Site 5, as part of the phase III-1A RI. Cyanide and VOCs were detected at concentrations exceeding the LOC in groundwater, during the first round of sampling. One VOC (PCE) was present in excess of LOCs during the two subsequent rounds of groundwater sampling. Results of the HHRA indicated the risk and hazards from exposure, at the site, are below the target levels of 1x10(-4) and one, respectively. A BERA was performed for this site in the spring/summer of 2005. Though the food web models indicated that adverse effects on reproduction in small mammals or birds could occur given sufficient exposure to site COPECs in northeastern Area L, the field investigations and RSA results indicated that affects, if any, were not impacting the local populations of small mammals or birds.

In 2003 PICA-052 was listed as RC in the AEDB-R and will be addressed under PICA-162.

Engineering controls (limited access) have been implemented at this site to address soil contamination. The site is addressed by the ARCADIS PBC. An FS (the 45-site FS) was submitted in December 2009.

CLEANUP/EXIT STRATEGY

An FS, a PP, and a ROD will be completed. A monitoring plan will be completed. LTM is expected. LUCs will be maintained to address soil contamination.

LTM costs are included in the site-wide PBC.

PICA-162 Maps and Photos

PICA-162

SHELL BURIAL AREAS NEAR SITE 5



Site Name: Propellant/Rocket Prod 1300/1400 Area

STATUS

Regulatory Driver: CERCLA

RRSE: HIGH

Contaminants of Concern: Metals, Polychlorinated Biphenyls (PCB), Polycyclic Aromatic Hydrocarbons (PAH)

Media of Concern: Groundwater, Soil

Phases	Start	End
PA.....	197607.....	198105
SI.....	198910.....	199103
RI/FS.....	199606.....	201209
LTM.....	201210.....	202109

RIP Date: N/A

RC Date: 201209

SITE DESCRIPTION

Building 1301, constructed in 1945 and demolished in 2005, was a one-story structure consisting of eight separate one-story buildings under one continuous roof approximately one-fifth of a mile long. The individual buildings formed a propellant finishing plant and are located off of Double Base Road. Sections of Building 1301 were renovated in 1954 for the production of rocket powder and antipersonnel mines during the Korean and Vietnam wars. From approximately 1980 to 1993, portions of Building 1301 were used for the assembly/disassembly of rocket motors. Building 1301 had been inactive since. During its many uses, explosives, solvents, alcohols, paints, paint thinners, kerosene, lubricant oil, and spent fixer and developer from film processing have been used at Building 1301.

Historically, the rooms of Building 1301 were washed down daily to remove residual explosives. The wash-down water flowed into lead-lined troughs leading to lead-lined catch basins and tanks, located on the east and west sides of the building. The catch basins and tanks contained perforated metal baskets for collecting waste propellant to be disposed at the PTA Burning Ground (PICA-002). The wastewater from the catch basins and tanks discharged in the woods, west of Building 1301. In 1990, a RCRA closure was conducted for the walkway, formerly used as a temporary solvent storage area for vapor degreasing operations.

In 1996 a PA/SI was conducted for the analysis of VOCs, SVOCs, pesticides/PCBs, explosives, metals, and anions in soil and sediment. Metals, PAHs, and PCBs were detected at levels greater than LOCs in surface soil and sediment. Based upon results of the PA/SI, RI activities were conducted from 1998 to 2000. Included as parts of the RI were a soil gas survey and VOC, PAH, PCB, explosives, and metals analyses of surface soil, subsurface soil, surface water, sediment, and groundwater. Lead was detected at concentrations in excess of LOC in paint chip samples and numerous soil samples collected in the vicinity of the catch basin discharges, in the woods west of Building 1301. Results of the HHRA indicated the risks and hazards at the site are below the target risks. A BERA was conducted in the spring/summer of 2005. Though the food web models indicated that adverse effects on reproduction in small mammals or birds could occur given sufficient exposure to site COPECs in southern Area L, the field investigations and RSA results indicated that affects, if any, were not impacting the local populations of small mammals or birds. All lead-lined troughs and catch basins were removed in 2002 and lead- contaminated soil (62 cy) directly adjacent to Building 1301 was removed as part of the facility wide sump and dry well investigation. Metals-contaminated soil remains in the vicinity of the catch basin discharges in the woods west of Building 1301.

In 2003, PICA-021, PICA-168, PICA-169, PICA-172, and PICA-174 were listed as RC in the AEDB-R and will be addressed under PICA-163.

PICA Site 163 now represents funding associated with former PICA sites PICA-168, PICA-169, PICA-21, PICA-174, and PICA-172.

The site is addressed by the ARCADIS PBC. An FS with this site was approved in September 2009. A PP was submitted in January 2010.

Site ID: PICA-163

Site Name: PropelInt/Rcket Prod 1300/1400 Area

CLEANUP/EXIT STRATEGY

An FS, a PP, and a ROD LUCs are presently required.

The site is included in the PBC. LTM costs are included in the PBC site.

PICA-163 Maps and Photos

PICA-163

PROPELLANT/ROCKET PRODUCTION 1300/1400 AREA



Site Name: ORDNANCE BLDG/EXPLOSIVES PROD.

STATUS

Regulatory Driver: CERCLA

RRSE: HIGH

Contaminants of Concern: Metals, Polychlorinated Biphenyls (PCB), Polycyclic Aromatic Hydrocarbons (PAH)

Media of Concern: Soil

Phases	Start	End
PA.....	197607.....	198105
SI.....	198910.....	199103
RI/FS.....	199606.....	201209
LTM.....	201210.....	202109

RIP Date: N/A

RC Date: 201209

SITE DESCRIPTION

Site 171 consists of Buildings 3106, 3109 and 3111. All three buildings were used as magazines while under naval ownership. Currently, the buildings are used for physical and environmental testing of ordnance items.

Building 3106 was used to store magnesium powder, oxidizers, explosives, and rocket fuels. In 1964-65, Building 3106 was modified for use as an environmental test facility and is still used to evaluate packaging materials and ammunition components such as fuses. Three dry wells are located on the north side of Building 3106. Building 3109 was constructed by the Navy in 1943 as a magazine, and renovated in 1960 for use as an environmental testing facility. A 100-foot-tall drop tower (Building 3145) is located northeast of the building, and is used to test durability and performance of packaging materials, unloaded ordnance components, and similar materials. Two dry wells were associated with Building 3109, which only received steam condensate. The Navy constructed Building 3111 in 1943 for use as a smokeless powder storage building. In the early-1960s, the building was converted for use as an air gun facility, and has served that purpose since that time. Building 3111 also houses a "dynamic machine," which was designed to simulate the forces inflicted on a shell upon conventional firing. A TPH-contaminated soil removal was conducted in the early-1990s, in an area of an old oil vapor containment drum, at Building 3111.

A PA/SI was conducted in 1996. Metals and PAHs were detected in soil at concentrations exceeding the LOC. Based upon results of the PA/SI, PICA-171 was included as part of the phase III 2A/3A RI. RI activities included the analysis of surface soil, subsurface soil, and groundwater for VOCs, SVOCs, explosives, PCBs, metals, and perchlorate. Metals, PCBs and PAHs were detected at concentrations greater than LOC in surface soil, and TCE was detected in groundwater at concentrations greater than LOC. Sampling performed in 2000 and 2001 has characterized the potential sources and delineated the extent of the soil contamination. Results of a HHRA indicate the risks and hazards from soil exposure are below the target levels of 1x10(-4) and one, respectively; however, lead in the soil is a potential concern. The BERA performed in 2005 concluded that although the food web models indicated that adverse effects on reproduction in small mammals or birds could occur given sufficient exposures to site COPECs in northeastern Area L, the field investigations and RSA results indicated that affects, if any, were not impacting the local populations of small mammals or birds.

Groundwater contamination is being addressed on an area-wide basis as part of the Mid-Valley Investigation. Approximately 180 cy of metals-contaminated soil were removed in 2004. Post-excavation data indicate that elevated lead levels have been eliminated.

In 2003 PICA-173 was listed as RC in the AEDB-R and will be addressed under PICA-171.

The site is addressed by the ARCADIS PBC. An FS with this site was approved in September 2009. A PP was submitted in January 2010.

CLEANUP/EXIT STRATEGY

An FS to include a PP and a ROD will be completed. LUCs are recommended for PICA-171 and PICA 173. The site is included in

Site ID: PICA-171

Site Name: ORDNANCE BLDG/EXPLOSIVES PROD.

the PBC.

LTM costs are included in the site-wide PBC.

STATUS

Regulatory Driver: CERCLA
RRSE: MEDIUM
Contaminants of Concern: Explosives, Metals
Media of Concern: Soil

Phases	Start	End
PA.....	197607.....	198105
SI.....	198910.....	199103
RI/FS.....	199606.....	201209
LTM.....	201210.....	202109
RIP Date:	N/A	
RC Date:	201209	

SITE DESCRIPTION

Building 611, constructed in 1965, has been used for the testing of small munitions since its construction. According to an undated transformer inventory, there are three 75-KVA transformers located inside the building. The transformers are considered to be PCB transformers. According to the PTA transformer database compiled in 1988, the transformers were in fair condition at that time and contained 34 gallons of dielectric fluid.

Although little information exists regarding the testing practices at the range area, interpretation of historic maps and aerial photographs indicate that guns were placed in the area southwest of Building 611, and fired into the slug-butt near Building 611-A. The slug-butt is still on the hillside in a deteriorated condition. This range area was used from the late-1920s to the 1940s. Currently, the ground floor of Building 611 is divided into two steel-lined blast chambers and a work area. The southern blast chamber is used only for storage and parking of vehicles, while the northern blast chamber is used to test warheads, fuses, and primers. Building 611 is also equipped with a portable X-ray unit and a darkroom for the development of X-ray films. The darkroom is located on the second floor above the work area at the south end of the building. Building 611 has a RCRA-permitted satellite waste accumulation area located inside the building. Materials stored in the area include used spray paint cans, X-ray developer and fixer.

Dye tests performed in 1991 indicate that all water from Building 611, including the darkroom sink, discharges to the sanitary sewer system (Foster Wheeler, 1991). A PA/SI was conducted in 1996. Contaminants were not detected at concentrations greater than LOC. In 2000, RI sampling was performed to characterize the slug butt area and the DU test area at Building 611B. Elevated levels of metals were reported at the slug-butt; subsequent sampling has delineated the extent of the soil contamination. A monitoring well was installed in 2001, and sampled in 2002 to determine the groundwater quality downgradient of the slug-butt. Analytical results indicate the groundwater has not been impacted by the former testing operations at the site. Results of a HHRA indicate the risks and hazards from soil exposure at the site are below the target levels of 1x10(-4) and one, respectively; however, lead in the surface soil is a potential health concern.

Although several contaminants have been identified that could pose a risk to wildlife at the site if there was significant opportunity for exposure, the size of the affected area, the poor habitat (a slope littered with metallic debris and devoid of vegetation), as well as its location far from other contaminated sites within the Installation, suggest that any further ecological investigations beyond the SLERA are not warranted.

In 2003 PICA-133, PICA-178, PICA-179, and PICA-180 were listed as RC in the AEDB-R and will be addressed under PICA-175.

PICA-175 now represents funding associated with former sites PICA-133, PICA-178, PICA-179, and PICA-180. The site is addressed by the ARCADIS PBC. An FS was submitted in October 2009.

Site ID: PICA-175

Site Name: ORDNANCE BLDGS in 600-AREA

CLEANUP/EXIT STRATEGY

An FS, a PP, and a ROD will be completed. LUCs are recommended for these sites.

PICA-133, PICA-178, PICA-179, and PICA-180 are considered RC. The site is included in the PBC.

LTM costs are included in the site-wide PBC.

PICA-175 Maps and Photos

PICA-175

ORDNANCE BUILDINGS IN 600-AREA



Site Name: BUILDINGS(1600,1601,1609,1610) SITE 94

STATUS

Regulatory Driver: CERCLA
RRSE: MEDIUM
Contaminants of Concern: Metals
Media of Concern: Soil

Phases	Start	End
PA.....	197607.....	198105
SI.....	198910.....	199103
RI/FS.....	199606.....	201209
LTM.....	201210.....	202109
RIP Date:	N/A	
RC Date:	201209	

SITE DESCRIPTION

Site 94 consists of Buildings 1609 North, 1909 South, and 1610 and former Buildings 1600, 1601, and 1604. Buildings 1601 and 1604 were demolished in 2001. Building 1600 was used for explosives testing since its construction in 1949 as a test chamber until it was demolished in 2005. Until 2001, it was being used for physical testing of HEs. Building 1601 was once used for explosives testing, but since the 1970s it was used as a photographic laboratory. There was a small pit/sump that was about two by two by two feet at the northeast corner of the building.

Building 1604 was built in 1942 as a flare and pyrotechnics assembly plant and was listed as an ordnance facility in 1977; however, an extension to the north in 1949 added a plating facility. The building was inactive except for several rooms that in recent years have been used for storage. Building 1609 South was constructed in 1942 as a machine shop, while Building 1609 North was constructed in 1951 as a Physics laboratory. From 1962 until the present, Building 1609 has been used as a powder metallurgy laboratory. The installation personnel also indicated that from approximately 1970 to the mid-1980s, Building 1609 made tungsten cubes for use in the warhead of the Patriot missile. Building 1610 was constructed in 1942 as a change house and office building for workers in the 1600 Area. Change house operations were discontinued at the building around 1973. The entire building has been used as an office building for various government and private agencies.

A PA/SI was conducted in 1996. Metals were detected in soil at concentrations greater than LOC. A soil gas survey, as well as surface soil, subsurface soil, surface water, sediment, and groundwater sampling for VOCs, explosives, and metals was conducted from 1998 to 1999. Metals were detected in soil at concentrations greater than LOC. About 25 cy of metals-contaminated soil were removed from the area of the former sand basin on the south side of Building 1601. HHRA results indicate risks and hazard are within the target levels. A SLERA was conducted in 2004 and a determination was made that no further ERA is warranted due to the small size of the affected area, its location far from other contaminated sites, and the removal of metals-contaminated soil in select areas.

The site is addressed until ROD by the ARCADIS PBC. An FS was submitted in fall 2009.

CLEANUP/EXIT STRATEGY

An FS to include a PP and a ROD will be completed. LUCs are planned for the existing natural cover. The site is included in the PBC through completion of the ROD.

LTM costs are included in the site-wide PBC.

Site Name: APPLE TREES RECREATIONAL AREA

STATUS

Regulatory Driver: CERCLA
 RRSE: HIGH
 Contaminants of Concern: Metals, Pesticides
 Media of Concern: Soil

Phases	Start	End
PA.....	197607.....	198105
SI.....	199202.....	199204
RI/FS.....	199502.....	201109
LTM.....	201110.....	202109
RIP Date:	N/A	
RC Date:	201109	

SITE DESCRIPTION

This site is an apple orchard and recreational area. It is bordered to the west by Building 34 (post cafeteria), to the north and east by residences, and to the south by a parking lot. The exact age of this site is unknown; however, a 1938 PTA map indicates that the site is an apple orchard.

In 1992 the USAEHA performed a health risk assessment study at the site. As part of the study, surface soil samples were collected from the orchard and analyzed for VOCs, SVOCs, and metals. Arsenic was the only compound that exceeded its LOC. The source of the arsenic is believed to be the application of arsenic-based pesticides to control insect predation on the apples. The USAEHA concluded that arsenic concentrations in surface soil, at the apple orchard, posed a human health risk.

In 2000 an extensive soil sampling program was conducted to determine the extent of arsenic contamination at the orchard. The sampling determined that the arsenic contamination was widespread throughout the orchard; however, the contamination appears to be limited to the top one to two feet of soil, because subsurface soils (two to three feet bgs) did not contain elevated levels of arsenic. As a result, an EE/CA was prepared to provide a recommendation for a removal action at the site. The EE/CA evaluated two alternatives (a multi-layer cap and excavation with off-site disposal). The EE/CA was never implemented. Preliminary results from a phytoremediation treatability study have indicated arsenic levels in the ferns about four to seven times the levels in the soil. Results of a HHRA for industrial worker exposures indicate risk from surface soil exposure at the site exceeds the target level of 1x10⁻⁴. The hazards from surface soil exposure are below the target level of one. Risks and hazards from subsurface soil exposure are below the target levels.

In spring 2004 this site was reclassified by the Army from an apple orchard to a recreational area. In response to regulatory comments on the RI report and the reclassification of the site, additional sampling was conducted at the site in the summer of that year. Six surface soil samples were collected and analyzed for pesticides and lead.

Organochlorine pesticides [dichlorodiphenyldichloroethane (DDD), DDT, and dichlorodiphenyldichloroethene (DDE)] were detected in all six samples, but only the samples collected adjacent to the apple trees had LOC exceedances.

Based on the current use of the site as a recreational area, an HHRA was conducted for worker and residential recreational exposures. Results from the recreational HHRA indicate risks and hazards are below the target levels. Based on the results of the recreational exposure HHRAs, an FS will be prepared to evaluate remedial alternatives for the contaminated soil.

An FS was approved by the USEPA in September 2009. A PP for the site was submitted in January 2010. The site is addressed by the ARCADIS PBC.

CLEANUP/EXIT STRATEGY

An FS to include a PP and a ROD will be completed. Maintenance of LUC (i.e., maintained vegetative cover) will likely be the remedy for this site.

Site ID: PICA-192

Site Name: APPLE TREES RECREATIONAL AREA

The site is included in the PBC. LTM costs are included in the PBC site.

Site Name: GREEN POND AND BEAR SWAMP BROOK SITE 190

STATUS

Regulatory Driver: CERCLA

RRSE: HIGH

Contaminants of Concern: Metals, Pesticides, Polychlorinated Biphenyls (PCB), Polycyclic Aromatic Hydrocarbons (PAH), Semi-volatiles (SVOC)

Media of Concern: Sediment, Surface Water

Phases	Start	End
PA.....	197607.....	198105
SI.....	198910.....	199103
RI/FS.....	199309.....	200507
RD.....	200108.....	200702
IRA.....	200308.....	200410
RA(C).....	200604.....	200709
LTM.....	200710.....	202109

RIP Date: N/A

RC Date: 200709

SITE DESCRIPTION

The GPB Study area begins at the outfall of Picatinny Lake and extends to the southern installation boundary. The BSB area begins on Green Pond Mountain and extends until BSBs confluence with GPB. These two brooks are the main drainage way for the watershed on the southern portion of Picatinny. These two brooks flowed past several industrial areas that previously had surface water discharges. PICA-193 includes both study areas.

There have been numerous investigations of GPB/BSB since 1983. Investigations were carried out by the USGS (1988, 1990, and 1991), Metcalf and Eddy (1991), the USAEHA (1991), and Dames and Moore (1989). These investigations cumulatively collected over 100 surface water and sediment samples. The site underwent an RI in 1994 and 34 additional surface water/sediment samples were collected and analyzed for VOCs, BNAs, metals, cyanide, explosives, pesticides, PCBs, and TPH. A subset of these samples was analyzed for dioxins and radionuclides. The HHRA calculated a risk of 8X10(-6) for trespasser swimmers (PCBs and dioxins/furans), 2X10(-4) for fish consumers (arsenic and PCBs). The ERA determined that there did not appear to be any grossly evident contaminant related impacts, but the contaminant food chain model suggests a potential for impacts.

In 1999 an FS data gap investigation took place and an additional 13 surface water/sediment samples and 42 sediment samples were collected and analyzed for VOCs, SVOCs, pesticides, PCBs, explosives, metals, anions, and radiologicals with a smaller number of samples analyzed for dioxins. There were exceedances of VOCs, SVOCs, pesticides, PCBs, explosives, anions, and metals criteria in surface water, and VOCs, SVOCs, pesticides, PCBs, and metals criteria in sediment. Potential effect levels were calculated and based upon the number and severity of the effect level exceedances AOCs were identified and an FS was performed. The AOCs in three regions are: Region 2 - Site 52, 95, and 96 impacted with SVOCs, PCBs, and pesticides; Site 101 with copper; Region 3 - Area H containing mercury and pesticides and Area D basins containing metals, SVOCs, pesticides and PCBs; Region 4 - containing copper. The FS recommends chemical and biological monitoring for Regions 2 and 4, and excavation and off-site disposal for Region 3. The FS has been approved by the regulators. PICA-193 includes all three regions.

A PP and public meeting were completed in December 2003.

PICA-194 has been combined with PICA-193, BSB, and both are being addressed concurrently under PICA-193. Thus, PICA-194 is considered RC. Remediation of the sediment basins (as an IRA) was completed in late 2003.

The ROD for this site was signed in July 2005. An RD was submitted to the regulators in April 2006. The RD was approved in March 2007. In September 2007 900 tons of imported sediment was removed from the oil/water separator and 13 tons of impacted sediments was excavated near RI Site 34 in Region 3. The chemical and biological monitoring was also conducted in August 2007.

Site ID: PICA-193

Site Name: GREEN POND AND BEAR SWAMP BROOK SITE 190

CLEANUP/EXIT STRATEGY

The chemical and biological sampling will continue and LUCs maintained as specified in the RD.

Site Name: BLDGS IN 1400/1300/3100/1000 AREAS

STATUS

Regulatory Driver: CERCLA
RRSE: LOW
Contaminants of Concern: Volatiles (VOC)
Media of Concern: Groundwater, Soil

Phases	Start	End
PA.....	197607.....	198105
SI.....	198910.....	199103
RI/FS.....	199606.....	201209
RD.....	200604.....	201209
RA(C).....	200604.....	201209
LTM.....	201210.....	202109
RIP Date:	N/A	
RC Date:	201209	

SITE DESCRIPTION

Building 3150 is on the southeastern PTA boundary. Building 3150 was constructed in 1942 as a storage building. Currently it houses a precision machine shop (85,592 square feet) and a gymnasium (8,285 square feet). The metal fabrication machine shop, which also has a waste storage area, is at the north corner of the basement of the building.

A document review has been completed for this site to investigate the potential for impact to groundwater from the site. The document review indicated materials handled in the building included lubricating oils, metal cuttings and degreasers. This site is adjacent to Site 5 (Shell Burial Area). Chlorinated solvent contamination has been detected at Site 5, and Site 77 could be a potential upgradient source. No RI has taken place at the building.

In 2003 PICA-037, PICA-080, PICA-081, PICA-082, PICA-164, PICA-165, PICA-166, PICA-167, and PICA-170 were listed as RC in the AEDB-R and will be addressed under PICA-195.

PICA-195 now represents funding associated with former sites PICA-170, PICA-37, PICA-167, PICA-81, PICA-82, PICA-164, PICA-80, PICA-165, and PICA-166.

The site is addressed by the ARCADIS PBC until ROD. An FS was submitted in September 2009.

CLEANUP/EXIT STRATEGY

An historical records search at PICA-195 will be documented in the FS.

PICA-037, PICA-081, PICA-082, PICA-166, and PICA-170 are NFA.

This site is included in the PBC through completion of the ROD.

An FS, a PP, and a ROD will be completed and followed by LUCs for PICA-080, -164, -165, -167, and -195.

LTM costs are included in the site-wide PBC.

PICA-195 Maps and Photos

PICA-195

BUILDINGS IN 1400/1300/3100/1000 AREAS



Site Name: FORMER PISTOL RANGE DUMP&NAVY MANURE PIT

STATUS

Regulatory Driver: CERCLA

RRSE: HIGH

Contaminants of Concern: Metals, Pesticides, Polycyclic Aromatic Hydrocarbons (PAH)

Media of Concern: Soil

Phases	Start	End
PA.....	199312.....	199404
SI.....	199408.....	199509
RI/FS.....	199703.....	201209
LTM.....	201210.....	202109

RIP Date: N/A

RC Date: 201209

SITE DESCRIPTION

Site 199 consists of an abandoned pistol range and a former dumping area. The pistol range was active from approximately 1936 to 1980. This range was approved for pistol, shot gun, and tear gas rounds. The range is presently in poor condition. Building 3054 and an unnumbered building are the only two structures located at the site. Both of these shacks are wooden and presently store debris.

The area to the north of the pistol range was used as a dumping area. The former dumping area is about one acre. The former dumping area contains construction and demolition debris, as well as domestic trash. The debris consists of crushed metal drums, car parts (e.g., batteries, an engine block), glass, ceramics, terra cotta pipe, shingles, coal, construction buckets, soda cans, and solidified paint wastes. No information was available regarding the dates in which wastes were placed at the former dumping area; however, the type of trash present at the former dumping area suggests that the site was active from the 1920s to the mid-1930s, with sporadic activity as late as 1970. A 1940 naval ammunition depot map indicated that a manure pit occupied the southeastern half of Site 199.

As part of the US Army Center for Health Promotion and Preventive Medicine (USACHPPM) relative risk site evaluation (RRSE), antimony and lead were detected at concentrations greater than their respective LOCs. In order to further characterize the site, soil and groundwater samples were collected at the site in 2000. Elevated lead levels were reported in soil samples collected from the pistol range portion of the site. Elevated levels of arsenic, zinc, and PAHs were detected in the soil samples collected from the former dumping area in association with buried debris. The HHRA indicates that the risk from exposure to impacted site media is above the target risk levels, but below the target hazard level. Lead was also determined to be a health concern at the site. A reevaluation performed in 2007 for HHRA found risk to be within the USEPA target of 1X10(-4) to 1X10(-6) and non-carcinogenic hazards below one for the current and reasonably anticipated future use. The adult lead blood model was also updated to reflect current guidance and determined that lead is not a health concern at this site.

This site is addressed by the ARCADIS PBC. The FS was approved in August 2009 by the USEPA. The PP was submitted in January 2009.

CLEANUP/EXIT STRATEGY

An FS to include a PP and a ROD will be completed. LUCs are expected. The site is included in the PBC.

LTM costs are included in the site-wide PBC.

Site Name: AREA (L) OTHER BUILDINGS

STATUS

Regulatory Driver: CERCLA

RRSE: MEDIUM

Contaminants of Concern: Explosives, Metals, Polycyclic Aromatic Hydrocarbons (PAH), Volatiles (VOC)

Media of Concern: Groundwater, Sediment, Soil, Surface Water

Phases	Start	End
PA.....	199312.....	199404
SI.....	199408.....	199504
RI/FS.....	199512.....	201209
LTM.....	201209.....	202109

RIP Date: N/A

RC Date: 201209

SITE DESCRIPTION

Thirteen additional buildings in Area L are included as part of PICA-200. The following is a brief description of each building. Building 1030 was constructed in 1949 as an acid tank farm. Building 1037 was constructed in 1957 as a wastewater incinerator. Building 1038 was constructed in 1956 as a solvent storage/flammable material storehouse. Building 1090 was constructed in 1948 as an assembly and packing building. Building 1355 consists of three 4,000 gallon steel ASTs for the storage of spent nitric and sulfuric acid used in the production of nitroglycerine (NG). Building 1369 was constructed in 1948 as a glycerin heater. Building 1372 was constructed in 1948 as a change house and office for NG production operations. Building 1373-A was demolished sometime after 1987 under TECUP. The only chemical known to have been associated with Building 1373-A was acetone. Building 1414 was constructed in 1948 as a propellant dry house. Building 1414-A was constructed in 1942 as a fan house to serve the propellant dry houses (Buildings 1414 and 1415). Building 1415 was constructed in 1948 as a propellant dry house. Buildings 1414, 1414-A, and 1415 have been demolished. Building 1418 was constructed in 1942 as a storage and shipping building. Building 1437 was constructed in 1956 as a cast propellant plant.

The 7500-gallon UST, formerly located at Building 1037, was sampled in 1988 and removed in 1990. Post excavation soils analysis for TPH indicated all concentrations were below LOC. An internal tank investigation was performed in 1993 at Buildings 1030 and 1038, in which tanks at Building 1038 were sampled and analyzed for toluene and toxicity characteristics leaching procedure (TCLP) metals. Detections were not above LOC. The tanks at Building 1030 were empty so samples were not collected.

The PICA-200 buildings were included as part of the 1996 PA/SI for VOCs, SVOCs, pesticides/PCBs, explosives, metals, and anions analysis in soil. Metals were detected above LOC at Buildings 1030, 1414, 1415, and 1437. PAHs were detected at concentrations greater than LOC at Building 1414-A. Based upon results of the PA/SI, Buildings 1030, 1037, 1038, 1090, 1414, 1414-A, 1415, and 1437 were included as part of the phase III 2A/3A RI. Field activities performed in 2000 and 2001 identified metals exceedances in soil at Building 1030 and elevated levels of NC in the soil at Building 1415. The extent of this contamination has been delineated, and no further sampling is proposed.

In 2004 the stainless steel catch tank at Building 1437 was removed from the building and disposed of off-site as scrap metal.

Potential groundwater contamination is being addressed on an area-wide basis as part of the Mid-Valley investigation. HHRAs were completed for the individual buildings. Risk and hazards were below the target levels of 1x10(-4) and one for all buildings. Due to the small size of these buildings and the lack of surface soil contamination associated with these buildings, a SLERA concluded that no further ecological investigation is warranted for this site with the exception of former Building 1030. A BERA performed for former Building 1030 in 2005 included a benthic macroinvertebrate survey of Robinson Run. The results of the survey suggest that the benthic community of Robinson Run does not appear to be at any significant risk from the potential presence of contaminants from Area L sites in the surface water or sediment.

The site is addressed by the ARCADIS PBC. An FS was submitted in October 2009.

Site ID: PICA-200
Site Name: AREA (L) OTHER BUILDINGS

CLEANUP/EXIT STRATEGY

An FS, a PP, and a ROD will be completed. LUCs are expected. The site is included in the PBC.

LTM costs are included in the site-wide PBC.

STATUS

Regulatory Driver: CERCLA
RRSE: HIGH
Contaminants of Concern: Explosives, Metals, Volatiles (VOC)
Media of Concern: Groundwater

Phases	Start	End
PA.....	199309.....	199604
SI.....	199608.....	199806
RI/FS.....	199809.....	201209
RD.....	200604.....	201209
RA(C).....	200604.....	201209
LTM.....	201210.....	202109
RIP Date:	N/A	
RC Date:	201209	

SITE DESCRIPTION

The Mid-Valley region at Picatinny consists of study Areas F, G, H, and the northwestern part of Area L. In 1998 Dames and Moore completed the phase I RI, including Areas F and G, at PTA. During that investigation, several COCs were identified in the groundwater at sites within the F and G study areas. These COCs included TCE, PCE, RDX, and metals. Calculations for the hypothetical future use of groundwater by future residents and workers exceeded the carcinogenic risk criteria of 1x10(-06), and the non-carcinogenic hazard criteria of one. The phase I RI concluded that these COCs might have upgradient sources in Areas H (to the west) and L (to the east), which are impacting the groundwater in Areas F and G. Subsequent investigations have focused on the Area H and L study sites (phase II and phase III RIs, respectively); and on further characterizing the extent of contamination at the Area F and G study sites (phase I Additional RI and Areas F and G groundwater investigation). During the phase II and phase III RIs, TCE, PCE, RDX, and metals were detected at concentrations greater than LOC in groundwater in Areas H and L.

A groundwater RI was started in late 2001 to delineate the plumes. A data gap investigation was started in 2003 and completed in 2004. This investigation determined the source area for a TCE and RDX plume. The TCE plume is long and narrow and has moderate TCE exceedance conditions [TCE about 100 ug/L]. The TCE plume is over 5000 feet long. The RDX plume covers a smaller area and has concentrations of about 80 ug/L.

Although an FS was approved in 2009; additional investigation revealed higher levels of TCE contamination near Building 3109. Over 10 additional wells have been installed.

CLEANUP/EXIT STRATEGY

A PP and a ROD are required. The remediation has yet to be determined. The site is included in the PBC.

Costs are included in the site-wide PBC.

STATUS

Regulatory Driver: CERCLA
RRSE: HIGH
Contaminants of Concern: Metals, Volatiles (VOC)
Media of Concern: Groundwater

Phases	Start	End
PA.....	199309.....	199604
RI/FS.....	199608.....	200809
RD.....	200604.....	200809
RA(C).....	200604.....	200809
RA(O).....	200604.....	201509
LTM.....	201509.....	202109
RIP Date:	200809	
RC Date:	201509	

SITE DESCRIPTION

The groundwater in this area is being addressed independently of the other media. All other environmental media at this site are being addressed under PICA Site 66. There are two sites within Area B, Site 20 (a pyrotechnic range) and Site 24 (a sanitary landfill). Site 20 is located entirely within Site 24. Site 24 consists of cleared, reclaimed/filled wetlands containing several small mobile buildings/sheds, ponds, and man-made drainage ditches. The most prominent feature of Site 24 is the Landfill pond that occupies an area of approximately one acre. Documentation indicates that fly ash, ordnance, industrial waste, and sludge from the water treatment plant were reportedly disposed of at Site 24 until 1972. There is strong potential for an off-post production well to be operated nearby.

Groundwater investigation began from 1981 to 1984 when two wells were installed and sampled for VOCs and metals. A geophysical survey was performed in 1986. Three additional wells were installed and sampled for VOCs, SVOCs, metals, anions, and phenols in 1989. VOCs, metals, and anions were detected above LOCs. In 1994 the RI included geophysical, radiological, and soil gas surveys, and installation of more wells where VOCs and metals were detected above LOC. The HHRA was calculated to be above 1×10^{-4} (assuming on-site consumption of groundwater). Follow-up geoprobe investigation in 1996 and additional well installation in 1998 and 1999 were all carried out to close data gaps associated with plume delineation or potential remedial alternatives. The most recent investigation included a redox-zonation to assess the potential for MNA. All of these investigations found elevated levels of VOCs in the two uppermost aquifers.

In April 2002 an FS was submitted which examined MNA, chemical oxidation, iron slurry injection, HRC, oxygen releasing compound, and P&T. The final FS recommends expedited treatment of groundwater using HRC. Prior to this FS recommendation, the Army performed a pilot scale injection of iron slurry for chemical reduction of chlorinated organics. This work was completed in February 2002 but this process was not found to be effective at this site. An HRC pilot study was completed in fall 2004. The anticipated remedial alternative is injection of HRC or alternative amendments to try to meet cleanup standards within seven years.

The PP was finalized and the public notice completed in 2005. The ROD was submitted to the regulators in June 2008. A pilot injection test was completed in January 2007. The first quarterly amendment injection and monitoring was completed in September 2008.

This site is covered under the PBC.

CLEANUP/EXIT STRATEGY

HRC or alternative amendments will continue to be injected in the most contaminated portions of the plume. Remediation is expected to be completed within seven years. The site is included in the PBC.

Site ID: PICA-205
Site Name: AREA B GROUNDWATER

LTM costs are included in the site-wide PBC.

STATUS

Regulatory Driver: CERCLA

RRSE: MEDIUM

Contaminants of Concern: Dioxins/Dibenzofurans, Metals, Volatiles (VOC)

Media of Concern: Groundwater

Phases	Start	End
PA.....	199309.....	199604
RI/FS.....	199608.....	200909
LTM.....	200911.....	202109

RIP Date: N/A

RC Date: 200909

SITE DESCRIPTION

This site, which is not included in the PBC, is approximately 126 acres in area and is in the southwestern portion of PTA, near the southern boundary of the arsenal. The area consists of the following six study sites: Site 19 - Pyrotechnic Demonstration Area (AEDB-R No. 020), Site 23 - Post Farm Landfill (AEDB-R No. 065), Site 25 - Sanitary Landfill (AEDB-R No. 067), Site 26 - Dredge Piles from GPB (AEDB-R No. 068), Site 163 - Baseball Fields (AEDB-R No. 092), and Site 180 - Waste Burial Area (AEDBR No. 093).

PICA-206 covers all groundwater in Area C with the exception of Site 23 groundwater. Due to the geographic and elevation differences between Site 23 and all of the remaining sites in Area C, Site 23 groundwater is being addressed along with the remaining media at Site 23 (PICA- 065). There are 47 wells in Area C and there is strong potential that an off-post production well operates nearby.

An area-wide groundwater assessment was performed as part of the 1994 RI. In the RI, groundwater exceedances were found for VOCs, one SVOC, and metals. The HHRA indicated that carcinogenic risk fell between or exceeded the 1X10(-6) to 1X10(-4) range. Carcinogenic risk is primarily from carbon tetrachloride, chloroform, TCE, arsenic, beryllium, heptachlor epoxide, and dioxins/furans. In 2001, additional rounds of groundwater samples were collected for VOCs, metals, explosives, perchlorate, and dioxins. Groundwater analyses were targeted to include only previous detections. Results indicated exceedances of VOCs and metals. Additional delineation of these samples was conducted in 2002, one year of quarterly sampling was conducted for the 16 southern boundary wells between fall 2002 and summer 2003, semiannual monitoring was conducted through 2004 and semiannual monitoring has been conducted since fall 2005. An FS was completed in 2005 in which continued implementation of ICs with LTM was recommended. The FS has been approved by the regulators. The PP was public noticed in October 2007. A ROD was signed by the USEPA in September 2009.

An RD plan for LTM and ICs was finalized in November 2009. The initial semiannual groundwater sampling event for the LTM was completed in February 2010.

CLEANUP/EXIT STRATEGY

LTM is being performed at the site. LTM will include semiannual monitoring for a minimum of two years and semiannual monitoring for 28 years at 16 SB wells and 16 Area C wells, two Area C SW, LUCs, well repair and abandonment, and five-year reviews. An IRA Report will be submitted by September 2010.

Site Name: BUILDING 167, LOCOMOTIVE AREA, BLDG. 430

STATUS

Regulatory Driver: CERCLA
 RRSE: MEDIUM
 Contaminants of Concern: Metals, Petroleum, Oil and Lubricants (POL), Polycyclic Aromatic Hydrocarbons (PAH), Volatiles (VOC)
 Media of Concern: Groundwater, Sediment, Soil

Phases	Start	End
PA.....	199309.....	199604
SI.....	199608.....	199806
RI/FS.....	199809.....	201209
IRA.....	200308.....	200410
LTM.....	201210.....	202109
RIP Date:	N/A	
RC Date:	201209	

SITE DESCRIPTION

PICA-209 consists of five separate buildings (Buildings 167, 303, 426, 426A, 430) in Area F, grouped together by USACHPPM for an RRSE.

Building 167 was constructed in 1930 as an explosives prep laboratory. The building was also used as a nuclear chemical research laboratory and is currently vacant. Drums containing radionuclides were stored on the eastern side of the building. The building contained hot laboratories where sink drains, equipment drains, and floor drains were routed to collection tanks in the basement. These tanks received low-level radioactive waste and solvents. The radiation protection office tested and cleared the piping before removal in 1973. All of the tanks but one was removed at this time. No closeout or closure survey was conducted. Piping leaks were reported in the building basement.

Former Building 303, the Locomotive Area, was used to maintain all locomotives prior to 1926. The building was demolished except for the foundation and service pits that show evidence of petroleum contamination and contain coal clinkers.

Building 430 is a former propellant systems facility used to produce and test small batches of NG. Liquid wastes generated in the building were retained in lead catch tanks installed in the 1950s. Overflow from the tanks was discharged onto the soil.

Building 462A, built in 1941, was used for storage as part of the neutralizing house for the GCL. It is currently used for storage of explosives. The building contains a concrete sump, formerly used to receive wastewater from Building 462. The water was then discharged into a ditch located southwest of the building. Former Building 426 was used as a mixing house prior to its destruction during an explosion in 1945. No other information is available concerning this building.

In 1998 the USACHPPM performed an RRSE for the five buildings and storage areas associated with this site. Samples were collected at each building except former Building 426. Metals, explosives, and PAHs above LOC were detected in the soil. VOCs, explosives, and metals above LOC were identified in the groundwater. In 2000 and 2001, surface and subsurface soil was sampled for arsenic, lead, and explosives.

The analytical results have successfully delineated the extent of contamination at each building, and no further sampling is proposed. Individual HHRA were performed for the five buildings. Risks were above 1×10^{-4} at Buildings 167 and 430. Hazards were above the target levels of one at Building 430 and former Building 303. Lead was also a health concern at these two buildings. A SLERA was conducted for the five PICA-209 buildings in spring 2005. A reconnaissance visit prior to the BERA field investigations determined that construction or remediation activities north of Area F as well as the cessation of discharges from Area F buildings to this ditch had altered the expected flow patterns and the ditch was completely dry. The ditch no longer represents potential aquatic habitat. Previous sediment analytical data was regarded as surface soil data for evaluation in the Area F BERA through wildlife exposure modeling. Though the food web exposure models indicated that adverse effects on reproduction in small mammals or birds could occur given sufficient exposure to site COPECs in Area F, the field investigations and RSA results indicated that effects, if any, were not impacting the local populations of small mammals or birds.

The site is addressed by the ARCADIS PBC. An FS was submitted in December 2009.

Site ID: PICA-209

Site Name: BUILDING 167, LOCOMOTIVE AREA, BLDG. 430

A final release survey, including remediation and removal of contaminated radiological items in 2002, was performed at Building 167 by the US Army Joint Munitions Command (non-ER,A funds). Approximately 13.5 cubic feet of soil were excavated and disposed of off-site. Based on the post-excavation results, no further remediation of the radiological contamination is required. One sump, two lead catch tanks, and about 145 cy of contaminated soil (PAHs from Building 167, lead/explosives from Building 430, and lead from Buildings 303 and 430) were removed from four of the five PICA-209 buildings between December 2003 and September 2004. Additionally, three sumps at Buildings 430 and 462A were further investigated.

Groundwater contamination will be evaluated as part of the Mid-Valley investigation.

CLEANUP/EXIT STRATEGY

An FS to include a PP and a ROD will be completed.

LUCs are recommended for PICA-209. The site is included in the PBC.

Site Closeout (No Further Action) Summary

Site ID	Site Name	NFA Date	Documentation
PICA-007	INACT.ROCKET FUEL TEST G-2 AREA (SITE 1)	200306	PICA-007 was listed as response complete in AEDB-R and will be addressed as part of PICA-008.
PICA-010	BUILDING 95 FORMER WASTE IMPOUNDMENTS	200306	In 2003, PICA-010 was listed as RC in AEDB-R and will be addressed under PICA-077.
PICA-012	BLDG 3022 PHYS ANAL LAB/ENERG(SITE 83)	200306	In 2003, PICA-012 was listed as response complete in AEDB-R and will be addressed under PICA-134.
PICA-018	FLUOROCHEMICAL STRG(3045)(SITE 30)	200306	In 2003, PICA-018 was listed as response complete in AEDB-R and will be addressed under PICA-134.
PICA-021	FORMER NG PROC AREA (1361A-1364) ST 35	200306	In 2003, PICA-021 was listed as response complete in AEDB-R and will be addressed under PICA-163.
PICA-029	BUILDINGS IN 300 AREA	200506	In 2005, PICA-029 was listed as response complete in AEDB-R and will be addressed under PICA-096.
PICA-036	FORMER PROPELLANT PLANT(1010)(SITE 106)	199702	The costs for ICs for this site, although closed (RC) for years, has been integrated into the PICA- 020. It is part of the Institutional Control Record of Decision for 13 Sites.
PICA-037	FORMER HAZ WST TANK STOR(1380)(SITE 51)	200306	In 2003, PICA-037 was listed as response completed in AEDB-R and will be addressed under PICA-195.
PICA-047	STEAM POWER PLANT BLDG 506(SITE 63/65)	200306	In 2003, PICA-047 was listed as response complete in AEDB-R and will be addressed under PICA-022.
PICA-052	SHELL BURIAL AREA(NEAR B-3100)(SITE 6)	200306	In 2003, PICA-052 was listed as response complete in AEDB-R and will be addressed under PICA-162.
PICA-053	MUNITS&PROPLTS TST AREA/CHEM BURIAL	200505	In 2005, PICA-053 was listed as response complete in AEDB-R and will be addressed under PICA-096.
PICA-054	MUNITS&PROPLT TST AREA(B-1222)(SITE 8)	199702	Site is ER,A ineligible and will be covered under the CC program as CC-054.
PICA-055	MUNITS&PROPLT TEST AREA(B670,B673,B674)	200107	Active range - not eligible
PICA-056	FORMER CHEMICAL BURIAL AREA (SITE 10)	200306	In 2003, PICA-056 was listed as response complete in AEDB-R and will be addressed under PICA-053.
PICA-059	MUNITS/PYROTEC TEST AREA(B-640)(SITE 13)	199702	Active range - not eligible
PICA-060	MUNITIONS TEST AREA (B-636) SITE 14	200106	Active Site - Not ER,A eligible
PICA-061	MUNITIONS TEST AREA(B616,B654)(SITE 15)	200106	Active range - not eligible
PICA-063	PYROTECHNIC TESTING RANGE (SITE 20)	200205	PICA-063 has been combined with PICA-066, Sanitary Landfill (Site 24), and both are being addressed concurrently under PICA-066.
PICA-064	POACH HOUSE (520) (SITE 147)	200306	In 2003, PICA-064 was listed as response complete in AEDB-R and will be addressed under PICA-085.
PICA-068	DREDGE PILE (SITE 26)	199702	PICA-068 has been combined with PICA-067, Sanitary Landfill (Site 25), and both

Site Closeout (No Further Action) Summary

Site ID	Site Name	NFA Date	Documentation
			are being addressed concurrently under PICA-067.
PICA-069	PROPELLANT/CHEM/MATERIAL STORAGE	200506	In 2005, PICA-069 was listed as response complete in AEDB-R and will be addressed under PICA-096.
PICA-070	SEWAGE TRMT PLANT SLUDGE BEDS(B80)SITE28	199702	This cost for ICs for this site, although closed (RC) for years, has been integrated into the PICA- 020. It is part of the Institutional Control Record of Decision for 13 Sites.
PICA-073	BLDG 553 STORAGE TANKS(SITE 32)	200306	In 2003, PICA-073 was listed as response complete in AEDB-R and will be addressed under PICA-085.
PICA-074	BLDG 527A STORAGE TANKS (SITE 33)	200306	In 2003, PICA-074 was listed as response complete in AEDB-R and will be addressed under PICA-085.
PICA-078	VEHCL MAINT FORMER-WW PRETRTMT FAC(B-31)	200103	The site will be addressed under site PICA-084.
PICA-080	FORMER LAB PACK FAC (B-1094) SITE 41	200306	In 2003, PICA-080 was listed as response completed in AEDB-R and will be addressed under PICA-195.
PICA-081	FORMER PCB STORAGE AREA (B-3114) SITE 42	200306	In 2003, PICA-081 was listed as response completed in AEDB-R and will be addressed under PICA-195.
PICA-082	PESTICIDE STORAGE AREA (B-3157) SITE 43	200306	In 2003, PICA-082 was listed as response completed in AEDB-R and will be addressed under PICA-195.
PICA-083	Golf Course Maintenance(BLDG 39)SITE 44	200008	The cost for ICs for this site, although closed (RC) for years, have been integrated into PICA- 020. It is part of the Institutional Control Record of Decision for 13 Sites.
PICA-084	VEHICLE MAINTENANCE (BLDG 33)SITE 45	200407	In 2003, PICA-084 was listed as response complete in AEDB-R and will be addressed under PICA-071.
PICA-086	HEAVY EQUIP. MAINTENANCE(BLDG 3005&3006)	200306	In 2003, PICA-086 was listed as response completed in AEDB-R and will be addressed under PICA-075.
PICA-087	Auto Hobby Shop (BLDG 3315)- Site 48	200106	The site will be addressed under PICA-084.
PICA-088	Soldering Storage Area (BLDG 19&19A)	199706	The costs for ICs for this site, although closed (RC) for years, have been integrated into PICA- 020. It is part of the Institutional Control Record of Decision for 13 Sites.
PICA-089	PETROLEUM LEAK AREA(BLDG 305)SITE 52	200306	In 2003, PICA-089 was listed as response complete in AEDB-R and will be addressed under PICA-029.
PICA-092	BASEBALL FIELDS (SITE 163)	199702	The costs for ICs for this site, although closed (RC) for years, have been integrated into PICA-020. It is part of the Institutional Control Record of Decision for 13 Sites.
PICA-094	SURVEILLANCE LABORATORY(BLDG 92)-SITE 69	200406	In 2005, PICA-094 was listed as response complete in AEDB-R and will be

Site Closeout (No Further Action) Summary

Site ID	Site Name	NFA Date	Documentation
			addressed under PICA-096.
PICA-095	BLDG 12, PHOTO PROCESSING FAC (SITE 86)	199702	The site will be addressed under PICA-020.
PICA-098	METAL PLATING SHOP, BLDG 64 (SITE 123)	200506	In 2005, PICA-098 was listed as response complete in AEDB-R and will be addressed under PICA-096.
PICA-099	BLDG 5, ARSENAL REPRTION & TRNG OFF(182)	199702	The costs for ICs for this site, although closed (RC) for years, have been integrated into PICA- 020. It is part of the Institutional Control Record of Decision for 13 Sites.
PICA-100	GRAPHIC REPRODUCTION & TRNG BLDG 58 (183)	199702	Costs for ICs for this site, although closed (RC) for years, has been integrated into the PICA- 020. It is part of the Institutional Control Record of Decision for 13 Sites.
PICA-101	BLDG 163, PHOTOGRAPHY LAB (SITE 60)	200406	In 2005, PICA-101 was listed as response complete in AEDB-R and will be addressed under PICA-096.
PICA-103	BLDGS 161&162,CHEMICAL LAB(SITE 104)	200306	In 2003, PICA-103 was listed as response completed in AEDB-R and will be addressed under PICA-102.
PICA-104	BLDGS 454&455,PROPELLANT BAG FLG AREA	200306	In 2003, PICA-104 was listed as response complete in AEDB-R and will be addressed under PICA-108.
PICA-105	BLDG 166,PROPELLANT TEST (SITE 124)	199702	This site will be addressed under PICA-020.
PICA-106	BLDGS 172&183 & BLDGS IN 400 AREA	200306	In 2003, PICA-106 was listed as response complete in AEDB-R and will be addressed under PICA-111.
PICA-107	BLDGS 404,407,&408,CHMCL LAB&PROP PLANTS	200306	In 2003, PICA-107 was listed as response complete in AEDB-R and will be addressed under PICA-108.
PICA-109	BLDGS 427&427B,PROPELLANT PRO(SITE 140)	200306	In 2003, PICA-109, was listed as response complete in AEDB-R and will be addressed under PICA-108.
PICA-110	BLDG 429,PROPELLANT CRUSHING(SITE 141)	200008	The costs for ICs for this site, although closed (RC) for years, have been integrated into PICA- 020. It is part of the Institutional Control Record of Decision for 13 Sites.
PICA-112	BLDG 436,PROPELLANT PROCESSING(SITE 143)	199702	The costs for ICs for this site, although closed (RC) for years, have been integrated into PICA- 020. It is part of the Institutional Control Record of Decision for 13 Sites.
PICA-113	BLDG 462,PROPELLANT FINISHING (SITE 144)	200306	In 2003, PICA-113 was listed as response complete in AEDB-R and will be addressed under PICA-111.
PICA-114	BLDG 477,EXPLOSIVE&PROPELLANT MIX AREA	200506	In 2005, PICA-114 was listed as response complete in AEDB-R and will be addressed under PICA-096.
PICA-115	BLDG 497,POWDER PRESSING (SITE 146)	200306	In 2003, PICA-115 was listed as response complete in AEDB-R and will be addressed under PICA-111.

Site Closeout (No Further Action) Summary

Site ID	Site Name	NFA Date	Documentation
PICA-116	BLDGS 311&319, FORMER GAS STATION &	200306	In 2003, PICA-116 was listed as response complete in AEDB-R and will be addressed under PICA-072.
PICA-117	BLDG 302,SERVICE SHOPS (SITE 134)	200306	In 2003, PICA-117 was listed as response complete in AEDB-R and will be addressed under PICA-029.
PICA-118	METALLURGY LAB, BLDG 315 (SITE 135)	200108	The costs for ICs for this site, although closed (RC) for years, have been integrated into PICA- 020. It is part of the Institutional Control Record of Decision for 13 Sites.
PICA-119	BLDG 355,METALLURGY LAB (SITE 136)	200306	In 2003, PICA-119 was listed as response complete in AEDB-R and will be addressed under PICA-029.
PICA-120	FORMER BLDG 24 PLATING FACIL (SITE 21)	200008	The contaminated groundwater from the old Building 24 is currently being addressed as part of PICA-076; thus PICA-120 is considered response complete.
PICA-121	BUILDING 336 - EXPLOSIVE LAUNDRY	200306	In 2003, PICA-121 was listed as response complete in AEDB-R and will be addressed under PICA-029.
PICA-123	FORMER HAZ WASTE STOR/FUSE ASS(BLDG 210)	200306	In 2003, PICA-123 was listed as response complete in AEDB-R and will be addressed under PICA-091.
PICA-124	LOADING/DISASSEMBLY PLT (BLDG241)SITE 64	200306	In 2003, PICA-124 was listed as response complete in AEDB-R and will be addressed under PICA-091.
PICA-125	MINE ASSEMBLY FACILITY(BLDG 268) SITE 98	200306	In 2003, PICA-125 was listed as response complete in AEDB-R and will be addressed under PICA-091.
PICA-126	EXP LOADING FACILITY (BLDG 276) SITE 100	200306	In 2003, PICA-126 was listed as response complete in AEDB-R and will be addressed under PICA-091.
PICA-127	MELT CASTING OPERATION (BLDG 230)SITE127	200306	In 2003, PICA-127 was listed as response complete in AEDB-R and will be addressed under PICA-091.
PICA-128	EXP PRESSING PLT (BLDGS235/236) SITE 128	200306	In 2003, PICA-128 was listed as response complete in AEDB-R and will be addressed under PICA-091.
PICA-129	CHANGE HOUSE (BLDG 240) SITE 129	200306	In 2003, PICA-129 was listed as response complete in AEDB-R and will be addressed under PICA-091.
PICA-130	POWDER PRESS/PELLETING(BLDG 252)SITE 130	200306	In 2003, PICA-130 was listed as response complete in AEDB-R and will be addressed under PICA-091.
PICA-131	FORMER ORDNANACE MANUFAC. (BLDG 266)	200306	In 2003, PICA-131 was listed as response complete in AEDB-R and will be addressed under PICA-091.
PICA-132	FORMER LOAD FACILITY (BDLGS271/271I-N)	200306	In 2003, PICA-132 was listed as response complete in AEDB-R and will be addressed under PICA-091.
PICA-133	CHANGE HOUSE (BUILDING 600) SITE 151	200306	In 2003, PICA-133 was listed as response complete in AEDB-R and will be addressed under PICA-175.

Site Closeout (No Further Action) Summary

Site ID	Site Name	NFA Date	Documentation
PICA-137	XRAY PHOTOPROCESSING LAB(BLDG 908)SITE82	200306	In 2003, PICA-137 was listed as response complete in AEDB-R and will be addressed under PICA-135.
PICA-138	ELECTROMAG. GUN TEST SHED(BLDG329)SITE90	200306	In 2003, PICA-138 was listed as response complete in AEDB-R and will be addressed under PICA-108.
PICA-139	AMMUN DEMO 1 ORD FAC(BLDGS800/807)SITE93	200306	In 2003, PICA-139 was listed as response complete in AEDB-R and will be addressed under PICA-079.
PICA-140	POST ENG MAINT SHOP (BLDG 501) SITE 97	200306	In 2003, PICA-140 was listed as response complete in AEDB-R and will be addressed under PICA-085.
PICA-141	FORMER ENLISTED MENS BARRACKS(BLDG 3050	200306	In 2003, PICA-141 was listed as response completed in AEDB-R and will be addressed under PICA-075.
PICA-142	PROPELLANT PLANT (BLDG 511) SITE 105	200306	In 2003, PICA-142 was listed as response complete in AEDB-R and will be addressed under PICA-085.
PICA-144	PYROTECHNIC PLANT (BLDG 445) SITE 109	200306	In 2003, PICA-144 was listed as response complete in AEDB-R and will be addressed under PICA-111.
PICA-145	500 AREA BUILDINGS SITE 110	200306	
PICA-146	PROPELLANT PLANT (BLDG 561) SITE 113	200306	In 2003, PICA-146 was listed as response complete in AEDB-R and will be addressed under PICA-085.
PICA-147	ADMINISTRATION BLDG (BLDG 382) SITE 137	200306	In 2003, PICA-147 was listed as response complete in AEDB-R and will be addressed under PICA-108.
PICA-148	CHANGE HOUSE (BLDG 527) SITE 148	200306	In 2003, PICA-148 was listed as response complete in AEDB-R and will be addressed under PICA-085.
PICA-149	PROPELLANT PLANT (BLDG541) SITE 149	200306	In 2003, PICA-149 was listed as response complete in AEDB-R and will be addressed under PICA-085.
PICA-150	PROPELLANT PLANT (BLDG 555) SITE 150	200306	In 2003, PICA-150 was listed as response complete in AEDB-R and will be addressed under PICA-085.
PICA-151	Ordnance Bldgs 813, 816/816B	200306	In 2003, PICA-151 was listed as response complete in AEDB-R and will be addressed under PICA-079.
PICA-152	ORDNANCE FAC (BLDGS 820,823) SITE 157	200306	In 2003, PICA-152 was listed as response complete in AEDB-R and will be addressed under PICA-079.
PICA-153	HIGH-EXP MAGAZINE (BLDG 926) SITE 158	200306	In 2003, PICA-153 was listed as response complete in AEDB-R and will be addressed under PICA-135.
PICA-154	SUPPLIES & SER. BLDG (BLDG 975) SITE 159	200306	In 2003, PICA-154 was listed as response complete in AEDB-R and will be addressed under PICA-135.
PICA-156	REFRIG. & INERT GAS PLT(BLDG 523)SITE184	200306	In 2003, PICA-156 was listed as response complete in AEDB-R and will be addressed under PICA-085.
PICA-157	FORMER MOTORS/ROC FUEL TST AREA(3600)	200306	In 2003, PICA-157 was listed as response complete in AEDB-R and will be addressed as part of PICA-008.

Site Closeout (No Further Action) Summary

Site ID	Site Name	NFA Date	Documentation
PICA-158	HELICOPTER MAINTENANCE(BLDG 3801)SITE175	200506	In 2005, PICA-158 was listed as response complete in AEDB-R and will be addressed under PICA-096.
PICA-159	PARKING AREA ACROSS FROM BLDG 3328	200306	In 2003, PICA-159 was listed as response complete in AEDB-R and will be addressed under PICA-161.
PICA-160	CHEM LAB & ADMIN BLDG (BLDG 3404)SITE173	200306	In 2003, PICA-160 was listed as response complete in AEDB-R and will be addressed under PICA-161.
PICA-161	SEWAGE TRMT/CHEM LAB/FIREHOUSE/PRKG	200506	In 2005, PICA-161 was listed as response complete in AEDB-R and will be addressed under PICA-096.
PICA-164	RESERVOIR NEAR BLDG 3159 SITE 103	200306	In 2003, PICA-164 was listed as response completed in AEDB-R and will be addressed under PICA-195.
PICA-165	FORMER EXPLOSIVES LOADING (BLDG 1033)	200306	In 2003, PICA-165 was listed as response completed in AEDB-R and will be addressed under PICA-195.
PICA-166	FORMER ORDNANCE FACILITY (BLDG 1029)	200306	In 2003, PICA-166 was listed as response completed in AEDB-R and will be addressed under PICA-195.
PICA-167	FORMER PROP PLT/ORD FAC(BLDGS1373,1374)	200306	In 2003, PICA-167 was listed as response completed in AEDB-R and will be addressed under PICA-195.
PICA-168	PROPEL PLTS/PRESS HOUSE 1400,1402-1403	200306	In 2003, PICA-168 was listed as response complete in AEDB-R and will be addressed under PICA-163.
PICA-169	PROP PLTS (BLDGS1408,1408A-C,1409,1411)	200306	In 2003, PICA-169 was listed as response complete in AEDB-R and will be addressed under PICA-163.
PICA-170	PROP MELT PLTS (BLDGS1462-1464) SITE 170	200306	In 2003, PICA-170 was listed as response completed in AEDB-R and will be addressed under PICA-195.
PICA-172	FORMER NITRATION BLDG (BLDG 1031)	200306	In 2003, PICA-172 was listed as response complete in AEDB-R and will be addressed under PICA-163.
PICA-173	FORMER EX MAN/STOR(BLDGS1070,1071,1071C)	200306	In 2003, PICA-173 was listed as response complete in AEDB-R and will be addressed under PICA-171.
PICA-174	FORMER PROP PLTS(BLDGS1354,1357,1359)	200306	In 2003, PICA-174 was listed as response complete in AEDB-R and will be addressed under PICA-163.
PICA-176	LITTLE LEAGUE BASEBALL FIELD SITE 176	200406	In 2005, PICA-176 was listed as response complete in AEDB-R and will be addressed under PICA-096.
PICA-177	SAN SEWER SYSTEM BREAKS/LEAKS SITE 177	200406	In 2005, PICA-177 was listed as response complete in AEDB-R and will be addressed under PICA-096.
PICA-178	ORDNANCE FAC (BLDGS 604,604C) SITE 152	200306	In 2003, PICA-178 was listed as response complete in AEDB-R and will be addressed under PICA-175.
PICA-179	ORDINANCE FACILITY (BLDG 606) SITE 153	200306	In 2003, PICA-179 was listed as response complete in AEDB-R and will be addressed under PICA-175.
PICA-180	FIELD OFF,DISASS(BLDGS 617,617G) SITE154	200306	In 2003, PICA-180 was listed as response

Site Closeout (No Further Action) Summary

Site ID	Site Name	NFA Date	Documentation
			complete in AEDB-R and will be addressed under PICA-175.
PICA-181	ORDINANCE FAC (BLDGS 620,620B) SITE 155	199710	Site is an active operation and therefore, not ER,A eligible.
PICA-182	MUN TEST RANGES (BLDGS647,649,650)SITE11	199702	Site is not ER,A eligible
PICA-183	GEN PURPOSE MAGAZINE (BLDG1217) SITE 164	200406	In 2005, PICA-183 was listed as response complete in AEDB-R and will be addressed under PICA-096.
PICA-185	PROP STORAGE (BLDGS46,47,48) SITE 119	200306	In 2003, PICA-185 was listed as response completed in AEDB-R and will be addressed under PICA-069.
PICA-186	PROPELLANT STORAGE (BLDG 50) SITE 120	200306	In 2003, PICA-186 was listed as response completed in AEDB-R and will be addressed under PICA-069.
PICA-187	CHEMICAL STORAGE (BLDG 57) SITE 121	200306	In 2003, PICA-187 was listed as response completed in AEDB-R and will be addressed under PICA-069.
PICA-188	FORMER LABORATORY IN BLDG 350 SITE 185	200306	In 2003, PICA-188 was listed as response complete in AEDB-R and will be addressed under PICA-029.
PICA-189	FIREHOUSE (BUILDING 3316) SITE 186	200306	In 2003, PICA-189 was listed as response complete in AEDB-R and will be addressed under PICA-161.
PICA-190	OIL & ACID STORAGE (BLDG 67) SITE 187	200506	In 2005, PICA-190 was listed as response complete in AEDB-R and will be addressed under PICA-096.
PICA-191	FORMER COAL STORAGE AREA (BLDG 3173)	200306	In 2003, PICA-191 was listed as response completed in AEDB-R and will be addressed under PICA-075.
PICA-194	GREEN POND BROOK	200008	This site is listed as RC in AEDB-R and will be addressed under PICA-193.
PICA-197	AREA "O" OTHER BUILDINGS	199710	Site was determined RC by USACHPPM in 1997 during their RRSE study.
PICA-198	AREA "N"OTHER BUILDINGS	199710	Site was determined RC by USACHPPM in 1997 during their RRSE study.
PICA-201	Other Bldgs in Area P	199710	Site was determined RC by USACHPPM in 1997 during their RRSE study.
PICA-202	Other Bldgs in Area J	199710	Site was determined RC by USACHPPM in 1997 during their RRSE study.
PICA-203	FORMER POISON GAS LAB	200306	In 2003, PICA-203 was listed as response complete in AEDB-R and will be addressed under PICA-111.
PICA-207	STORAGE BUILDING 63	200506	In 2005, PICA-207 was listed as response complete in AEDB-R and will be addressed under PICA-096.
PICA-208	D.U. SCRAP STORAGE AREA	200306	In 2003, PICA-208 was listed as response completed in AEDB-R and will be addressed under PICA-069.
PICA-210	BUILDING 321	200306	In 2003, PICA-210 was listed as response complete in AEDB-R and will be addressed under PICA-108.

Date of IRP Inception: 197607

Past Phase Completion Milestones

1981

PA (PICA-001 - INACTIVE TETRYL WASTE PITS (SITES 17/18), PICA-002 - LOWER BURNING GROUND (SITE 34), PICA-006 - GUNCOTTON LINE (SITE 16), PICA-007 - INACT.ROCKET FUEL TEST G-2 AREA (SITE 1), PICA-008 - INACT. ROCKET FUEL TEST Areas, PICA-010 - BUILDING 95 FORMER WASTE IMPOUNDMENTS, PICA-012 - BLDG 3022 PHYS ANAL LAB/ENERG(SITE 83), PICA-013 - OPTS PROTO PROC FAC SITE BLDG 91(SITE78), PICA-015 - LAKE DENMARK (SITE 54), PICA-018 - FLUORO-CHEMICAL STRG(3045)(SITE 30), PICA-020 - PYROTECHNIC DEMO AREA (SITE 19), PICA-021 - FORMER NG PROC AREA (1361A-1364) ST 35, PICA-022 - POWER PLNT/HAZ WST TNKS/PROPELL PRD, PICA-029 - BUILDINGS IN 300 AREA, PICA-037 - FORMER HAZ WST TANK STOR(1380)(SITE 51), PICA-047 - STEAM POWER PLANT BLDG 506(SITE 63/65), PICA-050 - FORMER REACT MTRS/RCKT FUEL TST A 1500, PICA-052 - SHELL BURIAL AREA(NEAR B-3100)(SITE 6), PICA-053 - MUNITS&PROPLTS TST AREA/CHEM BURIAL, PICA-054 - MUNITS&PROPLT TST AREA(B-1222)(SITE 8), PICA-055 - MUNITS&PROPLT TEST AREA(B670,B673,B674), PICA-056 - FORMER CHEMICAL BURIAL AREA (SITE 10), PICA-057 - PICATINNY LAKE (SITE 53), PICA-058 - 600 HILL GROUNDWATER PLUME, PICA-059 - MUNITS/PYROTEC TEST AREA(B-640)(SITE 13), PICA-060 - MUNITIONS TEST AREA (B-636) SITE 14, PICA-061 - MUNITIONS TEST AREA(B616,B654)(SITE 15), PICA-063 - PYROTECHNIC TESTING RANGE (SITE 20), PICA-064 - POACH HOUSE (520) (SITE 147), PICA-065 - POST FARM LANDFILL (SITE 23), PICA-066 - SANITARY LANDFILL(NEAR SITE 20)SITE 24, PICA-067 - SANITARY LANDFILL(NEAR SITE 26)SITE 25, PICA-068 - DREDGE PILE (SITE 26), PICA-069 - PROPELLANT/CHEM/MATERIAL STORAGE, PICA-070 - SEWAGE TRMT PLANT SLUDGE BEDS(B80)SITE28, PICA-071 - DRUM STRG AREA(B31 YARD) SITE 29, PICA-072 - FORMER GAS STATION/ DRMO(SITE 31), PICA-073 - BLDG 553 STORAGE TANKS(SITE 32), PICA-074 - BLDG 527A STORAGE TANKS (SITE 33), PICA-075 - EQPMT & WASTE STORAGE IN 3000-AREA, PICA-076 - FORM METL PLATG WSTWTR FAC/LAGOONS B-24 , PICA-077 - Area E Groundwater (Site 38), PICA-078 - VEHCL MAINT FORMER-WW PRETRTMT FAC(B-31), PICA-079 - ORDNANCE/EXPLOSIVE BLDGS 800 AREA, PICA-080 - FORMER LAB PACK FAC (B-1094) SITE 41, PICA-081 - FORMER PCB STORAGE AREA (B-3114) SITE 42, PICA-082 - PESTICIDE STORAGE AREA (B-3157) SITE 43, PICA-083 - Golf Course Maintenance(BLDG 39)SITE 44, PICA-085 - BLDS IN 500-AREA, PICA-086 - HEAVY EQUIP. MAINTENANCE(BLDG 3005&3006), PICA-087 - Auto Hobby Shop (BLDG 3315)- Site 48, PICA-091 - BLDGS IN 200-AREA, PICA-092 - BASEBALL FIELDS (SITE 163), PICA-093 - WASTE BURIAL AREA NEAR SITES 19&34(180), PICA-094 - SURVEILLANCE LABORATORY(BLDG 92)-SITE 69, PICA-095 - BLDG 12, PHOTO PROCESSING FAC (SITE 86), PICA-096 - BLDG 22,PRECISION MACHINE SHOP(SITE 117), PICA-097 - BLD 41,PESTICIDE STR & FORM OIL/W SEP, PICA-098 - METAL PLATING SHOP, BLDG 64 (SITE 123), PICA-099 - BLDG 5,ARSENAL REPRITION & TRNG OFF(182), PICA-100 - GRAPHIC REPRODUCTION &TRNG BLDG 58 (183), PICA-101 - BLDG 163, PHOTOGRAPHY LAB (SITE 60), PICA-102 - FORMER WASTE DUMP/CHEMICAL LAB, PICA-103 - BLDGS 161&162,CHEMICAL LAB(SITE 104), PICA-104 - BLDGS 454&455,PROPELLANT BAG FLG AREA, PICA-105 - BLDG 166,PROPELLANT TEST (SITE 124), PICA-106 - BLDGS 172&183 & BLDGS IN 400 AREA, PICA-107 - BLDGS 404,407,&408,CHMCL LAB&PROP PLANTS, PICA-108 - BLDGS in 400/300 AREA, PICA-109 - BLDGS 427&427B,PROPELLANT PRO(SITE 140), PICA-110 - BLDG 429,PROPELLANT CRUSHING(SITE 141), PICA-111 - FORMER BLDG 435,PROPELLANT SOLV MIXING , PICA-112 - BLDG 436,PROPELLANT PROCESSING(SITE 143), PICA-113 - BLDG 462,PROPELLANT FINISHING (SITE 144), PICA-114 - BLDG 477,EXPLOSIVE&PROPELLANT MIX AREA, PICA-115 - BLDG 497,POWDER PRESSING (SITE 146), PICA-116 - BLDGS 311&319, FORMER GAS STATION & , PICA-117 - BLDG 302,SERVICE SHOPS (SITE 134), PICA-118 - METALLURGY LAB, BLDG 315 (SITE 135), PICA-119 - BLDG 355,METALLURGY LAB (SITE 136), PICA-120 - FORMER BLDG 24 PLATING FACIL (SITE 21), PICA-121 - BUILDING 336 - EXPLOSIVE LAUNDRY, PICA-122 - PROPELLANT TESTING (BLDG 197) SITE 126, PICA-123 - FORMER HAZ WASTE STOR/FUSE ASS(BLDG 210), PICA-124 - LOADING/DISASSEMBLY PLT (BLDG241)SITE 64, PICA-125 - MINE ASSEMBLY FACILITY(BLDG 268) SITE 98, PICA-126 - EXP LOADING FACILITY (BLDG 276) SITE 100, PICA-127 - MELT CASTING OPERATION (BLDG 230)SITE127, PICA-128 - EXP PRESSING PLT (BLDGS235/236) SITE 128, PICA-129 - CHANGE HOUSE (BLDG 240) SITE 129, PICA-130 - POWDER PRESS/PELLETING(BLDG 252)SITE 130, PICA-131 - FORMER ORDNANACE MANUFAC. (BLDG 266) , PICA-132 - FORMER LOAD FACILITY (BDLGS271/271I-N) , PICA-133 - CHANGE HOUSE (BUILDING 600) SITE 151, PICA-134 - R&D LAB/Chem Storage 3000-Area, PICA-135 - BLDGS IN THE 900-AREA, PICA-136 - HIGH PRESSURE BOILER (BLDG 3013) SITE 79, PICA-137 - XRAY PHOTOPROCESSING LAB(BLDG 908)SITE82, PICA-138 - ELECTROMAG.

GUN TEST SHED(BLDG329)SITE90, PICA-139 - AMMUN DEMO 1 ORD FAC(BLDGS800/807)SITE93, PICA-140 - POST ENG MAINT SHOP (BLDG 501) SITE 97, PICA-141 - FORMER ENLISTED MENS BARRACKS(BLDG 3050, PICA-142 - PROPELLANT PLANT (BLDG 511) SITE 105, PICA-143 - ORDNANCE FAC (BLDGS 717,722,732)SITE 108, PICA-144 - PYROTECHNIC PLANT (BLDG 445) SITE 109, PICA-145 - 500 AREA BUILDINGS SITE 110, PICA-146 - PROPELLANT PLANT (BLDG 561) SITE 113, PICA-147 - ADMINISTRATION BLDG (BLDG 382) SITE 137, PICA-148 - CHANGE HOUSE (BLDG 527) SITE 148, PICA-149 - PROPELLANT PLANT (BLDG541) SITE 149, PICA-150 - PROPELLANT PLANT (BLDG 555) SITE 150, PICA-151 - Ordnance Bldgs 813, 816/816B, PICA-152 - ORDNANCE FAC (BLDGS 820,823) SITE 157, PICA-153 - HIGH-EXP MAGAZINE (BLDG 926) SITE 158, PICA-154 - SUPPLIES & SER. BLDG (BLDG 975) SITE 159, PICA-155 - TECUP BUILDINGS SITE 178, PICA-156 - REFRIG. & INERT GAS PLT(BLDG 523)SITE184, PICA-157 - FORMER MOTORS/ROC FUEL TST AREA(3600) , PICA-158 - HELICOPTER MAINTENANCE(BLDG 3801)SITE175, PICA-159 - PARKING AREA ACROSS FROM BLDG 3328, PICA-160 - CHEM LAB & ADMIN BLDG (BLDG 3404)SITE173, PICA-161 - SEWAGE TRMT/CHEM LAB/FIREHOUSE/PRKG, PICA-162 - SHELL BURIAL AREAS NEAR SITE 5, PICA-163 - Propellnt/Rcket Prod 1300/1400 Area, PICA-164 - RESERVOIR NEAR BLDG 3159 SITE 103, PICA-165 - FORMER EXPLOSIVES LOADING (BLDG 1033) , PICA-166 - FORMER ORDNANCE FACILITY (BLDG 1029) , PICA-167 - FORMER PROP PLT/ORD FAC(BLDGS1373,1374) , PICA-168 - PROPEL PLTS/PRESS HOUSE 1400,1402-1403, PICA-169 - PROP PLTS (BLDGS1408,1408A-C,1409,1411), PICA-170 - PROP MELT PLTS (BLDGS1462-1464) SITE 170, PICA-171 - ORDNANCE BLDG/EXPLOSIVES PROD., PICA-172 - FORMER NITRATION BLDG (BLDG 1031) , PICA-173 - FORMER EX MAN/STOR(BLDGS1070,1071,1071C), PICA-174 - FORMER PROP PLTS(BLDGS1354,1357,1359) , PICA-175 - ORDNANCE BLDGS in 600-AREA, PICA-176 - LITTLE LEAGUE BASEBALL FIELD SITE 176, PICA-177 - SAN SEWER SYSTEM BREAKS/LEAKS SITE 177, PICA-178 - ORDNANCE FAC (BLDGS 604,604C) SITE 152, PICA-179 - ORDINANCE FACILITY (BLDG 606) SITE 153, PICA-180 - FIELD OFF,DISASS(BLDGS 617,617G) SITE154, PICA-181 - ORDINANCE FAC (BLDGS 620,620B) SITE 155, PICA-182 - MUN TEST RANGES (BLDGS647,649,650)SITE11, PICA-183 - GEN PURPOSE MAGAZINE (BLDG1217) SITE 164, PICA-184 - BUILDINGS(1600,1601,1609,1610) SITE 94, PICA-185 - PROP STORAGE (BLDGS46,47,48) SITE 119, PICA-186 - PROPELLANT STORAGE (BLDG 50) SITE 120, PICA-187 - CHEMICAL STORAGE (BLDG 57) SITE 121, PICA-188 - FORMER LABORATORY IN BLDG 350 SITE 185, PICA-189 - FIREHOUSE (BUILDING 3316) SITE 186, PICA-190 - OIL & ACID STORAGE (BLDG 67) SITE 187, PICA-191 - FORMER COAL STORAGE AREA (BLDG 3173) , PICA-192 - APPLE TREES RECREATIONAL AREA , PICA-193 - GREEN POND AND BEAR SWAMP BROOK SITE 190, PICA-194 - GREEN POND BROOK, PICA-195 - BLDGS IN 1400/1300/3100/1000 AREAS)

1985

PA

(PICA-089 - PETROLEUM LEAK AREA(BLDG 305)SITE 52)

1986

IRA

(PICA-089 - PETROLEUM LEAK AREA(BLDG 305)SITE 52)

1989

SI

(PICA-001 - INACTIVE TETRYL WASTE PITS (SITES 17/18), PICA-002 - LOWER BURNING GROUND (SITE 34), PICA-006 - GUNCOTTON LINE (SITE 16), PICA-007 - INACT.ROCKET FUEL TEST G-2 AREA (SITE 1), PICA-008 - INACT. ROCKET FUEL TEST Areas, PICA-010 - BUILDING 95 FORMER WASTE IMPOUNDMENTS, PICA-012 - BLDG 3022 PHYS ANAL LAB/ENERG(SITE 83), PICA-013 - OPTS PROTO PROC FAC SITE BLDG 91(SITE78), PICA-015 - LAKE DENMARK (SITE 54), PICA-018 - FLUORO-CHEMICAL STRG(3045)(SITE 30), PICA-020 - PYROTECHNIC DEMO AREA (SITE 19), PICA-021 - FORMER NG PROC AREA (1361A-1364) ST 35, PICA-022 - POWER PLNT/HAZ WST TNKS/PROPELL PRD, PICA-029 - BUILDINGS IN 300 AREA, PICA-037 - FORMER HAZ WST TANK STOR(1380)(SITE 51), PICA-047 - STEAM POWER PLANT BLDG 506(SITE 63/65), PICA-050 - FORMER REACT MTRS/RCKT FUEL TST A 1500, PICA-052 - SHELL BURIAL AREA(NEAR B-3100)(SITE 6), PICA-053 - MUNITS&PROPLTS TST AREA/CHEM BURIAL, PICA-054 - MUNITS&PROPLT TST AREA(B-1222)(SITE 8), PICA-055 - MUNITS&PROPLT TEST AREA(B670,B673,B674), PICA-056 - FORMER CHEMICAL BURIAL AREA (SITE 10), PICA-057 - PICATINNY LAKE (SITE 53), PICA-058 - 600 HILL GROUNDWATER PLUME, PICA-059 - MUNITS/PYROTEC TEST AREA(B-640)(SITE 13), PICA-060 - MUNITIONS TEST AREA (B-636) SITE 14, PICA-061 - MUNITIONS TEST AREA(B616,B654)(SITE 15), PICA-063 - PYROTECHNIC TESTING RANGE (SITE 20), PICA-064 -

POACH HOUSE (520) (SITE 147), PICA-065 - POST FARM LANDFILL (SITE 23), PICA-066 - SANITARY LANDFILL(NEAR SITE 20)SITE 24, PICA-067 - SANITARY LANDFILL(NEAR SITE 26)SITE 25, PICA-068 - DREDGE PILE (SITE 26), PICA-069 - PROPELLANT/CHEM/MATERIAL STORAGE, PICA-070 - SEWAGE TRMT PLANT SLUDGE BEDS(B80)SITE28, PICA-071 - DRUM STRG AREA(B31 YARD) SITE 29, PICA-072 - FORMER GAS STATION/ DRMO(SITE 31), PICA-073 - BLDG 553 STORAGE TANKS(SITE 32), PICA-074 - BLDG 527A STORAGE TANKS (SITE 33), PICA-075 - EQPMT & WASTE STORAGE IN 3000-AREA, PICA-078 - VEHCL MAINT FORMER-WW PRETRTMT FAC(B-31), PICA-079 - ORDNANCE/EXPLOSIVE BLDGS 800 AREA, PICA-080 - FORMER LAB PACK FAC (B-1094) SITE 41, PICA-081 - FORMER PCB STORAGE AREA (B-3114) SITE 42, PICA-082 - PESTICIDE STORAGE AREA (B-3157) SITE 43, PICA-083 - Golf Course Maintenance(BLDG 39)SITE 44, PICA-085 - BLDS IN 500-AREA, PICA-086 - HEAVY EQUIP. MAINTENANCE(BLDG 3005&3006), PICA-091 - BLDGS IN 200-AREA, PICA-092 - BASEBALL FIELDS (SITE 163), PICA-093 - WASTE BURIAL AREA NEAR SITES 19&34(180), PICA-095 - BLDG 12, PHOTO PROCESSING FAC (SITE 86), PICA-096 - BLDG 22,PRECISION MACHINE SHOP(SITE 117), PICA-097 - BLD 41,PESTICIDE STR & FORM OIL/W SEP, PICA-098 - METAL PLATING SHOP, BLDG 64 (SITE 123), PICA-099 - BLDG 5,ARSENAL REPRTION & TRNG OFF(182), PICA-100 - GRAPHIC REPRODUCTION &TRNG BLDG 58 (183), PICA-101 - BLDG 163, PHOTOGRAPHY LAB (SITE 60), PICA-102 - FORMER WASTE DUMP/CHEMICAL LAB, PICA-103 - BLDGS 161&162,CHEMICAL LAB(SITE 104), PICA-104 - BLDGS 454&455,PROPELLANT BAG FLG AREA, PICA-105 - BLDG 166,PROPELLANT TEST (SITE 124), PICA-106 - BLDGS 172&183 & BLDGS IN 400 AREA, PICA-107 - BLDGS 404,407,&408,CHMCL LAB&PROP PLANTS, PICA-108 - BLDGS in 400/300 AREA, PICA-109 - BLDGS 427&427B,PROPELLANT PRO(SITE 140), PICA-110 - BLDG 429,PROPELLANT CRUSHING(SITE 141), PICA-111 - FORMER BLDG 435,PROPELLANT SOLV MIXING , PICA-112 - BLDG 436,PROPELLANT PROCESSING(SITE 143), PICA-113 - BLDG 462,PROPELLANT FINISHING (SITE 144), PICA-114 - BLDG 477,EXPLOSIVE&PROPELLANT MIX AREA, PICA-115 - BLDG 497,POWDER PRESSING (SITE 146), PICA-116 - BLDGS 311&319, FORMER GAS STATION & , PICA-117 - BLDG 302,SERVICE SHOPS (SITE 134), PICA-118 - METALLURGY LAB, BLDG 315 (SITE 135), PICA-119 - BLDG 355,METALLURGY LAB (SITE 136), PICA-120 - FORMER BLDG 24 PLATING FACIL (SITE 21), PICA-121 - BUILDING 336 - EXPLOSIVE LAUNDRY) (PICA-011 - BLDG 60 SATELITE WSTE ACCOM AREA(SITE122)

PA
1990
SI (PICA-076 - FORM METL PLATG WSTWTR FAC/LAGOONS B-24 , PICA-077 - Area E Groundwater (Site 38))

1991
SI (PICA-011 - BLDG 60 SATELITE WSTE ACCOM AREA(SITE122, PICA-036 - FORMER PROPELLANT PLANT(1010)(SITE 106), PICA-084 - VEHICLE MAINTENCE (BLDG 33)SITE 45, PICA-088 - Soldering Storage Area (BLDG 19&19A), PICA-089 - PETROLEUM LEAK AREA(BLDG 305)SITE 52, PICA-122 - PROPELLANT TESTING (BLDG 197) SITE 126, PICA-123 - FORMER HAZ WASTE STOR/FUSE ASS(BLDG 210), PICA-124 - LOADING/DISASSEMBLY PLT (BLDG241)SITE 64, PICA-125 - MINE ASSEMBLY FACILITY(BLDG 268) SITE 98, PICA-126 - EXP LOADING FACILITY (BLDG 276) SITE 100, PICA-127 - MELT CASTING OPERATION (BLDG 230)SITE127, PICA-128 - EXP PRESSING PLT (BLDGS235/236) SITE 128, PICA-129 - CHANGE HOUSE (BLDG 240) SITE 129, PICA-130 - POWDER PRESS/PELLETING(BLDG 252)SITE 130, PICA-131 - FORMER ORDNANACE MANUFAC. (BLDG 266) , PICA-132 - FORMER LOAD FACILITY (BDLGS271/271I-N) , PICA-133 - CHANGE HOUSE (BUILDING 600) SITE 151, PICA-134 - R&D LAB/Chem Storage 3000-Area, PICA-135 - BLDGS IN THE 900-AREA, PICA-136 - HIGH PRESSURE BOILER (BLDG 3013) SITE 79, PICA-137 - XRAY PHOTOPROCESSING LAB(BLDG 908)SITE82, PICA-138 - ELECTROMAG. GUN TEST SHED(BLDG329)SITE90, PICA-139 - AMMUN DEMO 1 ORD FAC(BLDGS800/807)SITE93, PICA-140 - POST ENG MAINT SHOP (BLDG 501) SITE 97, PICA-141 - FORMER ENLISTED MENS BARRACKS(BLDG 3050, PICA-142 - PROPELLANT PLANT (BLDG 511) SITE 105, PICA-143 - ORDNANCE FAC (BLDGS 717,722,732)SITE 108, PICA-144 - PYROTECHNIC PLANT (BLDG 445) SITE 109, PICA-145 - 500 AREA BUILDINGS SITE 110, PICA-146 - PROPELLANT PLANT (BLDG 561) SITE 113, PICA-147 - ADMINISTRATION BLDG (BLDG 382) SITE 137, PICA-148 - CHANGE HOUSE (BLDG 527) SITE 148, PICA-149 - PROPELLANT PLANT (BLDG541) SITE 149, PICA-150 - PROPELLANT PLANT (BLDG 555) SITE 150, PICA-151 - Ordnance Bldgs 813, 816/816B, PICA-152 -

	<p>ORDNANCE FAC (BLDGS 820,823) SITE 157, PICA-153 - HIGH-EXP MAGAZINE (BLDG 926) SITE 158, PICA-154 - SUPPLIES & SER. BLDG (BLDG 975) SITE 159, PICA-155 - TECUP BUILDINGS SITE 178, PICA-156 - REFRIG. & INERT GAS PLT(BLDG 523)SITE184, PICA-157 - FORMER MOTORS/ROC FUEL TST AREA(3600) , PICA-158 - HELICOPTER MAINTENANCE(BLDG 3801)SITE175, PICA-159 - PARKING AREA ACROSS FROM BLDG 3328, PICA-160 - CHEM LAB & ADMIN BLDG (BLDG 3404)SITE173, PICA-161 - SEWAGE TRMT/CHEM LAB/FIREHOUSE/PRKG, PICA-162 - SHELL BURIAL AREAS NEAR SITE 5, PICA-163 - Propellnt/Rcket Prod 1300/1400 Area, PICA-164 - RESERVOIR NEAR BLDG 3159 SITE 103, PICA-165 - FORMER EXPLOSIVES LOADING (BLDG 1033) , PICA-166 - FORMER ORDNANCE FACILITY (BLDG 1029) , PICA-167 - FORMER PROP PLT/ORD FAC(BLDGS1373,1374) , PICA-168 - PROPEL PLTS/PRESS HOUSE 1400,1402-1403, PICA-169 - PROP PLTS (BLDGS1408,1408A-C,1409,1411), PICA-170 - PROP MELT PLTS (BLDGS1462-1464) SITE 170, PICA-171 - ORDNANCE BLDG/EXPLOSIVES PROD., PICA-172 - FORMER NITRATION BLDG (BLDG 1031) , PICA-173 - FORMER EX MAN/STOR(BLDGS1070,1071,1071C), PICA-174 - FORMER PROP PLTS(BLDGS1354,1357,1359) , PICA-175 - ORDNANCE BLDGS in 600-AREA, PICA-176 - LITTLE LEAGUE BASEBALL FIELD SITE 176, PICA-178 - ORDNANCE FAC (BLDGS 604,604C) SITE 152, PICA-179 - ORDINANCE FACILITY (BLDG 606) SITE 153, PICA-180 - FIELD OFF,DISASS(BLDGS 617,617G) SITE154, PICA-182 - MUN TEST RANGES (BLDGS647,649,650)SITE11, PICA-183 - GEN PURPOSE MAGAZINE (BLDG1217) SITE 164, PICA-184 - BUILDINGS(1600,1601,1609,1610) SITE 94, PICA-185 - PROP STORAGE (BLDGS46,47,48) SITE 119, PICA-186 - PROPELLANT STORAGE (BLDG 50) SITE 120, PICA-187 - CHEMICAL STORAGE (BLDG 57) SITE 121, PICA-191 - FORMER COAL STORAGE AREA (BLDG 3173) , PICA-193 - GREEN POND AND BEAR SWAMP BROOK SITE 190, PICA-194 - GREEN POND BROOK, PICA-195 - BLDGS IN 1400/1300/3100/1000 AREAS)</p>
PA	(PICA-036 - FORMER PROPELLANT PLANT(1010)(SITE 106), PICA-084 - VEHICLE MAINTENCE (BLDG 33)SITE 45, PICA-088 - Soldering Storage Area (BLDG 19&19A))
IRA	(PICA-073 - BLDG 553 STORAGE TANKS(SITE 32), PICA-074 - BLDG 527A STORAGE TANKS (SITE 33), PICA-083 - Golf Course Maintenance(BLDG 39)SITE 44, PICA-123 - FORMER HAZ WASTE STOR/FUSE ASS(BLDG 210))
1992	
IRA	(PICA-136 - HIGH PRESSURE BOILER (BLDG 3013) SITE 79)
SI	(PICA-177 - SAN SEWER SYSTEM BREAKS/LEAKS SITE 177, PICA-192 - APPLE TREES RECREATIONAL AREA)
1993	
IRA	(PICA-072 - FORMER GAS STATION/ DRMO(SITE 31))
1994	
PA	(PICA-199 - FORMER PISTOL RANGE DUMP&NAVY MANURE PIT, PICA-200 - AREA (L) OTHER BUILDINGS)
1995	
SI	(PICA-199 - FORMER PISTOL RANGE DUMP&NAVY MANURE PIT, PICA-200 - AREA (L) OTHER BUILDINGS)
1996	
PA	(PICA-197 - AREA "O" OTHER BUILDINGS, PICA-198 - AREA "N"OTHER BUILDINGS, PICA-201 - Other Bldgs in Area P, PICA-202 - Other Bldgs in Area J, PICA-203 - FORMER POISON GAS LAB, PICA-204 - MID-VALLEY GROUNDWATER, PICA-205 - AREA B GROUNDWATER , PICA-206 - AREA C GROUNDWATER, PICA-207 - STORAGE BUILDING 63, PICA-208 - D.U. SCRAP STORAGE AREA, PICA-209 - BUILDING 167, LOCOMOTIVE AREA, BLDG. 430, PICA-210 - BUILDING 321)
1997	
SI	(PICA-181 - ORDINANCE FAC (BLDGS 620,620B) SITE 155, PICA-197 - AREA "O" OTHER BUILDINGS, PICA-198 - AREA "N"OTHER BUILDINGS, PICA-201 - Other Bldgs in Area P, PICA-202 - Other Bldgs in Area J)
RI/FS	(PICA-036 - FORMER PROPELLANT PLANT(1010)(SITE 106), PICA-054 - MUNITS&PROPLT TST AREA(B-1222)(SITE 8), PICA-059 - MUNITS/PYROTEC TEST AREA(B-640)(SITE 13), PICA-068 - DREDGE PILE (SITE 26), PICA-070 - SEWAGE TRMT PLANT SLUDGE BEDS(B80)SITE28, PICA-088 - Soldering Storage

1998	Area (BLDG 19&19A), PICA-092 - BASEBALL FIELDS (SITE 163), PICA-095 - BLDG 12, PHOTO PROCESSING FAC (SITE 86), PICA-099 - BLDG 5, ARSENAL REPRTION & TRNG OFF(182), PICA-100 - GRAPHIC REPRODUCTION & TRNG BLDG 58 (183), PICA-105 - BLDG 166, PROPELLANT TEST (SITE 124), PICA-112 - BLDG 436, PROPELLANT PROCESSING(SITE 143), PICA-182 - MUN TEST RANGES (BLDGS647,649,650)SITE11)
1998 SI	(PICA-087 - Auto Hobby Shop (BLDG 3315)- Site 48, PICA-094 - SURVEILLANCE LABORATORY(BLDG 92)-SITE 69, PICA-188 - FORMER LABORATORY IN BLDG 350 SITE 185, PICA-189 - FIREHOUSE (BUILDING 3316) SITE 186, PICA-190 - OIL & ACID STORAGE (BLDG 67) SITE 187, PICA-203 - FORMER POISON GAS LAB, PICA-204 - MID-VALLEY GROUNDWATER, PICA-209 - BUILDING 167, LOCOMOTIVE AREA, BLDG. 430, PICA-210 - BUILDING 321)
2000 IRA RI/FS	(PICA-011 - BLDG 60 SATELITE WSTE ACCOM AREA(SITE122) (PICA-055 - MUNITS&PROPLT TEST AREA(B670,B673,B674), PICA-060 - MUNITIONS TEST AREA (B-636) SITE 14, PICA-061 - MUNITIONS TEST AREA(B616,B654)(SITE 15), PICA-083 - Golf Course Maintenance(BLDG 39)SITE 44, PICA-110 - BLDG 429, PROPELLANT CRUSHING(SITE 141), PICA-120 - FORMER BLDG 24 PLATING FACIL (SITE 21), PICA-194 - GREEN POND BROOK)
2001 RI/FS PA	(PICA-078 - VEHCL MAINT FORMER-WW PRETRTMT FAC(B-31), PICA-087 - Auto Hobby Shop (BLDG 3315)- Site 48, PICA-118 - METALLURGY LAB, BLDG 315 (SITE 135)) (PBC Picatinny - PBC)
2002 IRA RI/FS	(PICA-050 - FORMER REACT MTRS/RCKT FUEL TST A 1500) (PICA-063 - PYROTECHNIC TESTING RANGE (SITE 20), PICA-066 - SANITARY LANDFILL(NEAR SITE 20)SITE 24)
2003 RI/FS	(PICA-007 - INACT.ROCKET FUEL TEST G-2 AREA (SITE 1), PICA-010 - BUILDING 95 FORMER WASTE IMPOUNDMENTS, PICA-012 - BLDG 3022 PHYS ANAL LAB/ENERG(SITE 83), PICA-018 - FLUOROCHEMICAL STRG(3045)(SITE 30), PICA-021 - FORMER NG PROC AREA (1361A-1364) ST 35, PICA-037 - FORMER HAZ WST TANK STOR(1380)(SITE 51), PICA-047 - STEAM POWER PLANT BLDG 506(SITE 63/65), PICA-052 - SHELL BURIAL AREA(NEAR B-3100)(SITE 6), PICA-056 - FORMER CHEMICAL BURIAL AREA (SITE 10), PICA-064 - POACH HOUSE (520) (SITE 147), PICA-073 - BLDG 553 STORAGE TANKS(SITE 32), PICA-074 - BLDG 527A STORAGE TANKS (SITE 33), PICA-080 - FORMER LAB PACK FAC (B-1094) SITE 41, PICA-081 - FORMER PCB STORAGE AREA (B-3114) SITE 42, PICA-082 - PESTICIDE STORAGE AREA (B-3157) SITE 43, PICA-086 - HEAVY EQUIP. MAINTENANCE(BLDG 3005&3006), PICA-089 - PETROLEUM LEAK AREA(BLDG 305)SITE 52, PICA-103 - BLDGS 161&162,CHEMICAL LAB(SITE 104), PICA-104 - BLDGS 454&455,PROPELLANT BAG FLG AREA, PICA-106 - BLDGS 172&183 & BLDGS IN 400 AREA, PICA-107 - BLDGS 404,407,&408,CHMCL LAB&PROP PLANTS, PICA-109 - BLDGS 427&427B,PROPELLANT PRO(SITE 140), PICA-113 - BLDG 462,PROPELLANT FINISHING (SITE 144), PICA-115 - BLDG 497,POWDER PRESSING (SITE 146), PICA-116 - BLDGS 311&319, FORMER GAS STATION & , PICA-117 - BLDG 302,SERVICE SHOPS (SITE 134), PICA-119 - BLDG 355,METALLURGY LAB (SITE 136), PICA-121 - BUILDING 336 - EXPLOSIVE LAUNDRY, PICA-123 - FORMER HAZ WASTE STOR/FUSE ASS(BLDG 210), PICA-124 - LOADING/DISASSEMBLY PLT (BLDG241)SITE 64, PICA-125 - MINE ASSEMBLY FACILITY(BLDG 268) SITE 98, PICA-126 - EXP LOADING FACILITY (BLDG 276) SITE 100, PICA-127 - MELT CASTING OPERATION (BLDG 230)SITE127, PICA-128 - EXP PRESSING PLT (BLDGS235/236) SITE 128, PICA-129 - CHANGE HOUSE (BLDG 240) SITE 129, PICA-130 - POWDER PRESS/PELLETING(BLDG 252)SITE 130, PICA-131 - FORMER ORDNANACE MANUFAC. (BLDG 266) , PICA-132 - FORMER LOAD FACILITY (BDLGS271/2711-N) , PICA-133 - CHANGE HOUSE (BUILDING 600) SITE 151, PICA-137 - XRAY PHOTOPROCESSING LAB(BLDG 908)SITE82, PICA-138 - ELECTROMAG. GUN TEST SHED(BLDG329)SITE90, PICA-139 - AMMUN DEMO 1 ORD FAC(BLDGS800/807)SITE93, PICA-140 - POST ENG MAINT SHOP (BLDG 501) SITE 97, PICA-141 -

	<p>FORMER ENLISTED MENS BARRACKS(BLDG 3050, PICA-142 - PROPELLANT PLANT (BLDG 511) SITE 105, PICA-144 - PYROTECHNIC PLANT (BLDG 445) SITE 109, PICA-145 - 500 AREA BUILDINGS SITE 110, PICA-146 - PROPELLANT PLANT (BLDG 561) SITE 113, PICA-147 - ADMINISTRATION BLDG (BLDG 382) SITE 137, PICA-148 - CHANGE HOUSE (BLDG 527) SITE 148, PICA-149 - PROPELLANT PLANT (BLDG541) SITE 149, PICA-150 - PROPELLANT PLANT (BLDG 555) SITE 150, PICA-151 - Ordnance Bldgs 813, 816/816B, PICA-152 - ORDNANCE FAC (BLDGS 820,823) SITE 157, PICA-153 - HIGH-EXP MAGAZINE (BLDG 926) SITE 158, PICA-154 - SUPPLIES & SER. BLDG (BLDG 975) SITE 159, PICA-156 - REFRIG. & INERT GAS PLT(BLDG 523)SITE184, PICA-157 - FORMER MOTORS/ROC FUEL TST AREA(3600) , PICA-159 - PARKING AREA ACROSS FROM BLDG 3328, PICA-160 - CHEM LAB & ADMIN BLDG (BLDG 3404)SITE173, PICA-164 - RESERVOIR NEAR BLDG 3159 SITE 103, PICA-165 - FORMER EXPLOSIVES LOADING (BLDG 1033) , PICA-166 - FORMER ORDNANCE FACILITY (BLDG 1029) , PICA-167 - FORMER PROP PLT/ORD FAC(BLDGS1373,1374) , PICA-168 - PROPEL PLTS/PRESS HOUSE 1400,1402-1403, PICA-169 - PROP PLTS (BLDGS1408,1408A-C,1409,1411), PICA-170 - PROP MELT PLTS (BLDGS1462-1464) SITE 170, PICA-172 - FORMER NITRATION BLDG (BLDG 1031) , PICA-173 - FORMER EX MAN/STOR(BLDGS1070,1071,1071C), PICA-174 - FORMER PROP PLTS(BLDGS1354,1357,1359) , PICA-178 - ORDNANCE FAC (BLDGS 604,604C) SITE 152, PICA-179 - ORDINANCE FACILITY (BLDG 606) SITE 153, PICA-180 - FIELD OFF,DISASS(BLDGS 617,617G) SITE154, PICA-185 - PROP STORAGE (BLDGS46,47,48) SITE 119, PICA-186 - PROPELLANT STORAGE (BLDG 50) SITE 120, PICA-187 - CHEMICAL STORAGE (BLDG 57) SITE 121, PICA-188 - FORMER LABORATORY IN BLDG 350 SITE 185, PICA-189 - FIREHOUSE (BUILDING 3316) SITE 186, PICA-191 - FORMER COAL STORAGE AREA (BLDG 3173) , PICA-203 - FORMER POISON GAS LAB, PICA-208 - D.U. SCRAP STORAGE AREA, PICA-210 - BUILDING 321)</p>
2004	
RI/FS	(PICA-076 - FORM METL PLATG WSTWTR FAC/LAGOONS B-24 , PICA-084 - VEHICLE MAINTENCE (BLDG 33)SITE 45, PICA-094 - SURVEILLANCE LABORATORY(BLDG 92)-SITE 69, PICA-101 - BLDG 163, PHOTOGRAPHY LAB (SITE 60), PICA-176 - LITTLE LEAGUE BASEBALL FIELD SITE 176, PICA-177 - SAN SEWER SYSTEM BREAKS/LEAKS SITE 177, PICA-183 - GEN PURPOSE MAGAZINE (BLDG1217) SITE 164)
2005	
IRA	(PICA-001 - INACTIVE TETRYL WASTE PITS (SITES 17/18), PICA-111 - FORMER BLDG 435,PROPELLANT SOLV MIXING , PICA-193 - GREEN POND AND BEAR SWAMP BROOK SITE 190, PICA-209 - BUILDING 167, LOCOMOTIVE AREA, BLDG. 430)
RI/FS	(PICA-002 - LOWER BURNING GROUND (SITE 34), PICA-029 - BUILDINGS IN 300 AREA, PICA-053 - MUNITS&PROPLTS TST AREA/CHEM BURIAL, PICA-065 - POST FARM LANDFILL (SITE 23), PICA-069 - PROPELLANT/CHEM/MATERIAL STORAGE, PICA-098 - METAL PLATING SHOP, BLDG 64 (SITE 123), PICA-114 - BLDG 477,EXPLOSIVE&PROPELLANT MIX AREA, PICA-158 - HELICOPTER MAINTENANCE(BLDG 3801)SITE175, PICA-161 - SEWAGE TRMT/CHEM LAB/FIREHOUSE/PRKG, PICA-190 - OIL & ACID STORAGE (BLDG 67) SITE 187, PICA-193 - GREEN POND AND BEAR SWAMP BROOK SITE 190, PICA-207 - STORAGE BUILDING 63)
2006	
IRA	(PICA-076 - FORM METL PLATG WSTWTR FAC/LAGOONS B-24)
2007	
RA(C)	(PICA-065 - POST FARM LANDFILL (SITE 23), PICA-067 - SANITARY LANDFILL(NEAR SITE 26)SITE 25, PICA-076 - FORM METL PLATG WSTWTR FAC/LAGOONS B-24 , PICA-077 - Area E Groundwater (Site 38), PICA-093 - WASTE BURIAL AREA NEAR SITES 19&34(180), PICA-193 - GREEN POND AND BEAR SWAMP BROOK SITE 190)
RI/FS	(PICA-020 - PYROTECHNIC DEMO AREA (SITE 19), PICA-067 - SANITARY LANDFILL(NEAR SITE 26)SITE 25, PICA-077 - Area E Groundwater (Site 38), PICA-093 - WASTE BURIAL AREA NEAR SITES 19&34(180))
RD	(PICA-065 - POST FARM LANDFILL (SITE 23), PICA-067 - SANITARY LANDFILL(NEAR SITE 26)SITE 25, PICA-076 - FORM METL PLATG WSTWTR FAC/LAGOONS B-24 , PICA-077 - Area E Groundwater (Site 38), PICA-093 - WASTE BURIAL AREA NEAR SITES 19&34(180), PICA-193 - GREEN POND AND BEAR SWAMP BROOK SITE 190)

2008
 RI/FS (PICA-102 - FORMER WASTE DUMP/CHEMICAL LAB, PICA-205 - AREA B GROUNDWATER)
 RA(C) (PICA-102 - FORMER WASTE DUMP/CHEMICAL LAB, PICA-205 - AREA B GROUNDWATER)
 RD (PICA-102 - FORMER WASTE DUMP/CHEMICAL LAB, PICA-205 - AREA B GROUNDWATER)
 RA(O) (PICA-077 - Area E Groundwater (Site 38))
 2009
 RD (PICA-072 - FORMER GAS STATION/ DRMO(SITE 31))
 RI/FS (PICA-072 - FORMER GAS STATION/ DRMO(SITE 31), PICA-206 - AREA C GROUNDWATER)
 RA(C) (PBC Picatinny - PBC)

Projected Phase Completion Milestones

See attached schedule

Projected Record of Decision (ROD)/Decision Document (DD) Approval Dates

Site ID	Site Name	ROD/DD Title	ROD/DD Date
---------	-----------	--------------	-------------

Final RA(C) Completion Date: 201409

Schedule for Next Five-Year Review: 2011

Estimated Completion Date of IRP at Installation (including LTM phase): 202709

PICATINNY ARSENAL IRP Schedule

= phase underway

SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PBC Picatinny	PBC	RA(O)						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-001	INACTIVE TETRYL WASTE PITS (SITES 17/18)	RI/FS						
		RD						
		RA(C)						
		RA(O)						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-002	LOWER BURNING GROUND (SITE 34)	RD						
		RA(C)						
		RA(O)						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-006	GUNCOTTON LINE (SITE 16)	RI/FS						
		RA(C)						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-008	INACT. ROCKET FUEL TEST Areas	RA(O)						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-011	BLDG 60 SATELITE WSTE ACCOM AREA(SITE122)	RI/FS						
		RD						
		RA(C)						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-013	OPTS PROTO PROC FAC SITE BLDG 91(SITE78)	RI/FS						
		RD						
		RA(C)						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-015	LAKE DENMARK (SITE 54)	RI/FS						
		RA(C)						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-020	PYROTECHNIC DEMO AREA (SITE 19)	LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-022	POWER PLNT/HAZ WST TNKS/PROPELL PRD	RI/FS						
		RD						
		RA(C)						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-050	FORMER REACT MTRS/RCKT FUEL TST A 1500	RI/FS						
		RD						
		RA(C)						
		LTM						

PICATINNY ARSENAL IRP Schedule

SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-057	PICATINNY LAKE (SITE 53)	RI/FS						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-058	600 HILL GROUNDWATER PLUME	RI/FS						
		RD						
		RA(C)						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-065	POST FARM LANDFILL (SITE 23)	LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-066	SANITARY LANDFILL(NEAR SITE 20)SITE 24	LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-067	SANITARY LANDFILL(NEAR SITE 26)SITE 25	LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-071	DRUM STRG AREA(B31 YARD) SITE 29	RI/FS						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-072	FORMER GAS STATION/ DRMO(SITE 31)	RA(O)						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-075	EQPMT & WASTE STORAGE IN 3000-AREA	RI/FS						
		RD						
		RA(C)						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-076	FORM METL PLATG WSTWTR FAC/LAGOONS B-24	RA(O)						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-077	Area E Groundwater (Site 38)	LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-079	ORDNANCE/EXPLOSIVE BLDGS 800 AREA	RA(O)						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-085	BLDS IN 500-AREA	RI/FS						
		RD						
		RA(C)						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-091	BLDGS IN 200-AREA	RI/FS						
		RD						
		RA(C)						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-093	WASTE BURIAL AREA NEAR SITES 19&34(180)	LTM						

PICATINNY ARSENAL IRP Schedule

SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-096	BLDG 22,PRECISION MACHINE SHOP(SITE 117)	LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-097	BLD 41,PESTICIDE STR & FORM OIL/W SEP	RI/FS						
		RD						
		RA(C)						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-102	FORMER WASTE DUMP/CHEMICAL LAB	LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-108	BLDGS in 400/300 AREA	RI/FS						
		RD						
		RA(C)						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-111	FORMER BLDG 435,PROPELLANT SOLV MIXING	RI/FS						
		RD						
		RA(C)						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-122	PROPELLANT TESTING (BLDG 197) SITE 126	RI/FS						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-134	R&D LAB/Chem Storage 3000-Area	RI/FS						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-135	BLDGS IN THE 900-AREA	RI/FS						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-136	HIGH PRESSURE BOILER (BLDG 3013) SITE 79	RI/FS						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-143	ORDNANCE FAC (BLDGS 717,722,732)SITE 108	LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-155	TECUP BUILDINGS SITE 178	RI/FS						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-162	SHELL BURIAL AREAS NEAR SITE 5	RI/FS						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-163	Propellnt/Rcket Prod 1300/1400 Area	RI/FS						
		LTM						

PICATINNY ARSENAL IRP Schedule

SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-171	ORDNANCE BLDG/EXPLOSIVES PROD.	RI/FS						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-175	ORDNANCE BLDGS in 600-AREA	RI/FS						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-184	BUILDINGS(1600,1601,1609,1610) SITE 94	RI/FS						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-192	APPLE TREES RECREATIONAL AREA	RI/FS						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-193	GREEN POND AND BEAR SWAMP BROOK SITE 190	LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-195	BLDGS IN 1400/1300/3100/1000 AREAS	RI/FS						
		RD						
		RA(C)						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-199	FORMER PISTOL RANGE DUMP&NAVY MANURE PIT	RI/FS						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-200	AREA (L) OTHER BUILDINGS	RI/FS						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-204	MID-VALLEY GROUNDWATER	RI/FS						
		RD						
		RA(C)						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-205	AREA B GROUNDWATER	RA(O)						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-206	AREA C GROUNDWATER	LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-209	BUILDING 167, LOCOMOTIVE AREA, BLDG. 430	RI/FS						
		LTM						

IRP Costs

Total Funding through FY 2004: \$88,203.0 K

Prior Funding

FY	Phase	Site ID	Obligations	FY Total
2005	IRA RA(C) RI	PICA-076	\$112.7 K	\$1,366.8 K
		PICA-193	\$15.5 K	
		PICA-001	\$8.0 K	
		PICA-022	\$8.0 K	
		PICA-058	\$284.7 K	
		PICA-069	\$8.0 K	
		PICA-071	\$5.0 K	
		PICA-079	\$5.0 K	
		PICA-096	\$165.9 K	
		PICA-097	\$5.0 K	
		PICA-098	\$5.0 K	
		PICA-102	\$5.0 K	
		PICA-108	\$48.0 K	
		PICA-111	\$255.6 K	
		PICA-114	\$5.0 K	
		PICA-122	\$5.0 K	
		PICA-136	\$13.0 K	
		PICA-143	\$6.0 K	
		PICA-155	\$10.0 K	
		PICA-158	\$10.0 K	
		PICA-171	\$30.0 K	
		PICA-175	\$3.0 K	
		PICA-184	\$3.0 K	
		PICA-190	\$5.0 K	
		PICA-192	\$53.2 K	
		PICA-199	\$5.0 K	
PICA-206	\$266.5 K			
PICA-209	\$2.7 K			
2006	RA(C) RI	PICA-057	\$5.0 K	\$13,335.2 K
		PICA-134	\$8.0 K	
		PICA-135	\$5.0 K	
		PBC	\$12,282.0 K	
		PICA-008	\$20.0 K	
		PICA-076	\$20.0 K	
		PICA-011	\$3.0 K	
		PICA-022	\$4.0 K	
		PICA-058	\$554.0 K	
		PICA-079	\$13.0 K	
PICA-102	\$13.0 K			
PICA-105	\$113.2 K			
PICA-111	\$15.0 K			

IRP Costs

		PICA-143	\$13.0 K	
		PICA-204	\$13.0 K	
		PICA-205	\$154.0 K	
		PICA-206	\$118.0 K	
2007	RA(C)	PBC at Picatinny	\$8,562.0 K	\$8,994.0 K
	RI/FS	PICA-001	\$5.0 K	
		PICA-006	\$5.0 K	
		PICA-008	\$5.0 K	
		PICA-011	\$10.0 K	
		PICA-015	\$5.0 K	
		PICA-022	\$10.0 K	
		PICA-057	\$20.0 K	
		PICA-058	\$86.0 K	
		PICA-072	\$10.0 K	
		PICA-077	\$5.0 K	
		PICA-091	\$10.0 K	
		PICA-093	\$10.0 K	
		PICA-111	\$85.0 K	
		PICA-155	\$10.0 K	
		PICA-206	\$156.0 K	
2008	LTM	PICA-111	\$257.0 K	\$1,096.0 K
		PICA-206	\$238.0 K	
		PICA-58	\$70.0 K	
	RAC	PBC Picatinny	\$501.0 K	
	RI/FS	PICA-111	\$10.0 K	
		PICA-206	\$10.0 K	
		PICA-58	\$10.0 K	
2009	LTM	PBC Picatinny	\$1,075.0 K	\$1,758.0 K
	RA(C)	PBC Picatinny	\$563.0 K	
	RI/FS	PICA-058	\$30.0 K	
		PICA-111	\$30.0 K	
		PICA-206	\$60.0 K	

TOTAL PRIOR FUNDING: \$114,753.0 K

Current Requirements

FY	Phase	Site ID	Requirements	FY Total
TOTAL CURRENT REQUIREMENTS:			\$0 K	

TOTAL FUTURE REQUIREMENTS: \$9,607.0 K



IRP Costs

TOTAL PROGRAM COST: \$124,360.0 K

Required Cost-to-Complete

SITE ID	SITE NAME	FY11	FY12	FY13	FY14	FY15	FY16	FY17	Out Yrs	Total
PBC Picatinny	PBC									
	RA(O)	2000	2000	225	100					4325
									Site Total	4325
PICA-001	INACTIVE TETRYL WASTE PITS (SITES 17/18)									
	RA(O)					12	13		41	66
	Soil Excavation, FS, GW Investigaion, and LUCs								Site Total	66
PICA-002	LOWER BURNING GROUND (SITE 34)									
	RA(O)					20	20		189	229
	Capping System, Maintenance, and LUCs								Site Total	229
PICA-006	GUNCOTTON LINE (SITE 16)									
	LTM					10	10		46	66
	FS and LUCs								Site Total	66
PICA-008	INACT. ROCKET FUEL TEST Areas									
	RA(O)					47	30		300	377
	Bioremediation, MNA, LTM, adn LUCs								Site Total	377
PICA-011	BLDG 60 SATELITE WSTE ACCOM AREA(SITE122									
	LTM					10	9		10	29
	FS and LUCs								Site Total	29
PICA-013	OPTS PROTO PROC FAC SITE BLDG 91(SITE78)									
	LTM					20	20		66	106
	FS, PP, ROD, MNA, and LTM								Site Total	106
PICA-015	LAKE DENMARK (SITE 54)									
	LTM					10	10		41	61
	FS, PP, ROD, LTM, and LUCs								Site Total	61
PICA-020	PYROTECHNIC DEMO AREA (SITE 19)									
	LTM					15	15		44	74
	LUCs								Site Total	74
PICA-022	POWER PLNT/HAZ WST TNKS/PROPELL PRD									
	LTM					10	10		39	59
	FS, PP, ROD, GW Monitoring, LTM, and LUCs								Site Total	59
PICA-050	FORMER REACT MTRS/RCKT FUEL TST A 1500									
	LTM					10	4		15	29
	FS and GW Monitoring								Site Total	29
PICA-057	PICATINNY LAKE (SITE 53)									
	LTM					10	11		40	61
	FS, PP, ROD, and LUCs								Site Total	61

Required Cost-to-Complete

SITE ID	SITE NAME		FY11	FY12	FY13	FY14	FY15	FY16	FY17	Out Yrs	Total
ACTIVITY	Phase										
PICA-058	600 HILL GROUNDWATER PLUME										
	RD	60									60
	RA(C)	22									22
	LTM	85		13	13	13	13	13		100	250
GW Investigation and LTM										Site Total	332
PICA-065	POST FARM LANDFILL (SITE 23)										
	LTM							20	6	30	56
GW Monitoring										Site Total	56
PICA-066	SANITARY LANDFILL(NEAR SITE 20)SITE 24										
	LTM							10	10	36	56
Cap Maintenance and LUCs										Site Total	56
PICA-067	SANITARY LANDFILL(NEAR SITE 26)SITE 25										
	LTM							12	12	50	74
LTM										Site Total	74
PICA-071	DRUM STRG AREA(B31 YARD) SITE 29										
	LTM							20	20	76	116
FS, PP, ROD, GW Monitoring, and LUCs										Site Total	116
PICA-072	FORMER GAS STATION/ DRMO(SITE 31)										
	RA(O)									164	164
Soil Excavation, GW Monitoring, and LUCs										Site Total	164
PICA-075	EQPMT & WASTE STORAGE IN 3000-AREA										
	LTM							5	5	19	29
FS, PP, ROD, Soil Excavation, Vegetative Cap, LTM, and LUCs										Site Total	29
PICA-076	FORM METL PLATG WSTWTR FAC/LAGOONS B-24										
	RA(O)									254	254
MNA, Compliance Sampling, and LUCs										Site Total	254
PICA-077	Area E Groundwater (Site 38)										
	LTM							15	15	44	74
MNA and LUCs										Site Total	74
PICA-079	ORDNANCE/EXPLOSIVE BLDGS 800 AREA										
	RA(O)							40	40	307	387
PP, ROD, Enhanced Bioremediation, MNA, Five Year Reviews, and LUCs										Site Total	387
PICA-085	BLDS IN 500-AREA										
	LTM							10	10	39	59
FS, PP, ROD, Soil Excavation, and LUCs										Site Total	59

Required Cost-to-Complete

SITE ID	SITE NAME		FY11	FY12	FY13	FY14	FY15	FY16	FY17	Out Yrs	Total
ACTIVITY	Phase										
PICA-091	BLDGS IN 200-AREA										
	LTM							10	10	38	58
	FS, PP, ROD, Vegetative Cover, and LUCs									Site Total	58
PICA-093	WASTE BURIAL AREA NEAR SITES 19&34(180)										
	LTM							8	8	30	46
	LUCs									Site Total	46
PICA-096	BLDG 22,PRECISION MACHINE SHOP(SITE 117)										
	LTM							20	20	76	116
	PP, ROD, and LUCs									Site Total	116
PICA-097	BLD 41,PESTICIDE STR & FORM OIL/W SEP										
	LTM									58	58
	FS, PP, ROD, and LUCs									Site Total	58
PICA-102	FORMER WASTE DUMP/CHEMICAL LAB										
	LTM							10	11	40	61
	LUCs									Site Total	61
PICA-108	BLDGS in 400/300 AREA										
	LTM							4	5	20	29
	FS, PP, ROD, and LUCs. Annual marsh monitoring.									Site Total	29
PICA-111	FORMER BLDG 435,PROPELLANT SOLV MIXING										
	RD	8									8
	RA(C)	6									6
	LTM		17			5	5	5		15	47
	FS, PP, ROD, and LUCs									Site Total	61
PICA-122	PROPELLANT TESTING (BLDG 197) SITE 126										
	LTM							5	5	19	29
	FS, PP, ROD, and LUCs									Site Total	29
PICA-134	R&D LAB/Chem Storage 3000-Area										
	LTM							5	5	19	29
	FS, PP, ROD, and LUCs									Site Total	29
PICA-135	BLDGS IN THE 900-AREA										
	LTM									58	58
	FS, PP, ROD, and LUCs									Site Total	58
PICA-136	HIGH PRESSURE BOILER (BLDG 3013) SITE 79										
	LTM							5	5	19	29
	FS, PP, ROD, Soil Excavation, and LUCs									Site Total	29

Required Cost-to-Complete

SITE ID	SITE NAME	Phase	FY11	FY12	FY13	FY14	FY15	FY16	FY17	Out Yrs	Total	
ACTIVITY												
PICA-143	ORDNANCE FAC (BLDGS 717,722,732)SITE 108											
	LTM							10	10	39	59	
	FS, PP, ROD, and LUCs										Site Total	59
PICA-155	TECUP BUILDINGS SITE 178											
	LTM							10	10	41	61	
	FS, PP, ROD, and LUCs										Site Total	61
PICA-162	SHELL BURIAL AREAS NEAR SITE 5											
	LTM							5	5	19	29	
	FS, PP, ROD, LTM, and LUCs										Site Total	29
PICA-163	Propellnt/Rcket Prod 1300/1400 Area											
	LTM							5	5	49	59	
	FS, PP, ROD, and LUCs										Site Total	59
PICA-171	ORDNANCE BLDG/EXPLOSIVES PROD.											
	LTM							7	8	44	59	
	FS, PP, ROD, and LUCs										Site Total	59
PICA-175	ORDNANCE BLDGS in 600-AREA											
	LTM							5	5	19	29	
	FS, PP, ROD, and LUCs										Site Total	29
PICA-184	BUILDINGS(1600,1601,1609,1610) SITE 94											
	LTM							10	10	40	60	
	FS, PP, ROD, and LUCs										Site Total	60
PICA-192	APPLE TREES RECREATIONAL AREA											
	LTM							5	5	49	59	
	FS, PP, ROD, and Cap Maintenance										Site Total	59
PICA-193	GREEN POND AND BEAR SWAMP BROOK SITE 190											
	LTM							5	5	46	56	
	Monitoring and LUCs										Site Total	56
PICA-195	BLDGS IN 1400/1300/3100/1000 AREAS											
	LTM							5	5	51	61	
	FS, PP, ROD, and LUCs										Site Total	61
PICA-199	FORMER PISTOL RANGE DUMP&NAVY MANURE PIT											
	LTM							5	5	49	59	
	FS, PP, ROD, Soil Excavation, Vegetative Cap, and LUCs										Site Total	59
PICA-200	AREA (L) OTHER BUILDINGS											
	LTM							5	5	18	28	
	FS, PP, ROD, and LUCs										Site Total	28

Required Cost-to-Complete

SITE ID	SITE NAME	FY11	FY12	FY13	FY14	FY15	FY16	FY17	Out Yrs	Total	
ACTIVITY	Phase										
PICA-204	MID-VALLEY GROUNDWATER										
	LTM					126	126		511	763	
	PP, ROD, In-well Stripping, MNA, and LUCs									Site Total	763
PICA-205	AREA B GROUNDWATER										
	LTM					15	15		64	94	
	Hydrogen Release Compound Injection and Monitoring									Site Total	94
PICA-206	AREA C GROUNDWATER										
	LTM				74	74	75		222	445	
	ROD, GW Monitoring, Well Abandonment, and Five Year Reviews									Site Total	445
PICA-209	BUILDING 167, LOCOMOTIVE AREA, BLDG. 430										
	LTM								29	29	
	FS, PP, ROD, and LUCs									Site Total	29
Totals		2181	2017	238	113	92	683	651	3632	9607	
	Site Total									9607	

Programmed Cost-to-Complete

SITE ID	SITE NAME	Phase	FY11	FY12	FY13	FY14	FY15	FY16	FY17	Out Yrs	Total
PBC Picatinny	PBC										
	RA(O)		2000	2000	225	100					4325
										Site Total	4325
PICA-001	INACTIVE TETRYL WASTE PITS (SITES 17/18)										
	RA(O)						12	13		41	66
	Soil Excavation, FS, GW Investigaion, and LUCs									Site Total	66
PICA-002	LOWER BURNING GROUND (SITE 34)										
	RA(O)						20	20		189	229
	Capping System, Maintenance, and LUCs									Site Total	229
PICA-006	GUNCOTTON LINE (SITE 16)										
	LTM						10	10		46	66
	FS and LUCs									Site Total	66
PICA-008	INACT. ROCKET FUEL TEST Areas										
	RA(O)						47	30		300	377
	Bioremediation, MNA, LTM, adn LUCs									Site Total	377
PICA-011	BLDG 60 SATELITE WSTE ACCOM AREA(SITE122										
	LTM						10	9		10	29
	FS and LUCs									Site Total	29
PICA-013	OPTS PROTO PROC FAC SITE BLDG 91(SITE78)										
	LTM						20	20		66	106
	FS, PP, ROD, MNA, and LTM									Site Total	106
PICA-015	LAKE DENMARK (SITE 54)										
	LTM						10	10		41	61
	FS, PP, ROD, LTM, and LUCs									Site Total	61
PICA-020	PYROTECHNIC DEMO AREA (SITE 19)										
	LTM						15	15		44	74
	LUCs									Site Total	74
PICA-022	POWER PLNT/HAZ WST TNKS/PROPELL PRD										
	LTM						10	10		39	59
	FS, PP, ROD, GW Monitoring, LTM, and LUCs									Site Total	59
PICA-050	FORMER REACT MTRS/RCKT FUEL TST A 1500										
	LTM						10	4		15	29
	FS and GW Monitoring									Site Total	29
PICA-057	PICATINNY LAKE (SITE 53)										
	LTM						10	11		40	61
	FS, PP, ROD, and LUCs									Site Total	61

Programmed Cost-to-Complete

SITE ID	SITE NAME		FY11	FY12	FY13	FY14	FY15	FY16	FY17	Out Yrs	Total	
ACTIVITY	Phase											
PICA-058	600 HILL GROUNDWATER PLUME											
	RD	60									60	
	RA(C)	22									22	
	LTM			13	13	13	13	13		185	250	
	GW Investigation and LTM										Site Total	332
PICA-065	POST FARM LANDFILL (SITE 23)											
	LTM							20	6		30	56
	GW Monitoring										Site Total	56
PICA-066	SANITARY LANDFILL(NEAR SITE 20)SITE 24											
	LTM							10	10		36	56
	Cap Maintenance and LUCs										Site Total	56
PICA-067	SANITARY LANDFILL(NEAR SITE 26)SITE 25											
	LTM							12	12		50	74
	LTM										Site Total	74
PICA-071	DRUM STRG AREA(B31 YARD) SITE 29											
	LTM							20	20		76	116
	FS, PP, ROD, GW Monitoring, and LUCs										Site Total	116
PICA-072	FORMER GAS STATION/ DRMO(SITE 31)											
	RA(O)										164	164
	Soil Excavation, GW Monitoring, and LUCs										Site Total	164
PICA-075	EQPMT & WASTE STORAGE IN 3000-AREA											
	LTM							5	5		19	29
	FS, PP, ROD, Soil Excavation, Vegetative Cap, LTM, and LUCs										Site Total	29
PICA-076	FORM METL PLATG WSTWTR FAC/LAGOONS B-24											
	RA(O)										254	254
	MNA, Compliance Sampling, and LUCs										Site Total	254
PICA-077	Area E Groundwater (Site 38)											
	LTM							15	15		44	74
	MNA and LUCs										Site Total	74
PICA-079	ORDNANCE/EXPLOSIVE BLDGS 800 AREA											
	RA(O)							40	40		307	387
	PP, ROD, Enhanced Bioremediation, MNA, Five Year Reviews, and LUCs										Site Total	387
PICA-085	BLDS IN 500-AREA											
	LTM							10	10		39	59
	FS, PP, ROD, Soil Excavation, and LUCs										Site Total	59

Programmed Cost-to-Complete

SITE ID	SITE NAME		FY11	FY12	FY13	FY14	FY15	FY16	FY17	Out Yrs	Total	
ACTIVITY	Phase											
PICA-091	BLDGS IN 200-AREA											
	LTM							10	10		38	58
	FS, PP, ROD, Vegetative Cover, and LUCs										Site Total	58
PICA-093	WASTE BURIAL AREA NEAR SITES 19&34(180)											
	LTM							8	8		30	46
	LUCs										Site Total	46
PICA-096	BLDG 22,PRECISION MACHINE SHOP(SITE 117)											
	LTM							20	20		76	116
	PP, ROD, and LUCs										Site Total	116
PICA-097	BLD 41,PESTICIDE STR & FORM OIL/W SEP											
	LTM										58	58
	FS, PP, ROD, and LUCs										Site Total	58
PICA-102	FORMER WASTE DUMP/CHEMICAL LAB											
	LTM							10	11		40	61
	LUCs										Site Total	61
PICA-108	BLDGS in 400/300 AREA											
	LTM							4	5		20	29
	FS, PP, ROD, and LUCs. Annual marsh monitoring.										Site Total	29
PICA-111	FORMER BLDG 435,PROPELLANT SOLV MIXING											
	RD	8										8
	RA(C)	6										6
	LTM		17			5	5	5			15	47
	FS, PP, ROD, and LUCs										Site Total	61
PICA-122	PROPELLANT TESTING (BLDG 197) SITE 126											
	LTM							5	5		19	29
	FS, PP, ROD, and LUCs										Site Total	29
PICA-134	R&D LAB/Chem Storage 3000-Area											
	LTM							5	5		19	29
	FS, PP, ROD, and LUCs										Site Total	29
PICA-135	BLDGS IN THE 900-AREA											
	LTM										58	58
	FS, PP, ROD, and LUCs										Site Total	58
PICA-136	HIGH PRESSURE BOILER (BLDG 3013) SITE 79											
	LTM							5	5		19	29
	FS, PP, ROD, Soil Excavation, and LUCs										Site Total	29

Programmed Cost-to-Complete

SITE ID	SITE NAME	Phase	FY11	FY12	FY13	FY14	FY15	FY16	FY17	Out Yrs	Total	
ACTIVITY												
PICA-143	ORDNANCE FAC (BLDGS 717,722,732)SITE 108											
	LTM							10	10		39	59
	FS, PP, ROD, and LUCs										Site Total	59
PICA-155	TECUP BUILDINGS SITE 178											
	LTM							10	10		41	61
	FS, PP, ROD, and LUCs										Site Total	61
PICA-162	SHELL BURIAL AREAS NEAR SITE 5											
	LTM							5	5		19	29
	FS, PP, ROD, LTM, and LUCs										Site Total	29
PICA-163	Propellnt/Rcket Prod 1300/1400 Area											
	LTM							5	5		49	59
	FS, PP, ROD, and LUCs										Site Total	59
PICA-171	ORDNANCE BLDG/EXPLOSIVES PROD.											
	LTM							7	8		44	59
	FS, PP, ROD, and LUCs										Site Total	59
PICA-175	ORDNANCE BLDGS in 600-AREA											
	LTM							5	5		19	29
	FS, PP, ROD, and LUCs										Site Total	29
PICA-184	BUILDINGS(1600,1601,1609,1610) SITE 94											
	LTM							10	10		40	60
	FS, PP, ROD, and LUCs										Site Total	60
PICA-192	APPLE TREES RECREATIONAL AREA											
	LTM							5	5		49	59
	FS, PP, ROD, and Cap Maintenance										Site Total	59
PICA-193	GREEN POND AND BEAR SWAMP BROOK SITE 190											
	LTM							5	5		46	56
	Monitoring and LUCs										Site Total	56
PICA-195	BLDGS IN 1400/1300/3100/1000 AREAS											
	LTM							5	5		51	61
	FS, PP, ROD, and LUCs										Site Total	61
PICA-199	FORMER PISTOL RANGE DUMP&NAVY MANURE PIT											
	LTM							5	5		49	59
	FS, PP, ROD, Soil Excavation, Vegetative Cap, and LUCs										Site Total	59
PICA-200	AREA (L) OTHER BUILDINGS											
	LTM							5	5		18	28
	FS, PP, ROD, and LUCs										Site Total	28

Programmed Cost-to-Complete

SITE ID	SITE NAME	FY11	FY12	FY13	FY14	FY15	FY16	FY17	Out Yrs	Total
PICA-204	MID-VALLEY GROUNDWATER									
	LTM						126	126		763
	PP, ROD, In-well Stripping, MNA, and LUCs								511	763
									Site Total	763
PICA-205	AREA B GROUNDWATER									
	LTM						15	15		94
	Hydrogen Release Compound Injection and Monitoring								64	94
									Site Total	94
PICA-206	AREA C GROUNDWATER									
	LTM					74	74	75		445
	ROD, GW Monitoring, Well Abandonment, and Five Year Reviews								222	445
									Site Total	445
PICA-209	BUILDING 167, LOCOMOTIVE AREA, BLDG. 430									
	LTM								29	29
	FS, PP, ROD, and LUCs									29
									Site Total	29
Totals										
		2096	2017	238	113	92	683	651		9607
									Site Total	9607

PICATINNY ARSENAL
Army Defense Environmental Restoration Program
Military Munitions Response Program

MMRP Summary

Installation Total Army Environmental Database-Restoration (AEDB-R) Sites/Closeout Sites Count: 15/4

Installation Site Types with Future and/or Underway Phases

11 Unexploded Munitions/Ordnance

(PBA@MR PICA, PICA-001-R-01, PICA-003-R-01, PICA-004-R-01, PICA-005-R-01, PICA-006-R-01, PICA-008-R-01, PICA-010-R-01, PICA-012-R-01, PICA-013-R-01, PICA-014-R-01)

Most Widespread Contaminants of Concern

Munitions and explosives of concern (MEC), Munitions constituents (MC)

Media of Concern

Groundwater, Sediment, Soil, Surface Water

Completed Remedial Actions (Interim Remedial Actions/ Final Remedial Actions (IRA/FRA))

Site ID	Site Name	Action	Remedy	FY	Cost
PICA-004-R-01	1926 EXPLOSION SITE-TD	IRA	UXO CLEARANCE	2009	TBD
PICA-004-R-01	1926 EXPLOSION SITE-TD	IRA	WASTE REMOVAL - SOILS	2009	TBD
PICA-007-R-01	Former-DRMO YARD	IRA	REMOVAL	2009	TBD

Total Environmental Restoration, Army (ER,A) Funding

Prior Funding: \$13,183.0 K

Current Requirements: \$.0 K

Future Requirements: \$68,923.0 K

Duration of MMRP

Date of MMRP Inception: 200212

Estimated Date for Remedy-In-Place (RIP)/Response Complete (RC): 201609/201609

Date of MMRP completion including Long Term Management (LTM): 205009

MMRP Contamination Assessment

Contamination Assessment Overview

An SI was initiated for all 11 sites in February 2006 and was completed in FY08. Munitions and explosives in the soil are a major concern.


Cleanup Exit Strategy

The SI and subsequent investigations will determine the cleanup strategy for each site. More than likely, all the sites will require an RI/FS, an RD, and a remedial action (construction) [RA(C)] for removal of soils and any explosives that are found. See the individual cleanup strategies for more detailed information.

MMRP Previous Studies

	Title	Author	Date
2003	Final US Army Closed, Transferring and Transferred Range/Site Inventory for Picatinny Arsenal, New Jersey	Malcolm Pirnie, Inc.	DEC-2003
2006	Final Historical Records Review, Picatinny Arsenal, New Jersey	Malcolm Pirnie, Inc.	DEC-2006
2007	Final Work Plan, Picatinny Arsenal, New Jersey	Malcolm Pirnie, Inc.	JUL-2007
	EE/CA Workplan	PIKA/MPI	DEC-2007
2008	Final Site Inspection, Picatinny Arsenal, New Jersey	Malcolm Pirnie, Inc.	MAY-2008
	Mount Hope Time Critical Removal Action Addendum	PIKA/MPI	JUN-2008
2009	Mount Hope Time Critical Removal Action Addendum	MPI	JAN-2009
2010	Engineering Evaluation/Cost Analysis Report	PIKA/MPI	JUN-2010
	TCRA Report for ICM removal	ARCADIS	AUG-2010

MMRP Installation Map(s)

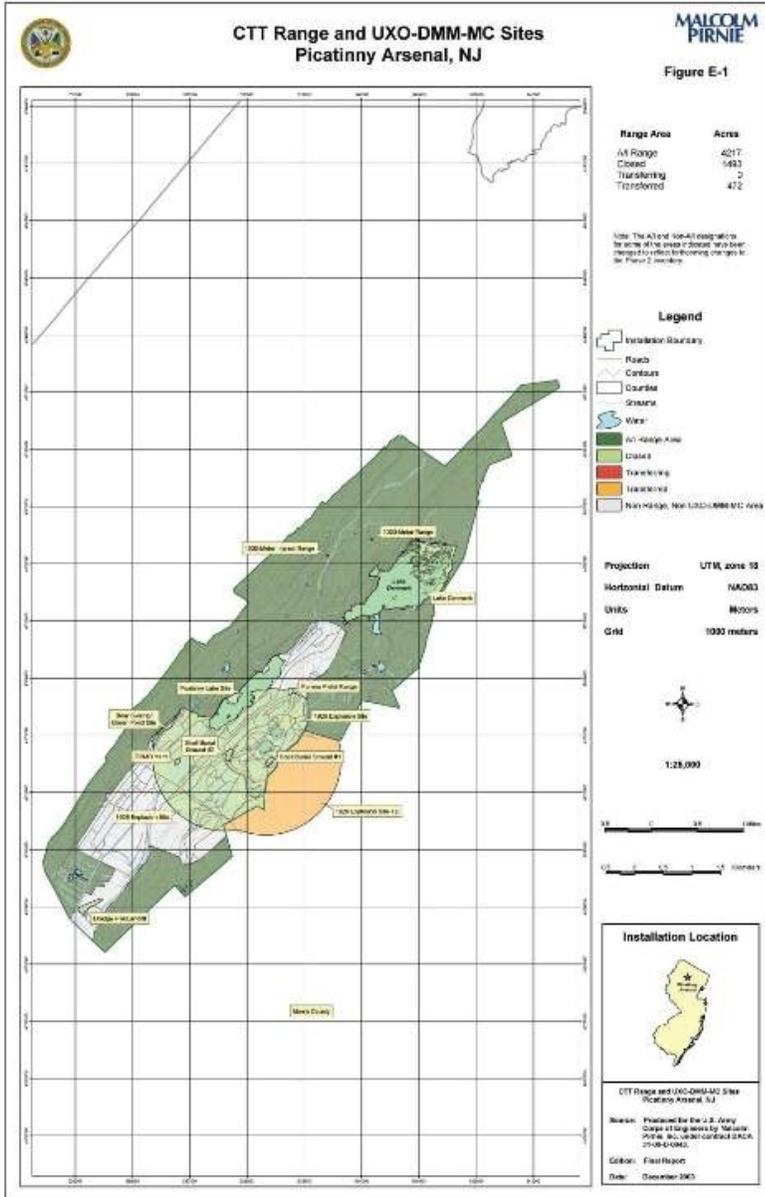

(this page intentionally left blank)

PICATINNY ARSENAL
Military Munitions Response Program
Site Descriptions

Site ID: PBA@MR PICA
Site Name: PBA for MR sites at Picatinny

STATUS

Regulatory Driver: CERCLA
MRSPP Score: 03

Phases	Start	End
PA.....	200401.....	200704
SI.....	200705.....	200905
RI/FS.....	200910.....	201509
RIP Date:	N/A	
RC Date:	201509	

SITE DESCRIPTION

This is a programmatic site that includes all the MMRP eligible sites including:
PICA-003-R-01: 1926 Explosion Radius as designated on the enclosed map
PICA-004-R-01: 1926 Explosion Site-TD
PICA-005-R-01: Green Pond
PICA-006-R-01: Former Operational Areas incorporating the essence of the Safety Designation enclosed map
PICA-007-R-01: Former DRMO Yard
PICA-008-R-01: Lakes as designated on the enclosed map
PICA-010-R-01: Shell Burial Grounds
PICA-014-R-01: Inactive Munitions Waste Pit TD

CLEANUP/EXIT STRATEGY

This site was created to track funds for the July 2010 USACE MAMS PBA contract. Post-PBA requirements for each site are tracked separately under each site in AEDB-R.

STATUS

Regulatory Driver: CERCLA
MRSPP Score: 05
Contaminants of Concern: Munitions and explosives of concern (MEC), Munitions constituents (MC)
Media of Concern: Groundwater, Soil

Phases	Start	End
PA.....	200212.....	200312
SI.....	200602.....	200805
RI/FS.....	200910.....	201509
RD.....	201310.....	201609
RA(C).....	201510.....	201609
LTM.....	201610.....	205009
RIP Date:	N/A	
RC Date:	201609	

SITE DESCRIPTION

This munitions response site (MRS) covers approximately 25 acres and is located northwest of Lake Denmark in the northern half of the installation. This range consists of one firing point with two lines of fire, 900-yard and 500-meter, and was reportedly used as a recoilless rifle range for large diameter projectiles. Two buildings (Buildings 1240 and 1243), a berm, and a gun turret were located at the firing point. One building (Building 1242A) was also located at the impact area of the 900-yard range. The site was in use from 1964 to sometime between 1989 and 1991. Aerial photographs from 1940 and 1951 show the site as completely undeveloped and heavily wooded. No information was available to indicate which weapons systems were used on-site; however, the 57mm M18, 75mm M20, 90mm M67, 105mm M27, and 106mm M40 recoilless rifles were in use during the time frame this range was operated. There was also no information detailing specific munitions fired on the range, the configuration of the munitions, or how the range was used.

Based on the Final Historical Records Review (HRR) dated November 2006, the MRS PICA-001-R-01 (previously known as the 1000 Meter Impact Range) and PICA-002-R-01 (previously known as the 1000 Meter Impact Area) were combined into MRS PICA-001-R-01 and had the site name changed to 'Former Munitions and Propellant Test Area' in order to be more descriptive of actual site operations. Additionally, no munitions constituent (MC) estimated because it is being addressed under the IRP.

The RI contract was funded in FY10 and is tracked under PBA@MR PICA. It is scheduled to be implemented in the next five years.

CLEANUP/EXIT STRATEGY

The SI was completed in FY08. The Army prepared a Remedial Action Cost Engineering and Requirements (RACER) estimate to address potential RAs needed following the completion of the SI. The estimate assumes the following MEC actions will be completed:

- an RD,
- MEC site characterization and removal assessment (SC&RA),
- MEC removal action,
- MEC ICs, and
- MEC monitoring.

There are no MC actions because MC is being addressed under the IRP.

Site ID: PICA-003-R-01

Site Name: 1926 Explosion Radius

STATUS

Regulatory Driver: CERCLA
MRSPP Score: 03
Contaminants of Concern: Munitions and explosives of concern (MEC), Munitions constituents (MC)
Media of Concern: Groundwater, Soil

Phases	Start	End
PA.....	200212.....	200312
SI.....	200602.....	200805
RI/FS.....	200910.....	201509
RD.....	201310.....	201609
IRA.....	200708.....	201309
RA(C).....	201510.....	201609
LTM.....	201610.....	205009
RIP Date:	N/A	
RC Date:	201609	

SITE DESCRIPTION

This MRS includes the on-post area affected by the explosion of the Lake Denmark Naval Ammunition Depot in 1926. The 1926 Explosion Radius MRS consists of the explosion center and the area within a one-mile radius, minus off-post property, areas that fall on operational ranges, areas that fall on surface danger zones (SDZs) for operational ranges where there is the potential for an ongoing release of MEC due to the use of the range, and areas identified as separate MRSs. Thus, the 1926 Explosion Radius MRS consists of 1,562 acres.

The Lake Denmark Naval Ammunition Depot, which was located on what is currently the eastern portion of PTA, near Picatinny Lake, was used by the Navy from the late 1800s to the 1960s, mainly for storage of materials such as HEs, smokeless powder, black powder, and projectiles. On July 10, 1926, lightning struck the southwest end of the depot, setting off a series of explosions. According to an historical report, an estimated 2.5 million pounds of explosives detonated in the explosion, including: TNT, 25-pound Navy Marck I bombs, Marck II bombs, Marck III, Marck IV aircraft bombs, Marck V bombs, bomb accessories (e.g., fins, tails), aerial bombs, 14-inch Class "B", 14-in armor piercing (AP) rounds, and five-inch and eight-inch shells.

Based on the final SI dated April 2008, the following HRR MRSs were consolidated into this MRS: 1926 Explosion Radius (PICA-003-R-01), Former DRMO Yard, and Former Burning Ground (PICA-007-R-01), and Former Projectile Range (site ID: N/A).

In 2008 an EE/CA was conducted at six locations within the 1926 Explosion Site Radius MRS. The investigated areas included the RCI Military Housing Project (Navy Hill Housing, Fisher's Pond, and Farley Avenue), childcare development center (CDC), electromagnetic research facility (ERF), and packaging, handling, storage, and transportation Center (PHS&T). A total of 45 MEC items and 6380 pounds of munitions debris (MD) items were found throughout the six investigated areas.

The EE/CA for the RCI (Navy Hill Housing, Fisher's Pond, and Farley Avenue), CDC, ERF, and PHS&T was approved. A public notice is expected to implement the required actions.

The RI contract was funded in FY10. It is scheduled to be implemented in the next five years.

CLEANUP/EXIT STRATEGY

The SI was completed in FY08. The Army prepared a RACER estimate to address potential RAs needed following the completion of the SI. The estimate assumes the following MC/MEC actions will be completed: RI/FS (without groundwater monitoring because it is being addressed under the IRP), RD, IRA (UXO construction support), MC removal action, MEC SC&RA, MEC removal action, MEC ICs, and MEC monitoring.

EE/CA UXO constructions support is needed on an ongoing basis as required for MCA, BRAC, and stimulus construction. UXO

Site ID: PICA-003-R-01
Site Name: 1926 Explosion Radius

construction support is tracked in AEDB-R under the IRA phase.

An IRA was conducted at PICA-007-R-01; however, because PICA-007-R-01 was combined with PICA-003-R-01 in the SI, all future requirements associated with PICA-007-R-01 are tracked under PICA-003-R-01.

Site ID: PICA-004-R-01
Site Name: 1926 EXPLOSION SITE-TD

STATUS

Regulatory Driver: CERCLA
MRSPP Score: 03
Contaminants of Concern: Munitions and explosives of concern (MEC), Munitions constituents (MC)
Media of Concern: Groundwater, Soil

Phases	Start	End
PA.....	200212.....	200312
SI.....	200602.....	200805
RI/FS.....	200910.....	201209
RD.....	201210.....	201309
IRA.....	200711.....	201309
RA(C).....	201410.....	201609
LTM.....	202010.....	205009
RIP Date:	N/A	
RC Date:	201609	

SITE DESCRIPTION

This MRS consists of all off-post properties that fall within a one-mile (1,609 meters) radius of the explosion center of the 1926 explosion (PICA-003-R-01). The 1926 Explosion Site off-post consists of vacant land and commercial property, including the Mt. Hope Quarry, which covers the largest area of this MRS. The quarry is located adjacent to PTA on the eastern side of the fence line that marks the installation boundary. This MRS consists of 833 acres.

Review of recent aerial photographs shows the active quarry face to currently be approximately 700 feet (213 meters) from the fence line and approximately 1,100 feet (325 meters) from the closest shell burial area, which represents the closest former crater from the 1926 explosion. Over the past four years, which is how long explosive ordnance disposal (EOD) records are kept, several MEC finds were made at the quarry; all of the items found were manufactured prior to 1926. After the HRR began, the frequency of the MEC finds at the quarry increased; this is assumed to be related to the quarry's active face moving toward PTA. As a result, from December 2006 to March 2007, a TCRA was performed for 22.6 acres of the quarry, which was the area identified by the quarry manager as planned rock blast and processing areas. The purpose of the TCRA was to significantly reduce the imminent safety hazard presented to the Mt. Hope Quarry employees.

In spring 2008 TCRA activities were conducted on an additional 22 acres at Mt. Hope Quarry as the operational area at the quarry expanded. During the second phase of the TCRA, 130 MD items were uncovered and removed from the site.

Based on recent conversations with Mt. Hope Quarry, an additional TCRA is planned and funded for FY09.

The third TCRA was implemented in 2010.

The RI contract was funded in FY10. It is scheduled to be implemented in the next five years.

CLEANUP/EXIT STRATEGY

The SI was completed in FY08. The Army prepared a RACER estimate to address potential RAs needed following the completion of the SI. The estimate assumes the following MC/MEC actions will be completed:

- an RI/FS,
- IRAs,
- an RD,
- groundwater monitoring wells,
- a MC removal action,
- a MEC SC&RA,
- a MEC removal action,

Site ID: PICA-004-R-01
Site Name: 1926 EXPLOSION SITE-TD

- MEC ICs, and
- MEC monitoring.

As operations at Mt. Hope Quarry expand to new areas on-site, additional cleanup support will be addressed by the Army. IRAs (MEC removal following the planned 2009 TCRA) are planned for FY10 through FY13.

STATUS

Regulatory Driver: CERCLA
 MRSPP Score: 03
 Contaminants of Concern: Munitions and explosives of concern (MEC), Munitions constituents (MC)
 Media of Concern: Sediment, Surface Water

Phases	Start	End
PA.....	200212.....	200312
SI.....	200602.....	200805
RI/FS.....	200910.....	201509
RD.....	201310.....	201609
RA(C).....	201510.....	201609
LTM.....	201610.....	205009
RIP Date:	N/A	
RC Date:	201609	

SITE DESCRIPTION

The Green Pond MRS, which covers approximately 1.1 acres, consists of the portion of GPB located south of the 9th Street bridge and north of the boundary of the former DRMO Yard. Since this MRS is a brook, it is possible that the stream channel and banks may be altered due to erosion and deposition. Therefore, this MRS extends from bank to bank, regardless of stream morphology, and includes a 15-foot buffer zone on each side of the banks. The Green Pond MRS lies entirely within the limits of the 1926 Explosion Radius MRS. GPB, which is approximately 22,400 linear feet (6,828 meters), flows southwest from the outfall of Picatinny Lake through the center of the installation. MEC have been found protruding from the banks and buried alongside the banks of GPB, although the source of the MEC is unknown.

The site is associated with two AEDB-R sites, PICA-193 and PICA-194. PICA-194 was combined with PICA-193 and both are being addressed under PICA-193. The cost-to-complete (CTC) does not cover all MEC/MC, discarded military munitions (DMM), and MC for all the phases. Various investigations have taken place at the site since 1983. During the last investigation in 1999, the concentrations of VOCs, pesticides, SVOCs, PCBs, explosives, and metals exceeded LOCs for surface waters. The concentrations of VOCs, SVOCS, PCBs, pesticides and metals exceeded the LOCs for sediments. Contaminated sediments are to be dredged. Whether the metals are linked to MC or not is unknown.

Based on the Final SI dated April 2008, the site name was changed from the Bear Swamp/Green Pond Site to the Green Pond site in order to be more descriptive of actual site operations. Additionally, the cost associated with MC is not estimated because it is being addressed under the IRP.

The RI contract was funded in FY10. It is scheduled to be implemented in the next five years.

CLEANUP/EXIT STRATEGY

The SI was completed in FY08. The Army prepared a RACER estimate to address potential RAs needed following the completion of the SI. The estimate assumes the following MEC actions will be completed:

- an RD,
- MEC SC&RA,
- MEC removal action,
- MEC ICs, and
- MEC monitoring.

No MC actions are included because they are being addressed under the IRP.

Site ID: PICA-006-R-01
Site Name: Former Operational Areas

STATUS

Regulatory Driver: CERCLA
MRSPP Score: 03
Contaminants of Concern: Munitions and explosives of concern (MEC), Munitions constituents (MC)
Media of Concern: Groundwater, Soil

Phases	Start	End
PA.....	200212.....	200312
SI.....	200602.....	200805
RI/FS.....	200910.....	201509
RD.....	201310.....	201609
IRA.....	200810.....	201309
RA(C).....	201510.....	201609
LTM.....	201610.....	205009
RIP Date:	N/A	
RC Date:	201609	

SITE DESCRIPTION

This MRS covers approximately 1,977 acres and consists of all areas of the installation south of Shinkle Road that are other than operational ranges, do not fall within an SDZ for operational ranges with the potential for ongoing releases of MEC, and have not already been identified as an MRS. Throughout the years there have been numerous UXO items found throughout the entire Former Operational Areas MRS. Why these items are present is unknown; however, according to an installation survey report, in 1973 PTA used 2,036 acres for R&D and testing.

A dredge pile and a former sanitary landfill, which cover approximately 13 acres, are located on the southern portion of this MRS. The dredge pile lies entirely within the limits of the landfill and both the dredge pile and landfill are reported MEC disposal areas. According to several reports, shells were disposed of in the sanitary landfill. In addition, dredge spoils from GPB were reportedly placed at this location and GPB was dredged due to the presence of shells. In interviews with PTA personnel and contractors, it was noted that MEC were identified during utility trenching operations in the landfill. An explosive, NC, has been found in numerous soil and groundwater samples collected from both areas.

A waste burial area that covers approximately 8.5 acres is also located at the southern end of this MRS. The waste burial area was used as an unregulated disposal area and consists of undeveloped land in a low-lying wetland. The exact years of operation are unknown; however, extensive landfilling activities are believed to have occurred in the 1960s and 1970s. During a site walk in January 1998, MD, identified as large projectiles, were observed in this area; no base plates or fuses/nose plugs appeared to be installed on these projectiles. In addition, 40mm grenades were found in trenches installed under the IRP.

The site is associated with two AEDB-R sites, PICA-068 and PICA-067. PICA-068 was closed and any issues arising from the site addressed under PICA-067. The CTC does not cover all ordnance/explosive (OE) for all the phases. Previous investigations have determined that the contaminants of concern are metals, SVOCs, pesticides and PAHs. Contaminated soil will be removed from the site and potential groundwater concerns addressed under PICA-206. Whether the metals are linked to MC or not is unknown.

Based on the final SI dated April 2008, the following HRR MRSs were consolidated into this MRS:
- Dredge Pile and Former Sanitary Landfill (PICA-006-R-01),
- Former Operation Area South (Site ID: N/A), and
- Waste Burial Area Near Sites 19 and 34 (Site ID: N/A).

Additionally, based on research conducted during the HRR that indicated that the name was no longer applicable, the site name for this MRS changed from Dredge Pile/Landfill to Former Operational Areas.

The RI contract was funded in FY10. It is scheduled to be implemented in the next five years.

Site ID: PICA-006-R-01
Site Name: Former Operational Areas

CLEANUP/EXIT STRATEGY

The SI was completed in FY08. The Army prepared a RACER estimate to address potential RAs needed following the completion of the SI. The estimate assumes the following MC/MEC actions will be completed: RI/FS (without groundwater monitoring because it is addressed under the IRP), RD, IRA (UXO construction support), MC removal action, MEC SC&RA, MEC removal action, MEC ICs, and MEC monitoring.

EE/CA UXO constructions support is needed on an ongoing basis as required for MCA, BRAC, and stimulus construction. UXO construction support is tracked in AEDB-R under the IRA phase.

STATUS

Regulatory Driver: CERCLA
 MRSP Score: 04
 Contaminants of Concern: Munitions and explosives of concern (MEC), Munitions constituents (MC)
 Media of Concern: Sediment, Surface Water

Phases	Start	End
PA.....	200212.....	200312
SI.....	200602.....	200805
RI/FS.....	200910.....	201209
RD.....	201310.....	201609
IRA.....	200811.....	201309
RA(C).....	201510.....	201609
LTM.....	201610.....	205009
RIP Date:	N/A	
RC Date:	201609	

SITE DESCRIPTION

There are two large lakes on PTA that were historically used as ranges: Lake Denmark and Picatinny Lake. Although they are not adjacent to each other, these two lakes were consolidated into one MRS since the conceptual site models (CSMs) for both lakes are very similar. This MRS covers 758 acres and includes the lakes as well as the on-post land portions covered by the SDZs associated with the ranges.

Lake Denmark, which covers approximately 633 acres, is located on the northeastern portion of the installation. It is a man-made lake with an approximate surface area of 263 acres and an average depth of 6.5 feet. The lake is not used as a source of drinking water, but is used for recreational boating and fishing. Swimming in Lake Denmark is banned and fish consumption advisories are in effect. Previously, the lake was used as a mortar impact area and an experimental munitions testing range. Three ranges, 60mm, 81mm, and 4.2-inch inert projectile ranges, were identified. These ranges shared a single firing point on the southern end of the lake, but had several lines of fire. Several impact areas were located on the northern end of the lake. A 20mm cannon range that fired across Lake Denmark toward an impact area near Building 1221 was also identified.

Picatinny Lake covers approximately 125 acres and is located in the central portion of the installation. It also is an artificial lake with an approximate surface area of 108 acres, a flat, featureless bottom, and a maximum depth of 20 feet, with more shallow depths at the northern end. Picatinny Lake is used for recreational boating and fishing; however, swimming is banned and fish consumption advisories are in effect. Picatinny Lake is also used as a source of non-potable water for production purposes and fire fighting. There are two islands within Picatinny Lake; Flare Island, which is an artificial peninsula constructed of coal slag and Picnic Island, located in the southern portion of the lake. There is no historical evidence of former munitions testing conducted on Picnic Island. Picatinny Lake has had several uses, including a range and a testing and storage area. A three-inch Barbette gun firing range was previously located on the southeast shore of the lake; the impact area was located across the lake near Buildings 810 and 824. Flare Island, an artificial island, was formerly used to test flares and pyrotechnics. The lake was also used for the underwater storage of smokeless powder and explosives.

The site is associated with AEDB-R site PICA-015. The CTC does not cover all MEC for all the phases. Previous investigations on surface waters and sediments indicated the presence of metals in concentrations above LOCs. The AEDB-R description sheet indicated that ICs would be recommended for this site. Whether the metals are linked to MEC or not is unknown.

Based on the final SI in April 2008, the HRR MRSs for Lake Denmark (PICA-008-R-01, which is the on-post portion) and Picatinny Lake Site (PICA-009-R-01) were consolidated into this MRS. Additionally, in order to describe actual site operations at both areas since their CSMs are very similar, the site name for this MRS changed to Lakes MRS. MC is not estimated because it is being addressed under the IRP.

The RI contract was funded in FY10. It is scheduled to be implemented in the next five years.

CLEANUP/EXIT STRATEGY

The SI was completed in FY08. The Army prepared a RACER estimate to address potential RAs needed following the completion of the SI. The estimate assumes the following MEC actions will be completed:

- an RD,
- an IRA (UXO construction support),
- MEC SC&RA,
- a MEC removal action,
- MEC ICs, and
- MEC monitoring.

EE/CA UXO constructions support is needed on an ongoing basis as required for MCA, BRAC, and stimulus construction. UXO construction support is tracked in AEDB-R under the IRA phase.

There are no MC actions because they are being addressed under the IRP.

Site ID: PICA-010-R-01
Site Name: Shell Burial Grounds

STATUS

Regulatory Driver: CERCLA
MRSPP Score: 05
Contaminants of Concern: Munitions and explosives of concern (MEC), Munitions constituents (MC)
Media of Concern: Groundwater, Soil

Phases	Start	End
PA.....	200212.....	200312
SI.....	200602.....	200805
RI/FS.....	200910.....	201509
RD.....	201310.....	201609
RA(C).....	201510.....	201609
LTM.....	201610.....	205009
RIP Date:	N/A	
RC Date:	201609	

SITE DESCRIPTION

During the explosion in 1926, three craters were formed; two are adjacent to one another. These three craters formed two burial grounds (one on the southeastern portion of the installation near Building 3150 and another on the southern portion of the installation near Building 3100) that were used for the disposal of approximately 25 tons of explosives from the explosion. Although the two burial grounds are not adjacent to each other, they were consolidated into one MRS since their CSMs are the same.

The burial ground near Building 3150 covers approximately 1.5 acres and is located near the southeastern installation boundary while the other burial ground near Building 3100 covers approximately four acres and is located in the southern half of the installation. Materials that were disposed of at these burial grounds include projectiles, mines, depth charges, fuses, explosives, small arms ammunition, propellants, and, possibly, rocket fuels. It was also reported that the site potentially contains acids, pickling liquors, cyanide, and phenol. The Navy continued to use these areas for explosives disposal until 1945; no records of the types of material or amounts disposed of were kept. After the Navy discontinued its use of these areas, they were covered with 20 feet of fill. Currently, ICs exist for both burial grounds as they are fenced in and posted with warning signs.

The site is associated with AEDB-R site, PICA-162. Previous investigations conducted from 1998 to 2000 indicated that cyanide and VOCs were detected in the groundwater at concentrations exceeding LOCs. Whether the metals are linked to MEC or not is unknown.

Based on the final SI dated April 2008, the following HRR MRSs were consolidated into this MRS: Shell Burial Ground No. 1 (PICA-010-R-01, this is near Building 3150) and Shell Burial Ground No. 2 (PICA-011-R-01, near Building 3100). Additionally, the site name for this MRS changed to Shell Burial Grounds in order to describe actual site operations at both areas since their CSMs are the same. No MC estimated because it is being addressed under the IRP.

The RI contract was funded in FY10. It is scheduled to be implemented in the next five years.

CLEANUP/EXIT STRATEGY

The SI was completed in FY08. The Army prepared a RACER estimate to address potential RAs needed following the completion of the SI. The estimate assumes the following MEC actions will be completed:

- an RD,
- MEC SC&RA,
- a MEC removal action,
- MEC ICs, and
- MEC monitoring.

Site ID: PICA-010-R-01
Site Name: Shell Burial Grounds

There are no MC actions because they are being addressed under the IRP.

Site ID: PICA-012-R-01
Site Name: Lake Denmark - Off-Post

STATUS

Regulatory Driver: CERCLA
MRSPP Score: 05
Contaminants of Concern: Munitions and explosives of concern (MEC), Munitions constituents (MC)
Media of Concern: Groundwater, Soil

Phases	Start	End
PA.....	200212.....	200312
SI.....	200602.....	200805
RI/FS.....	200910.....	201509
RD.....	201310.....	201609
RA(C).....	201510.....	201609
LTM.....	201610.....	205009
RIP Date:	N/A	
RC Date:	201609	

SITE DESCRIPTION

This MRS covers approximately 96 acres and consists of all off-post property that falls within the safety fan of the Lake Denmark ranges. This site contains commercial/light industrial properties and vacant land; the largest property associated with the Lake Denmark Off-Post MRS is Radiation Technologies, Inc. (RTI), a Superfund Site.

According to the USEPA's website, the RTI Superfund Site occupies 263 acres immediately adjacent to PTA's boundary near Lake Denmark. Past activities at RTI included testing and development of rocket engines and propellants. One of the contaminants of concern associated with the RTI site is perchlorate, which has been found in groundwater. Investigation and cleanup activities at this site are ongoing. Currently, the former RTI facility is leased by Sterigenics, a global company that provides sterilization and ionization services for the healthcare, food safety, and advanced applications industries. According to the Sterigenics website, the Sterigenics operation in Rockaway Township is a gamma facility.

CLEANUP/EXIT STRATEGY

The SI was completed in FY08. The Army prepared a RACER estimate to address potential RAs needed following the completion of the SI. The estimate assumes the following MC/MEC actions will be completed:

- an RI/FS,
- an RD,
- an MC removal action,
- MEC SC&RA,
- a MEC removal action,
- MEC ICs, and
- MEC monitoring.

Site ID: PICA-013-R-01

Site Name: Inactive Munitions Waste Pit

STATUS

Regulatory Driver: CERCLA
MRSPP Score: 04
Contaminants of Concern: Munitions and explosives of concern (MEC), Munitions constituents (MC)
Media of Concern: Groundwater, Soil

Phases	Start	End
PA.....	200212.....	200312
SI.....	200602.....	200805
RI/FS.....	200910.....	201509
RD.....	201310.....	201609
RA(C).....	201510.....	201609
LTM.....	201610.....	205009
RIP Date:	N/A	
RC Date:	201609	

SITE DESCRIPTION

This MRS, which covers approximately 94 acres, is located northwest of the northernmost end of Picatinny Lake, near the installation boundary. This site contains a range and the associated SDZ. A portion of the SDZ falls off post and is tracked separately in AEDB-R as the Inactive Munitions Waste Pit - Off-Post MRS (PICA-014-R-01). It was reported that this site was used from 1955 to the mid-1980s for the testing and storage of munitions and explosives. Based on information contained in the RI concept plan the Inactive Munitions Waste Pit appears to have consisted of an open field with a burn cage, a gun turret, and a building (Building 656). Whether or not all of these structures were present throughout the site's operation is unknown. Although the site name suggests that materials may have been buried in pits, site features or other evidence have been identified indicating that burial of munitions took place have been identified. In the 1980s the site was covered with topsoil and sand, and in the late 1990s, the majority of the site was covered with fill and rock. A review of recent aerial photographs confirms that fill material up to 12 feet thick is present at the site.

The RI contract was funded in FY10 and is tracked under PBA@MR PICA. It is scheduled to be implemented in the next five years.

CLEANUP/EXIT STRATEGY

The SI was completed in FY08. The Army prepared a RACER estimate to address potential RAs needed following the completion of the SI. The estimate assumes the following MC/MEC actions will be completed:

- an RI/FS (without groundwater monitoring because it is being addressed under the IRP),
- an RD,
- an MC removal action,
- MEC SC&RA,
- a MEC removal action,
- MEC ICs, and
- MEC monitoring.

Site ID: PICA-014-R-01
Site Name: Inactive Munitions Waste Pit - TD

STATUS

Regulatory Driver: CERCLA
MRSPP Score: 04
Contaminants of Concern: Munitions and explosives of concern (MEC), Munitions constituents (MC)
Media of Concern: Groundwater, Soil

Phases	Start	End
PA.....	200212.....	200312
SI.....	200602.....	200805
RI/FS.....	200910.....	201509
RD.....	201310.....	201609
RA(C).....	201510.....	201609
LTM.....	201610.....	205009
RIP Date:	N/A	
RC Date:	201609	

SITE DESCRIPTION

This MRS covers 7.5 acres and consists of all off-post property that falls within the SDZ of the Inactive Munitions Waste Pit MRS (i.e., within a 1,250-foot radius from the center of the inactive munitions waste pit MRS).

The RI contract was funded in FY10. It is scheduled to be implemented in the next five years.

CLEANUP/EXIT STRATEGY

The SI was completed in FY08. The Army prepared a RACER estimate to address potential RAs needed following the completion of the SI. The estimate assumes the following MC/MEC actions will be completed:

- an RI/FS,
- an RD,
- an MC removal action,
- MEC SC&RA,
- a MEC removal action,
- MEC ICs, and
- MEC monitoring.

Site Closeout (No Further Action) Summary

Site ID	Site Name	NFA Date	Documentation
PICA-002-R-01	1000-METER RANGE	200803	Based on the Final HRR dated November 2006, this MRS has been consolidated with site PICA-001-R-01. As such, this MRS is Response Complete.
PICA-007-R-01	Former-DRMO YARD	200909	Site combined with PICA-004-R-01. Only opened temporarily to fund the ICM cleanup within the site.
PICA-009-R-01	PICATINNY LAKE SITE	200803	Based on the Stakeholder Draft SI dated November 2007, this MRS has been consolidated with site PICA-008-R-01. As such, this MRS is Response Complete.
PICA-011-R-01	SHELL BURIAL GROUND #2	200803	Based on the Stakeholder Draft SI dated November 2007, this MRS has been consolidated with site PICA-010-R-01. As such, this MRS is Response Complete.

MMRP Schedule

Date of MMRP Inception: 200212

Past Phase Completion Milestones

2004

PA (PICA-001-R-01 - Former Munitions & Propellant Test Area, PICA-002-R-01 - 1000-METER RANGE, PICA-003-R-01 - 1926 Explosion Radius, PICA-004-R-01 - 1926 EXPLOSION SITE-TD, PICA-005-R-01 - Green Pond, PICA-006-R-01 - Former Operational Areas, PICA-007-R-01 - Former-DRMO YARD, PICA-008-R-01 - Lakes, PICA-009-R-01 - PICATINNY LAKE SITE, PICA-010-R-01 - Shell Burial Grounds, PICA-011-R-01 - SHELL BURIAL GROUND #2, PICA-012-R-01 - Lake Denmark - Off-Post, PICA-013-R-01 - Inactive Munitions Waste Pit, PICA-014-R-01 - Inactive Munitions Waste Pit - TD)

2007

PA (PBA@MR PICA - PBA for MR sites at Picatinny)

2008

SI (PICA-001-R-01 - Former Munitions & Propellant Test Area, PICA-003-R-01 - 1926 Explosion Radius, PICA-004-R-01 - 1926 EXPLOSION SITE-TD, PICA-005-R-01 - Green Pond, PICA-006-R-01 - Former Operational Areas, PICA-007-R-01 - Former-DRMO YARD, PICA-008-R-01 - Lakes, PICA-010-R-01 - Shell Burial Grounds, PICA-012-R-01 - Lake Denmark - Off-Post, PICA-013-R-01 - Inactive Munitions Waste Pit, PICA-014-R-01 - Inactive Munitions Waste Pit - TD)

2009

SI (PBA@MR PICA - PBA for MR sites at Picatinny)

IRA (PICA-007-R-01 - Former-DRMO YARD)

Additional Past Phase Completion Milestones

EE/CA Report for RCI, CDC, and various BRAC footprints

Projected Phase Completion Milestones

See attached schedule

Projected Record of Decision (ROD)/Decision Document (DD) Approval Dates

Site ID	Site Name	ROD/DD Title	ROD/DD Date
---------	-----------	--------------	-------------

Final RA(C) Completion Date: 201609

Schedule for Next Five-Year Review: 2011

Estimated Completion Date of MMRP at Installation (including LTM phase): 205009

PICATINNY ARSENAL MMRP Schedule

= phase underway

SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PBA@MR PICA	PBA for MR sites at Picatinny	RI/FS						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-001-R-01	Former Munitions & Propellant Test Area	RI/FS						
		RD						
		RA(C)						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-003-R-01	1926 Explosion Radius	RI/FS						
		RD						
		IRA						
		RA(C)						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-004-R-01	1926 EXPLOSION SITE-TD	RI/FS						
		RD						
		IRA						
		RA(C)						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-005-R-01	Green Pond	RI/FS						
		RD						
		RA(C)						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-006-R-01	Former Operational Areas	RI/FS						
		RD						
		IRA						
		RA(C)						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-008-R-01	Lakes	RI/FS						
		RD						
		IRA						
		RA(C)						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-010-R-01	Shell Burial Grounds	RI/FS						
		RD						
		RA(C)						
		LTM						

PICATINNY ARSENAL MMRP Schedule

SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-012-R-01	Lake Denmark - Off-Post	RI/FS						
		RD						
		RA(C)						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-013-R-01	Inactive Munitions Waste Pit	RI/FS						
		RD						
		RA(C)						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
PICA-014-R-01	Inactive Munitions Waste Pit - TD	RI/FS						
		RD						
		RA(C)						
		LTM						

MMRP Costs

Total Funding through FY 2004: \$0 K

Prior Funding

FY	Phase	Site ID	Obligations	FY Total
2006	SI	PICA-001-R-01	\$99.0 K	\$1,089.0 K
		PICA-002-R-01	\$99.0 K	
		PICA-003-R-01	\$99.0 K	
		PICA-004-R-01	\$99.0 K	
		PICA-005-R-01	\$99.0 K	
		PICA-007-R-01	\$99.0 K	
		PICA-008-R-01	\$99.0 K	
		PICA-009-R-01	\$99.0 K	
		PICA-010-R-01	\$99.0 K	
		PICA-011-R-01	\$99.0 K	
		2007	SI IRA RAC SI	
PICA-004-R-01	\$110.5 K			
PICA-003-R-01	\$1,804.0 K			
PICA-001-R-01	\$2.5 K			
PICA-002-R-01	\$2.5 K			
PICA-003-R-01	\$2.5 K			
PICA-004-R-01	\$2.5 K			
PICA-005-R-01	\$2.5 K			
PICA-006-R-01	\$2.5 K			
PICA-007-R-01	\$2.5 K			
PICA-008-R-01	\$2.5 K			
2008	IRA SI	PICA-010-R-01	\$2.5 K	\$1,314.0 K
		PICA-011-R-01	\$2.5 K	
		PICA-003-R-01	\$321.0 K	
		PICA-004-R-01	\$960.0 K	
		PICA-001-R-01	\$3.0 K	
		PICA-002-R-01	\$3.0 K	
		PICA-003-R-01	\$3.0 K	
		PICA-004-R-01	\$3.0 K	
		PICA-005-R-01	\$3.0 K	
		PICA-006-R-01	\$3.0 K	
		PICA-007-R-01	\$3.0 K	
2009	IRA	PICA-008-R-01	\$3.0 K	\$8,838.0 K
		PICA-009-R-01	\$3.0 K	
		PICA-010-R-01	\$3.0 K	
		PICA-011-R-01	\$3.0 K	
		PICA-003-R-01	\$1,414.0 K	
		PICA-006-R-01	\$1,210.0 K	
		PICA-007-R-01	\$5,750.0 K	
		PICA-008-R-01	\$420.0 K	

MMRP Costs

RI/FS	PICA-001-R-01	\$2.0 K
	PICA-003-R-01	\$2.0 K
	PICA-004-R-01	\$10.0 K
	PICA-005-R-01	\$2.0 K
	PICA-006-R-01	\$2.0 K
	PICA-008-R-01	\$2.0 K
	PICA-010-R-01	\$2.0 K
	PICA-012-R-01	\$10.0 K
	PICA-013-R-01	\$2.0 K
	PICA-014-R-01	\$10.0 K

TOTAL PRIOR FUNDING: \$13,183.0 K

Current Requirements

FY	Phase	Site ID	Requirements	FY Total
TOTAL CURRENT REQUIREMENTS:				\$.0 K

TOTAL FUTURE REQUIREMENTS: \$68,923.0 K

TOTAL PROGRAM COST: \$82,106.0 K

Required Cost-to-Complete

SITE ID	SITE NAME		FY11	FY12	FY13	FY14	FY15	FY16	FY17	Out Yrs	Total
ACTIVITY	Phase										
PBA@MR PICA	PBA for MR sites at Picatinny										
	RI/FS	505	74	74	74	81					808
	Site Total										808
PICA-001-R-01	Former Munitions & Propellant Test Area										
	RI/FS			325							325
	RD				50						50
	RA(C)						833				833
	LTM							17		188	205
	Site Total										1413
PICA-003-R-01	1926 Explosion Radius										
	RI/FS			325							325
	RD				350						350
	IRA	500	510								1010
	RA(C)						14005				14005
	LTM							17		188	205
	Site Total										15895
PICA-004-R-01	1926 EXPLOSION SITE-TD										
	RI/FS			325							325
	RD				317						317
	RA(C)						12684				12684
	LTM									205	205
	Site Total										13531
PICA-005-R-01	Green Pond										
	RI/FS			325							325
	RD				50						50
	RA(C)						249				249
	LTM							17		188	205
	Site Total										829
PICA-006-R-01	Former Operational Areas										
	RI/FS			325							325
	RD				435						435
	IRA	510	500								1010
	RA(C)						17417				17417
	LTM							17		188	205
	Site Total										19392

Required Cost-to-Complete

SITE ID	SITE NAME	Phase	FY11	FY12	FY13	FY14	FY15	FY16	FY17	Out Yrs	Total	
ACTIVITY												
PICA-008-R-01	Lakes											
	RI/FS		325								325	
	RD				50						50	
	RA(C)							8362			8362	
	LTM								17	188	205	
										Site Total	8942	
PICA-010-R-01	Shell Burial Grounds											
	RI/FS		325								325	
	RD				50						50	
	RA(C)							415			415	
	LTM								17	188	205	
										Site Total	995	
PICA-012-R-01	Lake Denmark - Off-Post											
	RI/FS		325								325	
	RD				88						88	
	RA(C)							3535			3535	
	LTM								17	188	205	
										Site Total	4153	
PICA-013-R-01	Inactive Munitions Waste Pit											
	RI/FS		325								325	
	RD				36						36	
	RA(C)							1457			1457	
	LTM								17	188	205	
										Site Total	2023	
PICA-014-R-01	Inactive Munitions Waste Pit - TD											
	RI/FS		325								325	
	RD				14						14	
	RA(C)							398			398	
	LTM								17	188	205	
										Site Total	942	
Totals												
			1515	1734	2991	1197	12765	46671	153		1897	68923
										Site Total	68923	

Programmed Cost-to-Complete

SITE ID	SITE NAME		Phase	FY11	FY12	FY13	FY14	FY15	FY16	FY17	Out Yrs	Total
ACTIVITY												
PBA@MR PICA	PBA for MR sites at Picatinny											
	RI/FS	505	74	74	74	81						808
											Site Total	808
PICA-001-R-01	Former Munitions & Propellant Test Area											
	RI/FS			325								325
	RD				50							50
	RA(C)							833				833
	LTM								17		188	205
											Site Total	1413
PICA-003-R-01	1926 Explosion Radius											
	RI/FS			325								325
	RD				350							350
	IRA	500	510									1010
	RA(C)							14005				14005
	LTM								17		188	205
											Site Total	15895
PICA-004-R-01	1926 EXPLOSION SITE-TD											
	RI/FS			325								325
	RD				317							317
	RA(C)							12684				12684
	LTM										205	205
											Site Total	13531
PICA-005-R-01	Green Pond											
	RI/FS			325								325
	RD				50							50
	RA(C)							249				249
	LTM								17		188	205
											Site Total	829
PICA-006-R-01	Former Operational Areas											
	RI/FS			325								325
	RD				435							435
	IRA	510	500									1010
	RA(C)							17417				17417
	LTM								17		188	205
											Site Total	19392

Programmed Cost-to-Complete

SITE ID	SITE NAME	Phase	FY11	FY12	FY13	FY14	FY15	FY16	FY17	Out Yrs	Total	
ACTIVITY												
PICA-008-R-01	Lakes											
	RI/FS		325								325	
	RD				50						50	
	RA(C)							8362			8362	
	LTM								17	188	205	
Site Total											8942	
PICA-010-R-01	Shell Burial Grounds											
	RI/FS		325								325	
	RD				50						50	
	RA(C)							415			415	
	LTM								17	188	205	
Site Total											995	
PICA-012-R-01	Lake Denmark - Off-Post											
	RI/FS		325								325	
	RD				88						88	
	RA(C)							3535			3535	
	LTM								17	188	205	
Site Total											4153	
PICA-013-R-01	Inactive Munitions Waste Pit											
	RI/FS		325								325	
	RD				36						36	
	RA(C)							1457			1457	
	LTM								17	188	205	
Site Total											2023	
PICA-014-R-01	Inactive Munitions Waste Pit - TD											
	RI/FS		325								325	
	RD				14						14	
	RA(C)							398			398	
	LTM								17	188	205	
Site Total											942	
Totals												
			1515	1734	2991	1197	12765	46671	153		1897	68923
Site Total											68923	

(this page intentionally left blank)

PICATINNY ARSENAL
Army Defense Environmental Restoration Program
Compliance Restoration

CR Summary

Installation Total Army Environmental Database-Restoration (AEDB-R) Sites/Closeout Sites Count: 2/0

Installation Site Types with Future and/or Underway Phases

- 1 Contaminated Ground Water
(CC-055)
- 1 Small Arms Range
(CC-057)

Most Widespread Contaminants of Concern

Metals, Semi-volatiles (SVOC), Volatiles (VOC)

Media of Concern

Groundwater, Sediment, Soil

Completed Remedial Actions (Interim Remedial Actions/ Final Remedial Actions (IRA/FRA))

Site ID	Site Name	Action	Remedy	FY	Cost
N/A					

Total Environmental Restoration, Army (ER,A) Funding

Prior Funding: \$0 K
Current Requirements: \$0 K
Future Requirements: \$1,955.0 K

Duration of CR

Date of CR Inception: 200201
Estimated Date for Remedy-In-Place (RIP)/Response Complete (RC): 201212/201212
Date of CR completion including Long Term Management (LTM): 201609

CR Contamination Assessment

Contamination Assessment Overview

The two CC sites that have been added to the AEDB-R program include the Former Skeet Range and the MTBE plume.

The Former Skeet Range or CC-057:

The Former Skeet Range or CC-57 is very contaminated with lead for the operation of the skeet range. The former Skeet Range is located approximately 150 feet northwest of Site 180 on the southern end of PTA on the eastern side of GPB. The former Skeet Range is bounded by Site 19 to the north-northwest, Site 180 to the south and southeast, Site 34 to the southwest, and the GPB to the west. Large portions of the southern end of PTA were subject to landfilling to increase the amount of usable land. A review of aerial photography confirmed that extensive landfilling activities occurred in this area including Site 180 and the Skeet Range.

The range was constructed in the 1950s and has been used for recreational trap and skeet shooting since construction. The range consists of three buildings - 1181, 1182, and 1181A, and several asphalt walkways through an open grassy area where the shooting occurs. As part of the phase I RI, a detailed SI was conducted of the range on July 19, 1994 (Dames and Moore, 1995). At the time, Buildings 1181 and 1182 were used to launch the traps and to store cases of targets. Building 1181A contained several barbecue grills and site maintenance equipment such as a wheelbarrow, rakes, and plywood. The shooters faced north and shot towards a heavily wooded area. Dames and Moore noted that the range contained accumulated bulk lead shot and clay fragments from the historical use of the range. There was concern that the accumulated lead shot may represent an ecological concern. However, no further investigation was recommended due to the ongoing activities at the range.

From 1991 to 2007, Site 180 was investigated which included the northeastern push out boundary toward the area of the Skeet Range. Buried debris was found along this push out boundary in 2005 and subsequently additional environmental sampling and debris removal were performed. After sampling was completed from 2005 to 2007, ARCADIS issued a letter to the Army suggesting that the lead identified in Sample 180SS-15 (is outside the boundary of Site 180), is related to the historical use of the range, and therefore should be addressed as a separate site. Thus, the Army agreed to further investigate the lead contamination to identify the potential source of the elevated lead levels.

Analytical results from soil/sediment and surface water sampling as part of a Lead Investigation Data Report, performed in June 2008 by Shaw, indicated several surface soil samples exceeded the soil LOC for lead. A subsurface soil sample collected in the area also contained a lead concentration above the soil LOC. Furthermore, sediment and surface water samples collected from a drainage ditch in the area revealed concentrations of lead above the sediment and surface water LOCs. Previous surface soil sampling in the area performed by IT Corporation in October 2002 also found elevated concentrations of PAHs above applicable LOCs in the area of the former Skeet Range.

MTBE groundwater plume or the CC-55:

Exceedances of the LOC for MTBE were detected in groundwater samples collected from well 13MW-5 in Site 11 (Area 649) during sampling conducted as part of the 600 Area data report/FS. One surface water MTBE LOC exceedance was also detected in a downstream sample collected in January 2006. The 600 Area FS focused on groundwater and surface water contamination derived from Site 12, and the MTBE groundwater exceedances were not addressed further in the FS. Further investigation and sampling of Site 11 is proposed in the subject 600 Area MTBE Work Plan, which is intended to further delineate and monitor MTBE concentrations in groundwater and surface water. Potential sources include past gasoline spills at Site 11 ranges.

Site 11 MTBE groundwater data were collected as part of the 600 Area FS. Two MTBE groundwater LOC exceedances were detected at well 13MW-5 in July 2006 (130 ug/l) and November 2006 (140 ug/l). The LOC for MTBE is 70 ug/l. MTBE was also detected at 13MW-5 in more recent sampling conducted in March 2007 (51 ug/l), June 2007 (35 ug/l), October 2007 (21 ug/l), and July 2008 (10 ug/l). MTBE was not detected in nearby sidegradient bedrock wells 13MW-9 and 13MW-11. Low concentrations of MTBE were detected at wells 13MW-3 and 4, but may be derived from a source in Site 12.

Site 11 surface water sampling data were collected as part of the 600 Area Investigation. An MTBE exceedance of 3.9 ug/l was detected at surface water sample location 13SW-6 in January 2006. The LOC for MTBE in surface water is 2.6 ug/l. Low concentrations of MTBE were also detected at 13SW-6 during sampling in October 2007 (0.39J ug/l) and June 2008 (0.22J ug/l) and upstream sample location 11SW-3 in October 2004 (0.36J ug/l), June 2007 (0.41J ug/l), October 2007 (1.7 ug/l), and June 2008 (1.2 ug/l). MTBE was not detected in the Building 650 Area Pond (11SW-1), but was detected at downstream sample location 11SW-2 in November 2004 (0.36J ug/l) and November 2006 (1.8 ug/l). Three rounds of samples were not collected at 11SW-2 due to dry conditions. MTBE was not detected in sediment samples collected at the Site 11 sample locations.

Low concentrations of toluene were also detected at surface water sampling location 11SW-1 in November 2004 (0.22J ug/l) and

CR Contamination Assessment

Contamination Assessment Overview

June 2008 (0.23J ug/l) and at 11SW-3 in November 2004 (1.2 ug/l).

Cleanup Exit Strategy

Former Skeet Range (CC-057) will follow the RI-FS-ROD-RD path unless the levels of lead are so significant that they require a removal action.

The MTBE plume (CC-055) most recent results will be incorporated into the PICA 058 Site or the 600 Hill PP/ROD. We expect the levels to decrease where only one to two more rounds will be required.

CR Previous Studies

	Title	Author	Date
2009	Skeet Range Workplan	Shaw Environmental	DEC-2009

(this page intentionally left blank)

PICATINNY ARSENAL

Compliance Restoration

Site Descriptions

Site Name: MTBE Contaminated GW in 600 Area

STATUS

Regulatory Driver: CERCLA
Contaminants of Concern: Metals, Semi-volatiles (SVOC), Volatiles (VOC)
Media of Concern: Groundwater, Sediment, Soil

Phases	Start	End
PA.....	200201.....	200402
SI.....	200402.....	200504
RI/FS.....	200506.....	201105
RA(C).....	201106.....	201111
LTM.....	201111.....	201212
RIP Date:	N/A	
RC Date:	201111	

SITE DESCRIPTION

The investigation of the groundwater was initiated under the IRP with the identification of TCE and MTBE in the service well for the AWDF. Numerous wells were subsequently installed and sampled where MTBE levels were detected. Upgradient from the AWDF, well 3MW-5 was installed immediately downgradient of the testing area at Building 640 where fast cook-off testing occurs. Fast cook-off testing includes the burning of packages in gasoline-filled burn pans. Apparently, when the test item functions high order, it could splash some of the gas on the ground. Prior to 2006, the fast cook-off testing was conducted in burn pans placed directly on the soil without secondary containment.

In 2006, a concrete pad was constructed for the performance of the testing, which should eliminate the MTBE migration into the soil and shallow bedrock aquifer. Since current testing is the apparent cause of the MTBE contamination, the investigation and cleanup are not ER,A fundable.

RDX in surface water is being investigated under the ER,A-funded investigation. If it is determined that the RDX in the surface water is a result of current activities rather than historic activities, it will be integrated either into this site or identified as a new compliance cleanup site. This site represents the MTBE-contaminated groundwater in the bedrock. The levels of MTBE in groundwater from well 3MW-5 are up to 140 ug/l. MTBE has also been detected in the other wells, including the well next to the operational range in the 600 Area.

In December 2009, an additional bedrock borehole was drilled in the 600 Area to investigate the MTBE concentrations. Geophysical logging of the open bedrock borehole was performed in February 2010. Upon evaluation of the geophysical results, a new bedrock well is completed within the open borehole; groundwater and surface water samples was collected in the area to further evaluate the MTBE levels.

CLEANUP/EXIT STRATEGY

Following receipt and review of the results from the sampling from the newly installed wells and surface water in 2010, one of three options will be completed. Either a focused FS will be prepared to evaluate potential remedial alternatives for the site, additional sampling will be conducted as part of the PICA-058 investigation, or the site will be NFA.

STATUS

Regulatory Driver: OTHER
Contaminants of Concern: Metals, Semi-volatiles (SVOC), Volatiles (VOC)
Media of Concern: Groundwater, Sediment, Soil

Phases	Start	End
PA.....	200811.....	200901
SI.....	200901.....	201006
RI/FS.....	201003.....	201206
IRA.....	201212.....	201212
LTM.....	201212.....	201609
RIP Date:	N/A	
RC Date:	201212	

SITE DESCRIPTION

The site was used as a skeet range and archery range, but aerial photos indicate there were extensive historical fill operations in this area. The area is open to hunters and MMRP issues are also present within this site.

Documentation regarding ER,A 180/PICA 093 can be used for information on this site.

One high level of lead in the soil was first encountered in 2006 but further investigation was required to determine if the site was ER,A eligible due to historic landfilling activities (as an extension of Site 180/PICA 093). An investigation in 2008 further defined the problem and determined the lead was from activities related to the recently closed Skeet Range.

The area of the currently-known soil contamination is approximately two acres; however, the extent of the contamination from a horizontal and vertical extent has not been determined. The known contaminated area, which is located within the shot fall zone of the Former Skeet Range, is situated within a floodplain and partially within a wetland.

Lead contamination in the soils ranges up to 209,000 mg/kg. Lead contamination in sediment ranges up to 21,500 mg/kg and the surface water levels were as high as 354 ug/L. These levels are orders of magnitude above the State regulatory limit and mostly exceed the Lead Model risk.

The 2008 Site 180 and Former Skeet Range Lead Investigation Data Report was provided to the USEPA and the NJDEP in December 2008. The USEPA responded with a letter requesting that the Army make every effort to facilitate timely follow-up sampling and remedy implementation at the Former Skeet Range.

An abbreviated work plan to characterize lead and PAH concentrations, which are common constituents in shotgun ammunition and clay targets, respectively, was approved by the regulators. Fieldwork for this SI was conducted in spring 2010 and a contract was awarded in FY10 for an RI.

CLEANUP/EXIT STRATEGY

An RI to completely characterize the nature of the site contamination was funded in 2010. The RI will include HHRA and ERAs for the site.

It is assumed that contaminated soil will be excavated and/or covered and LTM will be conducted for a five-year review cycle.

Site Closeout (No Further Action) Summary

Site ID	Site Name	NFA Date	Documentation
There are no NFA sites			

CR Schedule

Date of CR Inception: 200201

Past Phase Completion Milestones

2004

PA (CC-055 - MTBE Contaminated GW in 600 Area)

2005

SI (CC-055 - MTBE Contaminated GW in 600 Area)

2009

PA (CC-057 - Former Skeet Range)

Projected Phase Completion Milestones

See attached schedule

Projected Record of Decision (ROD)/Decision Document (DD) Approval Dates

To Be Determined

Final RA(C) Completion Date: 201111

Schedule for Next Five-Year Review: 2011

Estimated Completion Date of CR at Installation (including LTM phase): 201609

PICATINNY ARSENAL CR Schedule

= phase underway

SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
CC-055	MTBE Contaminated GW in 600 Area	RI/FS						
		RA(C)						
		LTM						
SITE ID	SITE NAME	PHASE	FY11	FY12	FY13	FY14	FY15	FY16+
CC-057	Former Skeet Range	RI/FS						
		IRA						
		LTM						

CR Costs

Total Funding through FY 2008: \$0 K

Prior Funding

FY	Phase	Site ID	Obligations	FY Total
TOTAL PRIOR FUNDING:				\$0 K

Current Requirements

FY	Phase	Site ID	Requirements	FY Total
TOTAL CURRENT REQUIREMENTS:				\$0 K

TOTAL FUTURE REQUIREMENTS: \$1,955.0 K

TOTAL PROGRAM COST: \$1,955.0 K

Required Cost-to-Complete

SITE ID	SITE NAME		FY11	FY12	FY13	FY14	FY15	FY16	FY17	Out Yrs	Total
ACTIVITY	Phase										
CC-055	MTBE Contaminated GW in 600 Area										
	RA(C)	29									29
	LTM		15	14							29
Site Total											58
CC-057	Former Skeet Range										
	RI/FS	147									147
	IRA			1619							1619
	LTM			33	33	32	33				131
Site Total											1897
Totals											
		176	15	1666	33	32	33				1955
Site Total											1955

Programmed Cost-to-Complete

SITE ID	SITE NAME		FY11	FY12	FY13	FY14	FY15	FY16	FY17	Out Yrs	Total
ACTIVITY	Phase										
CC-055	MTBE Contaminated GW in 600 Area										
	RA(C)	29									29
	LTM		15	14							29
Site Total											58
CC-057	Former Skeet Range										
	RI/FS	147									147
	IRA			1619							1619
	LTM			33	33	32	33				131
Site Total											1897
Totals											
		176	15	1666	33	32	33				1955
Site Total											1955

Costs - Combined Requirements Spreadsheet

PROGRAM	SITE ID		SITE NAME					Out Yrs	Total	
	Phase	FY11	FY12	FY13	FY14	FY15	FY16			FY17
ACTIVITY										
IRP	PBC Picatinny		PBC							
	RA(O)	2000	2000	225	100				4325	
IRP	PICA-001		INACTIVE TETRYL WASTE PITS (SITES 17/18)							
	RA(O)					12	13		41	66
Soil Excavation, FS, GW Investigaion, and LUCs										
IRP	PICA-002		LOWER BURNING GROUND (SITE 34)							
	RA(O)					20	20		189	229
Capping System, Maintenance, and LUCs										
IRP	PICA-006		GUNCOTTON LINE (SITE 16)							
	LTM					10	10		46	66
FS and LUCs										
IRP	PICA-008		INACT. ROCKET FUEL TEST Areas							
	RA(O)					47	30		300	377
Bioremediation, MNA, LTM, adn LUCs										
IRP	PICA-011		BLDG 60 SATELITE WSTE ACCOM AREA(SITE122							
	LTM					10	9		10	29
FS and LUCs										
IRP	PICA-013		OPTS PROTO PROC FAC SITE BLDG 91(SITE78)							
	LTM					20	20		66	106
FS, PP, ROD, MNA, and LTM										
IRP	PICA-015		LAKE DENMARK (SITE 54)							
	LTM					10	10		41	61
FS, PP, ROD, LTM, and LUCs										
IRP	PICA-020		PYROTECHNIC DEMO AREA (SITE 19)							
	LTM					15	15		44	74
LUCs										
IRP	PICA-022		POWER PLNT/HAZ WST TNKS/PROPELL PRD							
	LTM					10	10		39	59
FS, PP, ROD, GW Monitoring, LTM, and LUCs										
IRP	PICA-050		FORMER REACT MTRS/RCKT FUEL TST A 1500							
	LTM					10	4		15	29
FS and GW Monitoring										
IRP	PICA-057		PICATINNY LAKE (SITE 53)							
	LTM					10	11		40	61
FS, PP, ROD, and LUCs										
IRP	PICA-058		600 HILL GROUNDWATER PLUME							
	RD	60								60
	RA(C)	22								22
	LTM	85		13	13	13	13	13	100	250
GW Investigation and LTM										

Costs - Combined Requirements Spreadsheet

PROGRAM	SITE ID	SITE NAME	FY11	FY12	FY13	FY14	FY15	FY16	FY17	Out Yrs	Total
ACTIVITY	Phase										
IRP	PICA-065	POST FARM LANDFILL (SITE 23)									
	LTM					20	6			30	56
GW Monitoring											
IRP	PICA-066	SANITARY LANDFILL(NEAR SITE 20)SITE 24									
	LTM					10	10			36	56
Cap Maintenance and LUCs											
IRP	PICA-067	SANITARY LANDFILL(NEAR SITE 26)SITE 25									
	LTM					12	12			50	74
LTM											
IRP	PICA-071	DRUM STRG AREA(B31 YARD) SITE 29									
	LTM					20	20			76	116
FS, PP, ROD, GW Monitoring, and LUCs											
IRP	PICA-072	FORMER GAS STATION/ DRMO(SITE 31)									
	RA(O)									164	164
Soil Excavation, GW Monitoring, and LUCs											
IRP	PICA-075	EQPMT & WASTE STORAGE IN 3000-AREA									
	LTM					5	5			19	29
FS, PP, ROD, Soil Excavation, Vegetative Cap, LTM, and LUCs											
IRP	PICA-076	FORM METL PLATG WSTWTR FAC/LAGOONS B-24									
	RA(O)									254	254
MNA, Compliance Sampling, and LUCs											
IRP	PICA-077	Area E Groundwater (Site 38)									
	LTM					15	15			44	74
MNA and LUCs											
IRP	PICA-079	ORDNANCE/EXPLOSIVE BLDGS 800 AREA									
	RA(O)					40	40			307	387
PP, ROD, Enhanced Bioremediation, MNA, Five Year Reviews, and LUCs											
IRP	PICA-085	BLDS IN 500-AREA									
	LTM					10	10			39	59
FS, PP, ROD, Soil Excavation, and LUCs											
IRP	PICA-091	BLDGS IN 200-AREA									
	LTM					10	10			38	58
FS, PP, ROD, Vegetative Cover, and LUCs											
IRP	PICA-093	WASTE BURIAL AREA NEAR SITES 19&34(180)									
	LTM					8	8			30	46
LUCs											
IRP	PICA-096	BLDG 22,PRECISION MACHINE SHOP(SITE 117)									
	LTM					20	20			76	116
PP, ROD, and LUCs											
IRP	PICA-097	BLD 41,PESTICIDE STR & FORM OIL/W SEP									
	LTM									58	58
FS, PP, ROD, and LUCs											

Costs - Combined Requirements Spreadsheet

PROGRAM	SITE ID	SITE NAME								Out Yrs	Total
ACTIVITY	Phase	FY11	FY12	FY13	FY14	FY15	FY16	FY17			
IRP	PICA-102	FORMER WASTE DUMP/CHEMICAL LAB									
	LTM						10	11		40	
LUCs											
IRP	PICA-108	BLDGS in 400/300 AREA									
	LTM						4	5		20	
FS, PP, ROD, and LUCs. Annual marsh monitoring.											
IRP	PICA-111	FORMER BLDG 435,PROPELLANT SOLV MIXING									
	RD	8								8	
	RA(C)	6								6	
	LTM		17			5	5	5		15	
FS, PP, ROD, and LUCs											
IRP	PICA-122	PROPELLANT TESTING (BLDG 197) SITE 126									
	LTM						5	5		19	
FS, PP, ROD, and LUCs											
IRP	PICA-134	R&D LAB/Chem Storage 3000-Area									
	LTM						5	5		19	
FS, PP, ROD, and LUCs											
IRP	PICA-135	BLDGS IN THE 900-AREA									
	LTM									58	
FS, PP, ROD, and LUCs											
IRP	PICA-136	HIGH PRESSURE BOILER (BLDG 3013) SITE 79									
	LTM						5	5		19	
FS, PP, ROD, Soil Excavation, and LUCs											
IRP	PICA-143	ORDNANCE FAC (BLDGS 717,722,732)SITE 108									
	LTM						10	10		39	
FS, PP, ROD, and LUCs											
IRP	PICA-155	TECUP BUILDINGS SITE 178									
	LTM						10	10		41	
FS, PP, ROD, and LUCs											
IRP	PICA-162	SHELL BURIAL AREAS NEAR SITE 5									
	LTM						5	5		19	
FS, PP, ROD, LTM, and LUCs											
IRP	PICA-163	Propellnt/Rcket Prod 1300/1400 Area									
	LTM						5	5		49	
FS, PP, ROD, and LUCs											
IRP	PICA-171	ORDNANCE BLDG/EXPLOSIVES PROD.									
	LTM						7	8		44	
FS, PP, ROD, and LUCs											
IRP	PICA-175	ORDNANCE BLDGS in 600-AREA									
	LTM						5	5		19	
FS, PP, ROD, and LUCs											

Costs - Combined Requirements Spreadsheet

PROGRAM	SITE ID		SITE NAME					Out Yrs	Total	
	Phase	FY11	FY12	FY13	FY14	FY15	FY16			FY17
ACTIVITY										
IRP	PICA-184	BUILDINGS(1600,1601,1609,1610) SITE 94								
	LTM						10	10	40	60
FS, PP, ROD, and LUCs										
IRP	PICA-192	APPLE TREES RECREATIONAL AREA								
	LTM						5	5	49	59
FS, PP, ROD, and Cap Maintenance										
IRP	PICA-193	GREEN POND AND BEAR SWAMP BROOK SITE 190								
	LTM						5	5	46	56
Monitoring and LUCs										
IRP	PICA-195	BLDGS IN 1400/1300/3100/1000 AREAS								
	LTM						5	5	51	61
FS, PP, ROD, and LUCs										
IRP	PICA-199	FORMER PISTOL RANGE DUMP&NAVY MANURE PIT								
	LTM						5	5	49	59
FS, PP, ROD, Soil Excavation, Vegetative Cap, and LUCs										
IRP	PICA-200	AREA (L) OTHER BUILDINGS								
	LTM						5	5	18	28
FS, PP, ROD, and LUCs										
IRP	PICA-204	MID-VALLEY GROUNDWATER								
	LTM						126	126	511	763
PP, ROD, In-well Stripping, MNA, and LUCs										
IRP	PICA-205	AREA B GROUNDWATER								
	LTM						15	15	64	94
Hydrogen Release Compound Injection and Monitoring										
IRP	PICA-206	AREA C GROUNDWATER								
	LTM				74	74	75		222	445
ROD, GW Monitoring, Well Abandonment, and Five Year Reviews										
IRP	PICA-209	BUILDING 167, LOCOMOTIVE AREA, BLDG. 430								
	LTM								29	29
FS, PP, ROD, and LUCs										
									IRP Total	
		2181	2017	238	113	92	683	651	3632	9607
MMRP	PBA@MR PICA	PBA for MR sites at Picatinny								
	RI/FS	505	74	74	74	81				808
MMRP	PICA-001-R-01	Former Munitions&Propellant Test Area								
	RI/FS		325							325
	RD			50						50
	RA(C)					833				833
	LTM						17		188	205

Costs - Combined Requirements Spreadsheet

PROGRAM	SITE ID		SITE NAME					Out Yrs	Total
	Phase	FY11	FY12	FY13	FY14	FY15	FY16		
ACTIVITY									
MMRP	PICA-003-R-01		1926 Explosion Radius						
	IRA	500	510						1010
	RD				350				350
	RI/FS			325					325
	RA(C)					14005			14005
	LTM						17		188
MMRP	PICA-004-R-01		1926 EXPLOSION SITE-TD						
	RI/FS		325						325
	RD			317					317
	RA(C)					12684			12684
	LTM							205	205
MMRP	PICA-005-R-01		Green Pond						
	RI/FS			325					325
	RD				50				50
	RA(C)					249			249
	LTM						17		188
MMRP	PICA-006-R-01		Former Operational Areas						
	IRA	510	500						1010
	RD				435				435
	RI/FS			325					325
	RA(C)					17417			17417
	LTM						17		188
MMRP	PICA-008-R-01		Lakes						
	RI/FS		325						325
	RD				50				50
	RA(C)					8362			8362
	LTM						17		188
MMRP	PICA-010-R-01		Shell Burial Grounds						
	RI/FS			325					325
	RD				50				50
	RA(C)					415			415
	LTM						17		188
MMRP	PICA-012-R-01		Lake Denmark - Off-Post						
	RI/FS			325					325
	RD				88				88
	LTM						17		188
	RA(C)					3535			3535

Costs - Combined Requirements Spreadsheet

PROGRAM	SITE ID		SITE NAME							Out Yrs	Total
	Phase	FY11	FY12	FY13	FY14	FY15	FY16	FY17			
ACTIVITY											
MMRP	PICA-013-R-01		Inactive Munitions Waste Pit								
	RI/FS		325							325	
	RD			36						36	
	RA(C)					1457				1457	
	LTM						17		188	205	
MMRP	PICA-014-R-01		Inactive Munitions Waste Pit - TD								
	RI/FS		325							325	
	RA(C)					398				398	
	RD			14						14	
	LTM						17		188	205	
MMRP Total											
		1515	1734	2991	1197	12765	46671	153	1897	68923	
CR	CC-055		MTBE Contaminated GW in 600 Area								
	RA(C)	29								29	
	LTM		15	14						29	
CR	CC-057		Former Skeet Range								
	RI/FS	147								147	
	IRA		1619							1619	
	LTM		33	33	32	33				131	
CR Total											
		176	15	1666	33	32	33			1955	
Grand Total											
		3872	3766	4895	1343	12889	47387	804	5529	80485	

Costs - Combined Programmed Spreadsheet

PROGRAM ACTIVITY	SITE ID		SITE NAME					Out Yrs	Total	
	Phase	FY11	FY12	FY13	FY14	FY15	FY16			FY17
IRP	PBC Picatinny		PBC							
	RA(O)	2000	2000	225	100				4325	
IRP	PICA-001		INACTIVE TETRYL WASTE PITS (SITES 17/18)							
	RA(O)					12	13		41	66
Soil Excavation, FS, GW Investigaion, and LUCs										
IRP	PICA-002		LOWER BURNING GROUND (SITE 34)							
	RA(O)					20	20		189	229
Capping System, Maintenance, and LUCs										
IRP	PICA-006		GUNCOTTON LINE (SITE 16)							
	LTM					10	10		46	66
FS and LUCs										
IRP	PICA-008		INACT. ROCKET FUEL TEST Areas							
	RA(O)					47	30		300	377
Bioremediation, MNA, LTM, adn LUCs										
IRP	PICA-011		BLDG 60 SATELITE WSTE ACCOM AREA(SITE122							
	LTM					10	9		10	29
FS and LUCs										
IRP	PICA-013		OPTS PROTO PROC FAC SITE BLDG 91(SITE78)							
	LTM					20	20		66	106
FS, PP, ROD, MNA, and LTM										
IRP	PICA-015		LAKE DENMARK (SITE 54)							
	LTM					10	10		41	61
FS, PP, ROD, LTM, and LUCs										
IRP	PICA-020		PYROTECHNIC DEMO AREA (SITE 19)							
	LTM					15	15		44	74
LUCs										
IRP	PICA-022		POWER PLNT/HAZ WST TNKS/PROPELL PRD							
	LTM					10	10		39	59
FS, PP, ROD, GW Monitoring, LTM, and LUCs										
IRP	PICA-050		FORMER REACT MTRS/RCKT FUEL TST A 1500							
	LTM					10	4		15	29
FS and GW Monitoring										
IRP	PICA-057		PICATINNY LAKE (SITE 53)							
	LTM					10	11		40	61
FS, PP, ROD, and LUCs										
IRP	PICA-058		600 HILL GROUNDWATER PLUME							
	RD	60							60	
	RA(C)	22							22	
	LTM			13	13	13	13	13	185	250
GW Investigation and LTM										

Costs - Combined Programmed Spreadsheet

PROGRAM	SITE ID	SITE NAME	FY11	FY12	FY13	FY14	FY15	FY16	FY17	Out Yrs	Total
ACTIVITY	Phase										
IRP	PICA-065	POST FARM LANDFILL (SITE 23)									
	LTM							20	6	30	56
GW Monitoring											
IRP	PICA-066	SANITARY LANDFILL(NEAR SITE 20)SITE 24									
	LTM							10	10	36	56
Cap Maintenance and LUCs											
IRP	PICA-067	SANITARY LANDFILL(NEAR SITE 26)SITE 25									
	LTM							12	12	50	74
LTM											
IRP	PICA-071	DRUM STRG AREA(B31 YARD) SITE 29									
	LTM							20	20	76	116
FS, PP, ROD, GW Monitoring, and LUCs											
IRP	PICA-072	FORMER GAS STATION/ DRMO(SITE 31)									
	RA(O)									164	164
Soil Excavation, GW Monitoring, and LUCs											
IRP	PICA-075	EQPMT & WASTE STORAGE IN 3000-AREA									
	LTM							5	5	19	29
FS, PP, ROD, Soil Excavation, Vegetative Cap, LTM, and LUCs											
IRP	PICA-076	FORM METL PLATG WSTWTR FAC/LAGOONS B-24									
	RA(O)									254	254
MNA, Compliance Sampling, and LUCs											
IRP	PICA-077	Area E Groundwater (Site 38)									
	LTM							15	15	44	74
MNA and LUCs											
IRP	PICA-079	ORDNANCE/EXPLOSIVE BLDGS 800 AREA									
	RA(O)							40	40	307	387
PP, ROD, Enhanced Bioremediation, MNA, Five Year Reviews, and LUCs											
IRP	PICA-085	BLDS IN 500-AREA									
	LTM							10	10	39	59
FS, PP, ROD, Soil Excavation, and LUCs											
IRP	PICA-091	BLDGS IN 200-AREA									
	LTM							10	10	38	58
FS, PP, ROD, Vegetative Cover, and LUCs											
IRP	PICA-093	WASTE BURIAL AREA NEAR SITES 19&34(180)									
	LTM							8	8	30	46
LUCs											
IRP	PICA-096	BLDG 22,PRECISION MACHINE SHOP(SITE 117)									
	LTM							20	20	76	116
PP, ROD, and LUCs											
IRP	PICA-097	BLD 41,PESTICIDE STR & FORM OIL/W SEP									
	LTM									58	58
FS, PP, ROD, and LUCs											

Costs - Combined Programmed Spreadsheet

PROGRAM	SITE ID	SITE NAME							Out Yrs	Total
ACTIVITY	Phase	FY11	FY12	FY13	FY14	FY15	FY16	FY17		
IRP	PICA-102	FORMER WASTE DUMP/CHEMICAL LAB								
	LTM						10	11	40	61
LUCs										
IRP	PICA-108	BLDGS in 400/300 AREA								
	LTM						4	5	20	29
FS, PP, ROD, and LUCs. Annual marsh monitoring.										
IRP	PICA-111	FORMER BLDG 435,PROPELLANT SOLV MIXING								
	RD	8								8
	RA(C)	6								6
	LTM		17			5	5	5	15	47
FS, PP, ROD, and LUCs										
IRP	PICA-122	PROPELLANT TESTING (BLDG 197) SITE 126								
	LTM						5	5	19	29
FS, PP, ROD, and LUCs										
IRP	PICA-134	R&D LAB/Chem Storage 3000-Area								
	LTM						5	5	19	29
FS, PP, ROD, and LUCs										
IRP	PICA-135	BLDGS IN THE 900-AREA								
	LTM								58	58
FS, PP, ROD, and LUCs										
IRP	PICA-136	HIGH PRESSURE BOILER (BLDG 3013) SITE 79								
	LTM						5	5	19	29
FS, PP, ROD, Soil Excavation, and LUCs										
IRP	PICA-143	ORDNANCE FAC (BLDGS 717,722,732)SITE 108								
	LTM						10	10	39	59
FS, PP, ROD, and LUCs										
IRP	PICA-155	TECUP BUILDINGS SITE 178								
	LTM						10	10	41	61
FS, PP, ROD, and LUCs										
IRP	PICA-162	SHELL BURIAL AREAS NEAR SITE 5								
	LTM						5	5	19	29
FS, PP, ROD, LTM, and LUCs										
IRP	PICA-163	Propellnt/Rcket Prod 1300/1400 Area								
	LTM						5	5	49	59
FS, PP, ROD, and LUCs										
IRP	PICA-171	ORDNANCE BLDG/EXPLOSIVES PROD.								
	LTM						7	8	44	59
FS, PP, ROD, and LUCs										
IRP	PICA-175	ORDNANCE BLDGS in 600-AREA								
	LTM						5	5	19	29
FS, PP, ROD, and LUCs										

Costs - Combined Programmed Spreadsheet

PROGRAM	SITE ID		SITE NAME							Out Yrs	Total
	Phase	FY11	FY12	FY13	FY14	FY15	FY16	FY17			
ACTIVITY											
IRP	PICA-184	BUILDINGS(1600,1601,1609,1610) SITE 94									
	LTM					10	10		40	60	
FS, PP, ROD, and LUCs											
IRP	PICA-192	APPLE TREES RECREATIONAL AREA									
	LTM					5	5		49	59	
FS, PP, ROD, and Cap Maintenance											
IRP	PICA-193	GREEN POND AND BEAR SWAMP BROOK SITE 190									
	LTM					5	5		46	56	
Monitoring and LUCs											
IRP	PICA-195	BLDGS IN 1400/1300/3100/1000 AREAS									
	LTM					5	5		51	61	
FS, PP, ROD, and LUCs											
IRP	PICA-199	FORMER PISTOL RANGE DUMP&NAVY MANURE PIT									
	LTM					5	5		49	59	
FS, PP, ROD, Soil Excavation, Vegetative Cap, and LUCs											
IRP	PICA-200	AREA (L) OTHER BUILDINGS									
	LTM					5	5		18	28	
FS, PP, ROD, and LUCs											
IRP	PICA-204	MID-VALLEY GROUNDWATER									
	LTM					126	126		511	763	
PP, ROD, In-well Stripping, MNA, and LUCs											
IRP	PICA-205	AREA B GROUNDWATER									
	LTM					15	15		64	94	
Hydrogen Release Compound Injection and Monitoring											
IRP	PICA-206	AREA C GROUNDWATER									
	LTM				74	74	75		222	445	
ROD, GW Monitoring, Well Abandonment, and Five Year Reviews											
IRP	PICA-209	BUILDING 167, LOCOMOTIVE AREA, BLDG. 430									
	LTM								29	29	
FS, PP, ROD, and LUCs											
										IRP Total	
		2096	2017	238	113	92	683	651	3717	9607	
MMRP	PBA@MR PICA	PBA for MR sites at Picatinny									
	RI/FS	505	74	74	74	81				808	
MMRP	PICA-001-R-01	FormerMunitions&PropellantTest Area									
	RI/FS		325							325	
	RD			50						50	
	RA(C)					833				833	
	LTM						17		188	205	

Costs - Combined Programmed Spreadsheet

PROGRAM ACTIVITY	SITE ID		SITE NAME					Out Yrs	Total
	Phase	FY11	FY12	FY13	FY14	FY15	FY16		
MMRP	PICA-003-R-01		1926 Explosion Radius						
	IRA	500	510						1010
	RD				350				350
	RI/FS		325						325
	RA(C)					14005			14005
	LTM						17	188	205
MMRP	PICA-004-R-01		1926 EXPLOSION SITE-TD						
	RI/FS		325						325
	RD			317					317
	RA(C)					12684			12684
	LTM							205	205
MMRP	PICA-005-R-01		Green Pond						
	RI/FS		325						325
	RD			50					50
	RA(C)					249			249
	LTM						17	188	205
MMRP	PICA-006-R-01		Former Operational Areas						
	IRA	510	500						1010
	RD				435				435
	RI/FS		325						325
	RA(C)					17417			17417
	LTM						17	188	205
MMRP	PICA-008-R-01		Lakes						
	RI/FS		325						325
	RD			50					50
	RA(C)					8362			8362
	LTM						17	188	205
MMRP	PICA-010-R-01		Shell Burial Grounds						
	RI/FS		325						325
	RD			50					50
	RA(C)					415			415
	LTM						17	188	205
MMRP	PICA-012-R-01		Lake Denmark - Off-Post						
	RI/FS		325						325
	RD			88					88
	LTM						17	188	205
	RA(C)					3535			3535

Costs - Combined Programmed Spreadsheet

PROGRAM	SITE ID		SITE NAME								Out Yrs	Total
	Phase	FY11	FY12	FY13	FY14	FY15	FY16	FY17				
ACTIVITY												
MMRP	PICA-013-R-01		Inactive Munitions Waste Pit									
	RI/FS		325								325	
	RD			36							36	
	RA(C)					1457					1457	
	LTM						17		188		205	
MMRP	PICA-014-R-01		Inactive Munitions Waste Pit - TD									
	RI/FS		325								325	
	RA(C)					398					398	
	RD			14							14	
	LTM						17		188		205	
MMRP Total												
		1515	1734	2991	1197	12765	46671	153		1897	68923	
CR	CC-055		MTBE Contaminated GW in 600 Area									
	RA(C)	29									29	
	LTM		15	14							29	
CR	CC-057		Former Skeet Range									
	RI/FS	147									147	
	IRA			1619							1619	
	LTM		33	33	32	33					131	
CR Total												
		176	15	1666	33	32	33				1955	
Grand Total												
		3787	3766	4895	1343	12889	47387	804		5614	80485	

Community Involvement

Technical Review Committee (TRC): None
Community Involvement Plan (Date Published): 200812
Restoration Advisory Board (RAB): RAB established 199512
RAB Adjournment Date: N/A
RAB Adjournment Reason: None

Additional Community Involvement Information

The surrounding community for PTA includes the towns of Dover, Jefferson, Rockaway, Denville, and the Borough of Wharton. In 1989 a TRC was formed to address citizen concerns over environmental issues at the arsenal. In December 1995, the TRC evolved into the RAB. This board includes representatives of the Army, the USEPA Region 2, the NJDEP, representatives of the surrounding towns from Dover, Jefferson, Rockaway, and Denville, the Borough of Wharton, the Rockaway Township Environmental Commission, a union representative from PTA, the New Jersey Institute of Technology, and citizens from the surrounding communities.

PTA follows all Army and USEPA guidance relating to public noticing and public meetings for PPs and signed RODs.

The Army has revised the community relations plan to include both the MMRP and the IRP and provided that to both the regulators, RAB, and TAPP contractor in a PDF format or hard copy if required.

The RAB expressed an interest in the TAPP program and PTA was one of the first installations to hire a TAPP contractor. The final purchase order for the current TAPP extension is scheduled for the summer of 2009. To continue TAPP involvement at PTA, another waiver request must be submitted by the RAB and approved by the Army. The Army had decided not to allow the TAPP contractor to attend partnering and technical meetings between the Army and the regulators, IAP meetings, and RAB meetings.

The contractor also is provided all technical documents and a copy of all correspondence to and from the regulators.

The TAPP contractor also provides frequent updates of the technical issues to the RAB and resolutions from the regulatory meeting and comments to PPs as requested by the RAB.

During the latest period, some of the more noteworthy events included:

- Election of the civilian co-chair in calendar year 2010.
- Continued meetings on roughly a quarterly basis and sometimes combined with public meetings for PPs.
- The Army has approved the petition for the second waiver request for additional funds for the RAB.
- Continuation of the RAB website (<http://www.paerab.us>). The site includes newsletters written by the TAPP contractor.
- RAB approval of newsletters developed by the TAPP. (These newsletters appear on the RAB website and have been distributed to both mayors and to others in the surrounding localities).
- Public notice of the PPs and RODs for PICA-079 (Group 1), PICA-008 (Group 3), PICA-013 (Plume near Building 91), and PICA-058 (600 Hill Groundwater) sites have occurred in FY10.

Administrative Record is located at

Environmental Affairs Division
US Army Installation Management Agency
Building 319, Picatinny Arsenal 07806: Call for appointment at 973-724-6748 or email at ted.gabel@us.army.mil

Information Repository is located at

Rockaway Library
61 Mount Hope Road
Rockaway, NJ 07866

Community Involvement

973.627.2344

and

Morris County Library
30 East Hanover Road
Whippany, NJ 07981
973.285.6930

Current Technical Assistance for Public Participation (TAPP): 200008

TAPP Title: TAPP Contract

Potential TAPP: Picatinny has contracted out the services of the existing TAPP contractor to continue for services after the Baltimore Corps of Engineers contract.

(this page intentionally left blank)